
INSTALLATION RESTORATION PROGRAM


SOUTH DAKOTA NATIONAL GUARD
JOE FOSS FIELD, SIOUX FALLS, SOUTH DAKOTA

SITE INVESTIGATION REPORT

FINAL

February 1996

19971010 079

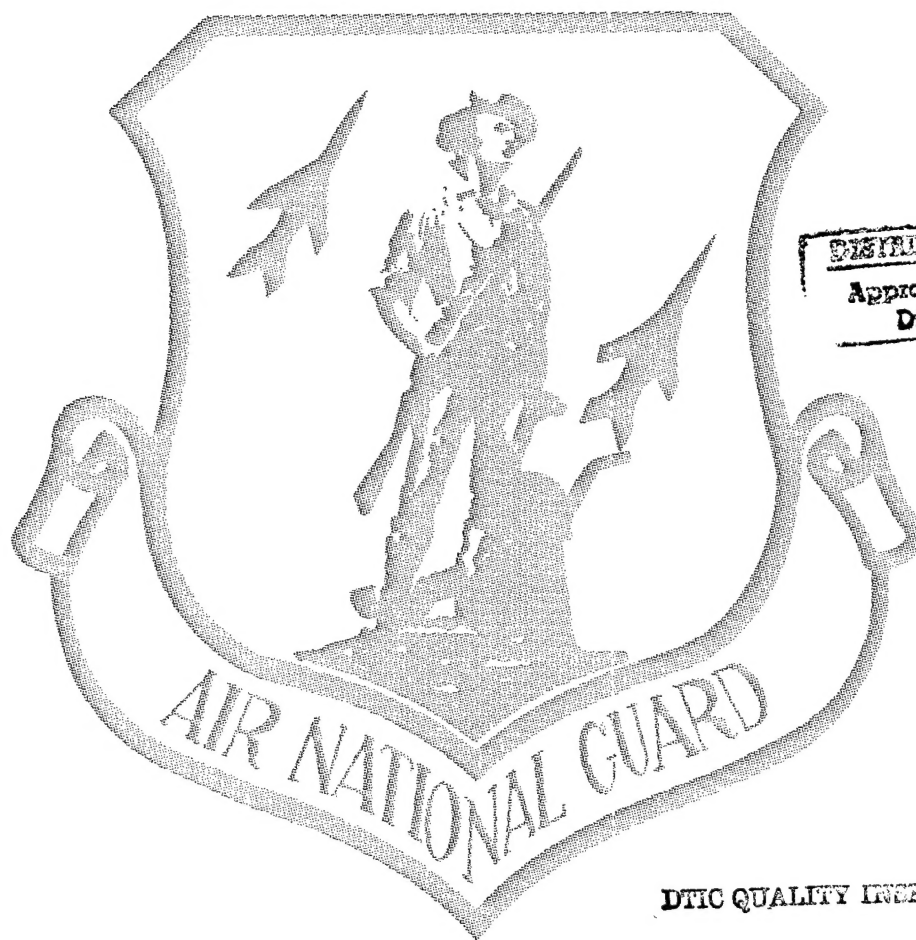

DTIC QUALITY INSPECTED 3

SCIENCE APPLICATIONS INTERNATIONAL CORPORATION
1710 Goodridge Drive
McLean, Virginia 22102
Under Contract No. DAHA90-94-D-0007

Public reporting burden for this information is estimated to average 1 hour per response, including the time to review instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Washington Service Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302 and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188) Washington, DC 20503

1. Agency Use Only (Leave Blank)		2. R		3. Report Type and Dates Covered Site Investigation Report	
4. Title and Subtitle Site Investigation Report for IRP Site No. 12 and 13, South Dakota Air National Guard, 114th Fighter Wing, Joe Foss Field, Sioux Falls, South Dakota - Volume I				5. Funding Numbers	
6. Author(s)					
7. Performing Organization Name(s) and Address(es) Science Applications International Corporation 1710 Goodridge Drive McLean, VA. 22101				8. Performing Organization Report number	
9. Sponsoring/Monitoring Agency Name(s) and Address(es) ANG/CEVR on Program 3500 Fetchet Avenue Andrews AFB MD 20762-5157 Air National Guard Readiness Center Andrews Air Force Base, Maryland 20331				10. Sponsoring/Monitoring Agency Report Number	
11. Supplemental Notes					
12. Distribution/Availability Statement Approved for public release; distribution is unlimited				12b. Distribution Code	
13. Abstract (maximum 200 words) Site Investigation Report for IRP Site No. 12 and 13, South Dakota Air National Guard, 114th Fighter Wing, Joe Foss Field, Sioux Falls, South Dakota, Volume I. This is the first volume of a two volume site investigation report. Two sites (Site 12 - Ramp area and Site 13 - Motor Vehicle Maintenance Facility) was investigated under the Installation Restoration Program. Soil and groundwater samples were collected and analyzed. No further action was recommended on site 13 and quarterly sampling was recommended for site 12. South Dakota Regulators have agreed to both recommendations. Decision documents will be prepared for each site.					
14. Subject Terms Installation Restoration Program; Comprehensive Environmental Response, Compensation and Liability Act (CERCLA); Air National Guard; Site Investigation, South Dakota Air National Guard; Sioux Falls, South Dakota				15. Number of Pages 200	
				16. Price Code	
17. Security Classification of Report Unclassified		18. Security Classification of this Page Unclassified		19. Security Classification of Abstract Unclassified	
				20. Limitation of Abstract None	

**AIR NATIONAL GUARD
INSTALLATION RESTORATION PROGRAM
114th FIGHTER WING
SOUTH DAKOTA AIR NATIONAL GUARD
JOE FOSS FIELD, SIOUX FALLS, SOUTH DAKOTA**

**SITE INVESTIGATION REPORT
FINAL**

Submitted to:

**Air National Guard Readiness Center
Andrews Air Force Base, Maryland 20331**

Submitted by:

**Science Applications International Corporation
1710 Goodridge Drive
McLean, Virginia 22102**

**National Guard Bureau Contract DAHA90-94-D-0007
SAIC Project No. 01-0827-04-3423-018**

February 1996

DTIC QUALITY INSPECTED 5

THIS PAGE WAS INTENTIONALLY LEFT BLANK

TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
EXECUTIVE SUMMARY	ES-1
1. INTRODUCTION	1-1
1.1 BACKGROUND	1-1
1.2 PURPOSE AND SCOPE	1-4
1.3 METHODOLOGY	1-6
2. INSTALLATION DESCRIPTION	2-1
2.1 LOCATION	2-1
2.2 ORGANIZATION AND HISTORY	2-1
2.2.1 Previous Activities	2-2
2.2.2 Background and Operational History of Site 12	2-2
2.2.3 Background and Operational History of Site 13	2-4
3. ENVIRONMENTAL SETTING	3-1
3.1 METEOROLOGY	3-1
3.2 GEOLOGY	3-3
3.2.1 Regional Geology	3-3
3.2.2 Site Geology	3-5
3.3 REGIONAL AND LOCAL HYDROLOGY	3-6
3.3.1 Regional Subsurface Hydrology	3-6
3.3.2 Site Hydrology	3-10
3.4 CRITICAL HABITATS/ENDANGERED OR THREATENED SPECIES	3-15
3.4.1 Wetlands	3-15
3.4.2 Endangered and Threatened Species	3-15
4. FIELD PROGRAM	4-1
4.1 GENERAL APPROACH	4-1
4.2 FIELD ACTIVITIES	4-2
4.2.1 Soil Organic Vapor Survey	4-2
4.2.2 Groundwater Field Screening	4-3
4.2.3 Soil Field Screening	4-3

TABLE OF CONTENTS (continued)

<u>Section</u>	<u>Page</u>
4.2.4 Groundwater Screening	4-4
4.2.5 Piezometer Installation	4-4
4.2.6 Monitoring Well Installation	4-5
4.2.7 Monitoring Well Development	4-6
4.2.8 Monitoring Well Sampling	4-6
4.3 SI PROGRAM AT SITE 12 - RAMP AREA	4-6
4.3.1 SOV Survey	4-7
4.3.2 Soil and Groundwater Screening	4-9
4.3.3 Piezometer Installation	4-9
4.3.4 Monitoring Well Installation and Sampling	4-11
4.4 SI PROGRAM AT SITE 13 - MVMF	4-11
4.4.1 SOV Survey	4-12
4.4.2 Groundwater Screening	4-12
4.4.3 Soil Screening	4-12
4.4.4 Monitoring Well Installation	4-15
4.4.5 Monitoring Well Sampling	4-15
4.5 INVESTIGATION-DERIVED WASTE HANDLING	4-15
4.6 DEVIATIONS FROM WORK PLAN	4-16
5. SITE INVESTIGATION RESULTS	5-1
5.1 SITE 12 - RAMP AREA RESULTS	5-1
5.1.1 Screening Activity Results	5-1
5.1.1.1 SOV Survey	5-1
5.1.1.2 Soil Screening	5-3
5.1.1.3 Groundwater Screening	5-3
5.1.2 Soils	5-6
5.1.3 Groundwater	5-6

TABLE OF CONTENTS
(continued)

<u>Section</u>	<u>Page</u>
5.2 SITE 13 - MVMF RESULTS	5-8
5.2.1 Screening Activity Results	5-8
5.2.1.1 SOV Survey	5-8
5.2.1.2 Soil Screening	5-8
5.2.1.3 Groundwater Screening	5-8
5.2.2 Soils	5-10
5.2.3 Groundwater	5-10
6. CONCLUSIONS	6-1
6.1 SITE 12 - RAMP AREA CONCLUSIONS	6-1
6.2 SITE 13 - MOTOR VEHICLE MAINTENANCE FACILITY CONCLUSIONS ..	6-2
7. RECOMMENDATIONS	7-1
7.1 SITE 12 - RAMP AREA RECOMMENDATIONS	7-1
7.2 SITE 13 - MOTOR VEHICLE MAINTENANCE FACILITY RECOMMENDATIONS	7-1
8. REFERENCES	8-1

APPENDICES

APPENDIX A	TARGET ENVIRONMENTAL SERVICES, INC. SITE SCREENING DATA REPORT
APPENDIX B	GEOPROBE LOGS
APPENDIX C	PIEZOMETER LOGS AND CONSTRUCTION DIAGRAMS
APPENDIX D	MONITORING WELL LOGS AND CONSTRUCTION DIAGRAMS
APPENDIX E	ANALYTICAL REPORTS
APPENDIX F	CHAIN OF CUSTODY FORMS
APPENDIX G	SI DATA REQUIREMENTS FOR FEDERAL FACILITY DOCKET SITES
APPENDIX H	INVESTIGATION DERIVED WASTE MANAGEMENT
APPENDIX I	DATA QUALITY ASSESSMENT
APPENDIX J	GEOTECHNICAL DATA
APPENDIX K	FIELD SAMPLING FORMS
APPENDIX L	FIELD LOGBOOK
APPENDIX M	FIELD CHANGE ORDER

LIST OF TABLES

<u>Table</u>	<u>Page</u>
2-1 History of Base Operations, South Dakota Air National Guard, Sioux Falls, South Dakota	2-3
3-1 Summary of Sioux Falls, South Dakota Municipal Water Supply Well Data (1994)	3-11
3-2 Characteristics of the Big Sioux Aquifer in the Vicinity of SDANG, Joe Foss Field, Sioux Falls, South Dakota	3-13
3-3 Descriptions of Wetland Designations for Sioux Falls, South Dakota Area	3-15
3-4 Endangered Species Summary for the Greater Sioux Falls, South Dakota Area	3-18
5-1 Site 12 Soil Organic Vapor Survey Summary of Results	5-4
5-2 Site 12 Soil Field Screening Summary of Results	5-3
5-3 Site 12 Soil Summary of Results	5-6
5-4 Site 12 Groundwater Summary of Results	5-8
5-5 Site 13 Groundwater Field Screening Summary of Results	5-10

LIST OF FIGURES

<u>Figure</u>	<u>Page</u>
ES-1 Location of Joe Foss Airfield	ES-2
ES-2 Location of SDANG within Joe Foss Airfield and Sites 1 and 3	ES-3
ES-3 Location of Sites 12 and 13, and Sites 8, 9, 10, and 11	ES-4
1-1 Location of Joe Foss Airfield	1-2
1-2 Location of SDANG within Joe Foss Airfield and Sites 1 and 3	1-3
1-3 Location of Sites 12 and 13, and Sites 8, 9, 10, and 11	1-5
2-1 Location of Areas 1 and 2 within Site 12	2-5
2-2 Location of Site 13	2-6
3-1 Topography of SDANG and Vicinity	3-2
3-2 Generalized Hydrogeologic Conceptual Model of the Coteau des Prairies	3-4
3-3 Soil Types of SDANG and Vicinity	3-7
3-4 The Big Sioux Aquifer at SDANG and Vicinity	3-8
3-5 Hydrograph of Selected Municipal Wells	3-14
3-6 Groundwater Levels in Piezometers at Site 12 on 13 July 1995	3-16
3-7 Wetlands in the SDANG Area	3-17
4-1 Field Screening Sampling Points at Site 12	4-8
4-2 Sampling Points at Site 12	4-10
4-3 Field Screening Sampling Points at Site 13	4-13
4-4 Sampling Points at Site 13	4-14

LIST OF FIGURES
(continued)

<u>Figure</u>		<u>Page</u>
5-1	Summary of Site 12 Soil Gas Field Screening Results	5-2
5-2	Summary of Site 12 Soil Field Screening Results	5-5
5-3	Summary of Site 12 Soil and Groundwater Results	5-7
5-4	Summary of Site 13 Groundwater Field Screening Results	5-9

LIST OF ACRONYMS AND ABBREVIATIONS

ANG	Air National Guard
ANG	Air National Guard
BLS	Below Land Surface
BTEX	Benzene, Toluene, Ethylbenzene, and Xylenes
CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
ENR	Environment and Natural Resources
DERP	Defense Environmental Restoration Program
DOD	U.S. Department of Defense
DOI	U.S. Department of Interior
EPA	U.S. Environmental Protection Agency
ETS	Extraction and Treatment System
gal/day/ft	gallons per day per foot
GC	Gas Chromatography
HMTC	Hazardous Materials Technical Center
ID	Inside Diameter
IDW	Investigation-derived Waste
IRP	Installation Restoration Program
MDL	Method Detection Limit
MVMF	Motor Vehicle Maintenance Facility
msl	Mean Sea Level
$\mu\text{g/L-v}$	micrograms per liter-volume
NGB	National Guard Bureau
NOAA	National Oceanic and Atmospheric Administration
NPDES	National Pollutant Discharge Elimination System
NWI	National Wetlands Inventory
PA	Preliminary Assessment
PARCC	Precision, Accuracy, Representativeness, Comparability, and Completeness
PVC	Polyvinyl Chloride

LIST OF ACRONYMS AND ABBREVIATIONS
(continued)

PID	Photoionization Detector
QA	Quality Assurance
QAPP	Quality Assurance Project Plan
QC	Quality Control
RI	Remedial Investigation
SAIC	Science Applications International Corporation
SARA	Superfund Amendments and Reauthorization Act
SDANG	South Dakota Air National Guard
SI	Site Investigation
SOV	Soil Organic Vapor
TPH	Total Petroleum Hydrocarbons
USFWS	U.S. Fish and Wildlife Service
UST	Underground Storage Tank
VOA	Volatile Organic Analysis
VOC	Volatile Organic Compound

THIS PAGE WAS INTENTIONALLY LEFT BLANK

EXECUTIVE SUMMARY

This report documents the Site Investigation (SI) activities conducted at Site 12 - Ramp Area and Site 13 - Motor Vehicle Maintenance Facility (MVMF) of the South Dakota Air National Guard (SDANG), Joe Foss Field, Sioux Falls, South Dakota, for the Air National Guard Readiness Center (ANG). Figure ES-1 shows the location of Joe Foss Field.

INTRODUCTION

The SDANG facilities occupy 166 acres in the southern portion of Joe Foss Field, the municipal airport for Sioux Falls, as shown in Figure ES-2. The Ramp Area (Site 12) and the MVMF (Site 13) are located within the SDANG facilities, as Figure ES-3 shows. The Ramp Area is used for refueling, taxiing, and parking aircraft. During routine repairs to the ramp in 1993, fuel-contaminated soils were discovered underneath parts of the ramp. Approximately 1,542 tons of petroleum-contaminated soil have been removed from the contaminated areas. The MVMF was constructed in 1976 and consists of an automotive maintenance shop (Building 11) and a fuel dispensing station near the building. Three 2,000-gallon above-ground fuel tanks and buried lines from the tanks to the dispensing pumps are located at Site 13. The fuel lines were tested for leaks in 1993 and 1994, and no leaks were detected during either test. Soil contamination was observed when concrete warning posts were being installed around the fuel dispensing island in July 1994.

FIELD PROGRAM

The objective of this SI was to confirm the presence or absence of petroleum and/or solvent contamination in subsurface soils and groundwater at Sites 12 and 13. The field activities conducted during the SI consisted of:

- A soil organic vapor (SOV, or "soil gas") survey
- Sampling soils and groundwater using a hydraulic probe
- Screening soil and groundwater samples for volatile organic compounds (VOCs), including benzene, toluene, ethylbenzene, and xylenes (BTEX), total petroleum hydrocarbons (TPH), and eight organic solvents (Site 13 only) in the field

NAME: S:\SDAKOTA\LOC\JOEF2.DWG DATE: SEP 06, 1995 TIME: 2:26 PM

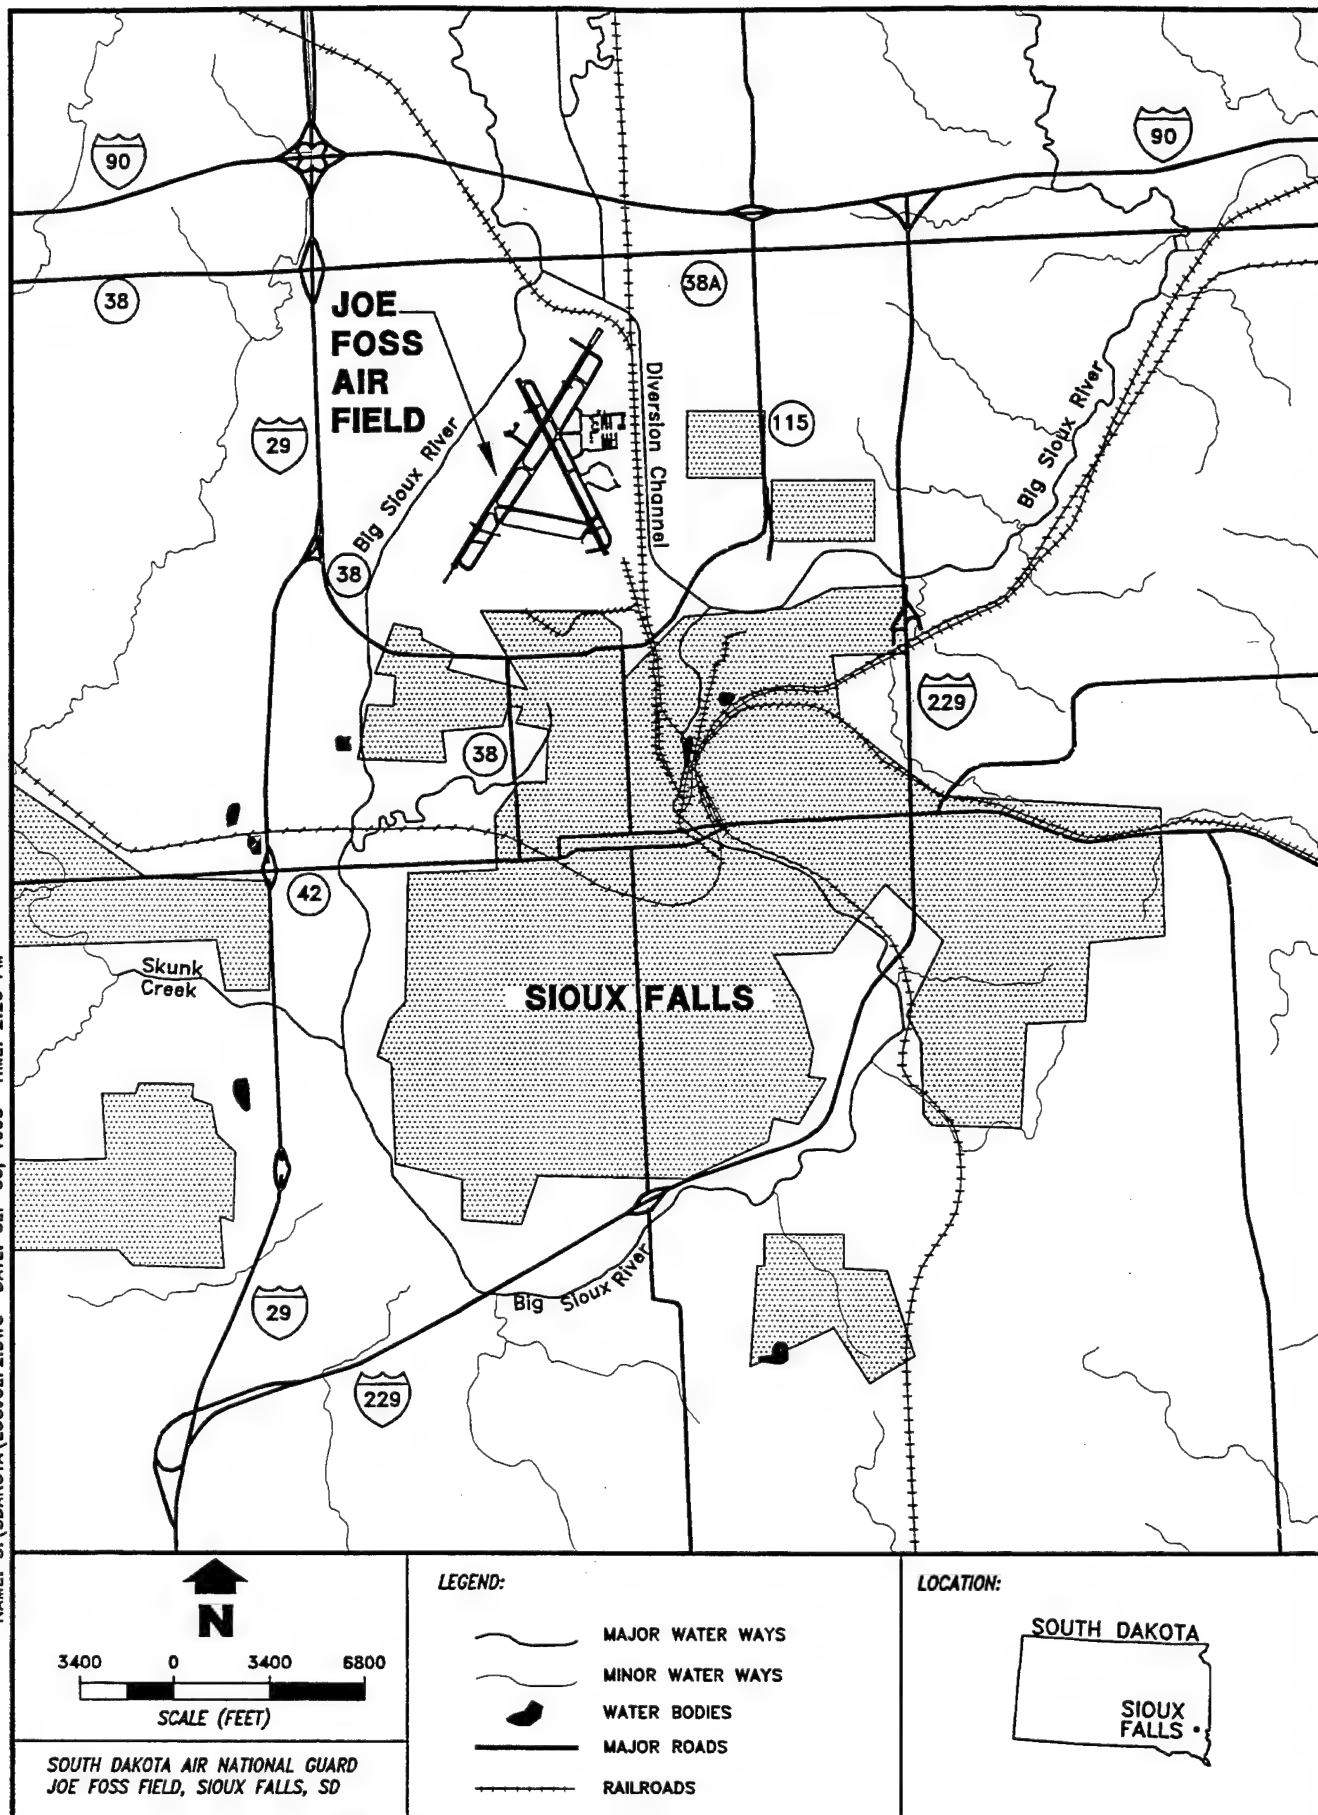


Figure ES-1. Location of Joe Foss Airfield

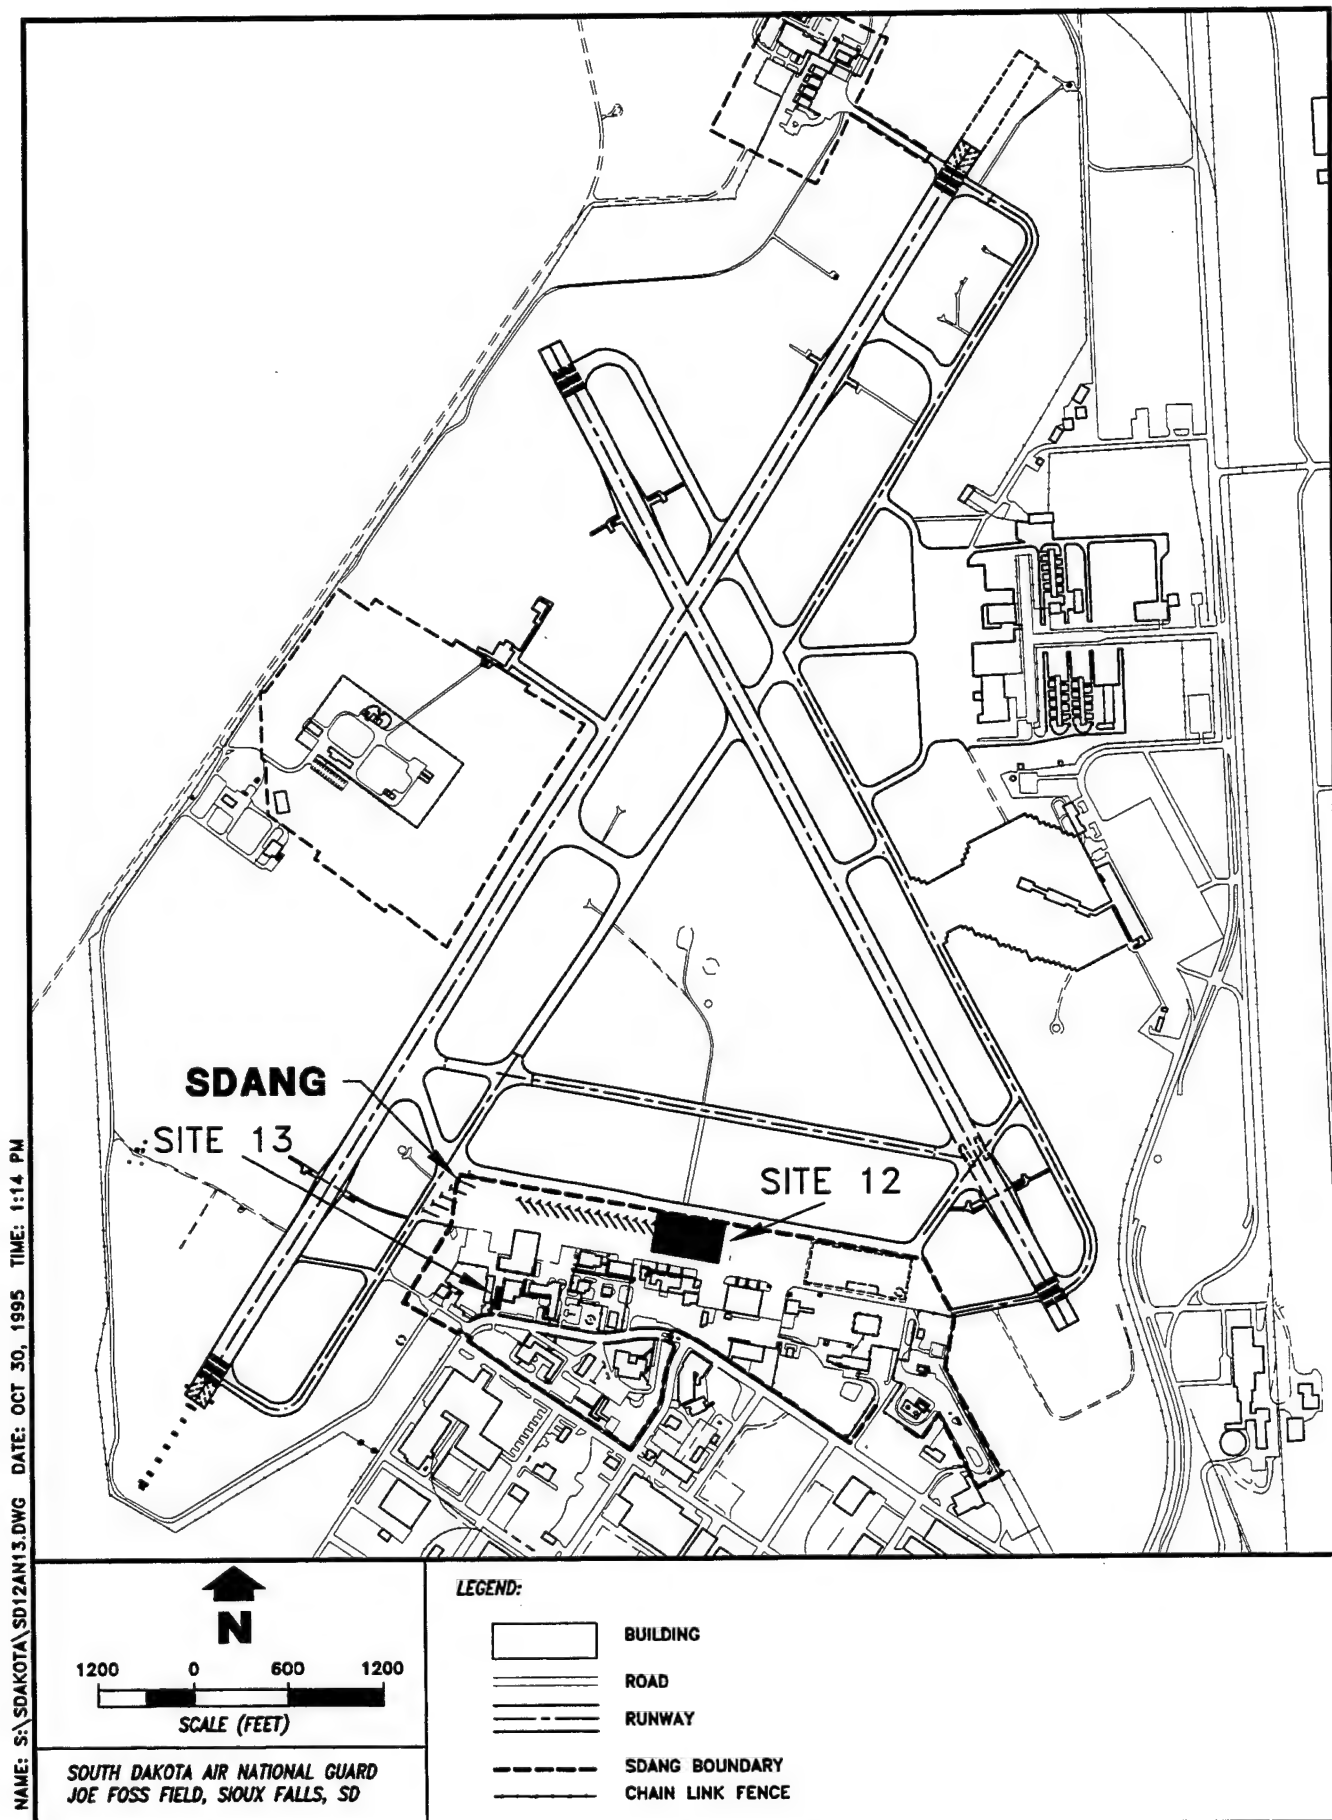


Figure ES-2. Location of SDANG within Joe Foss Airfield and Sites 1 and 3

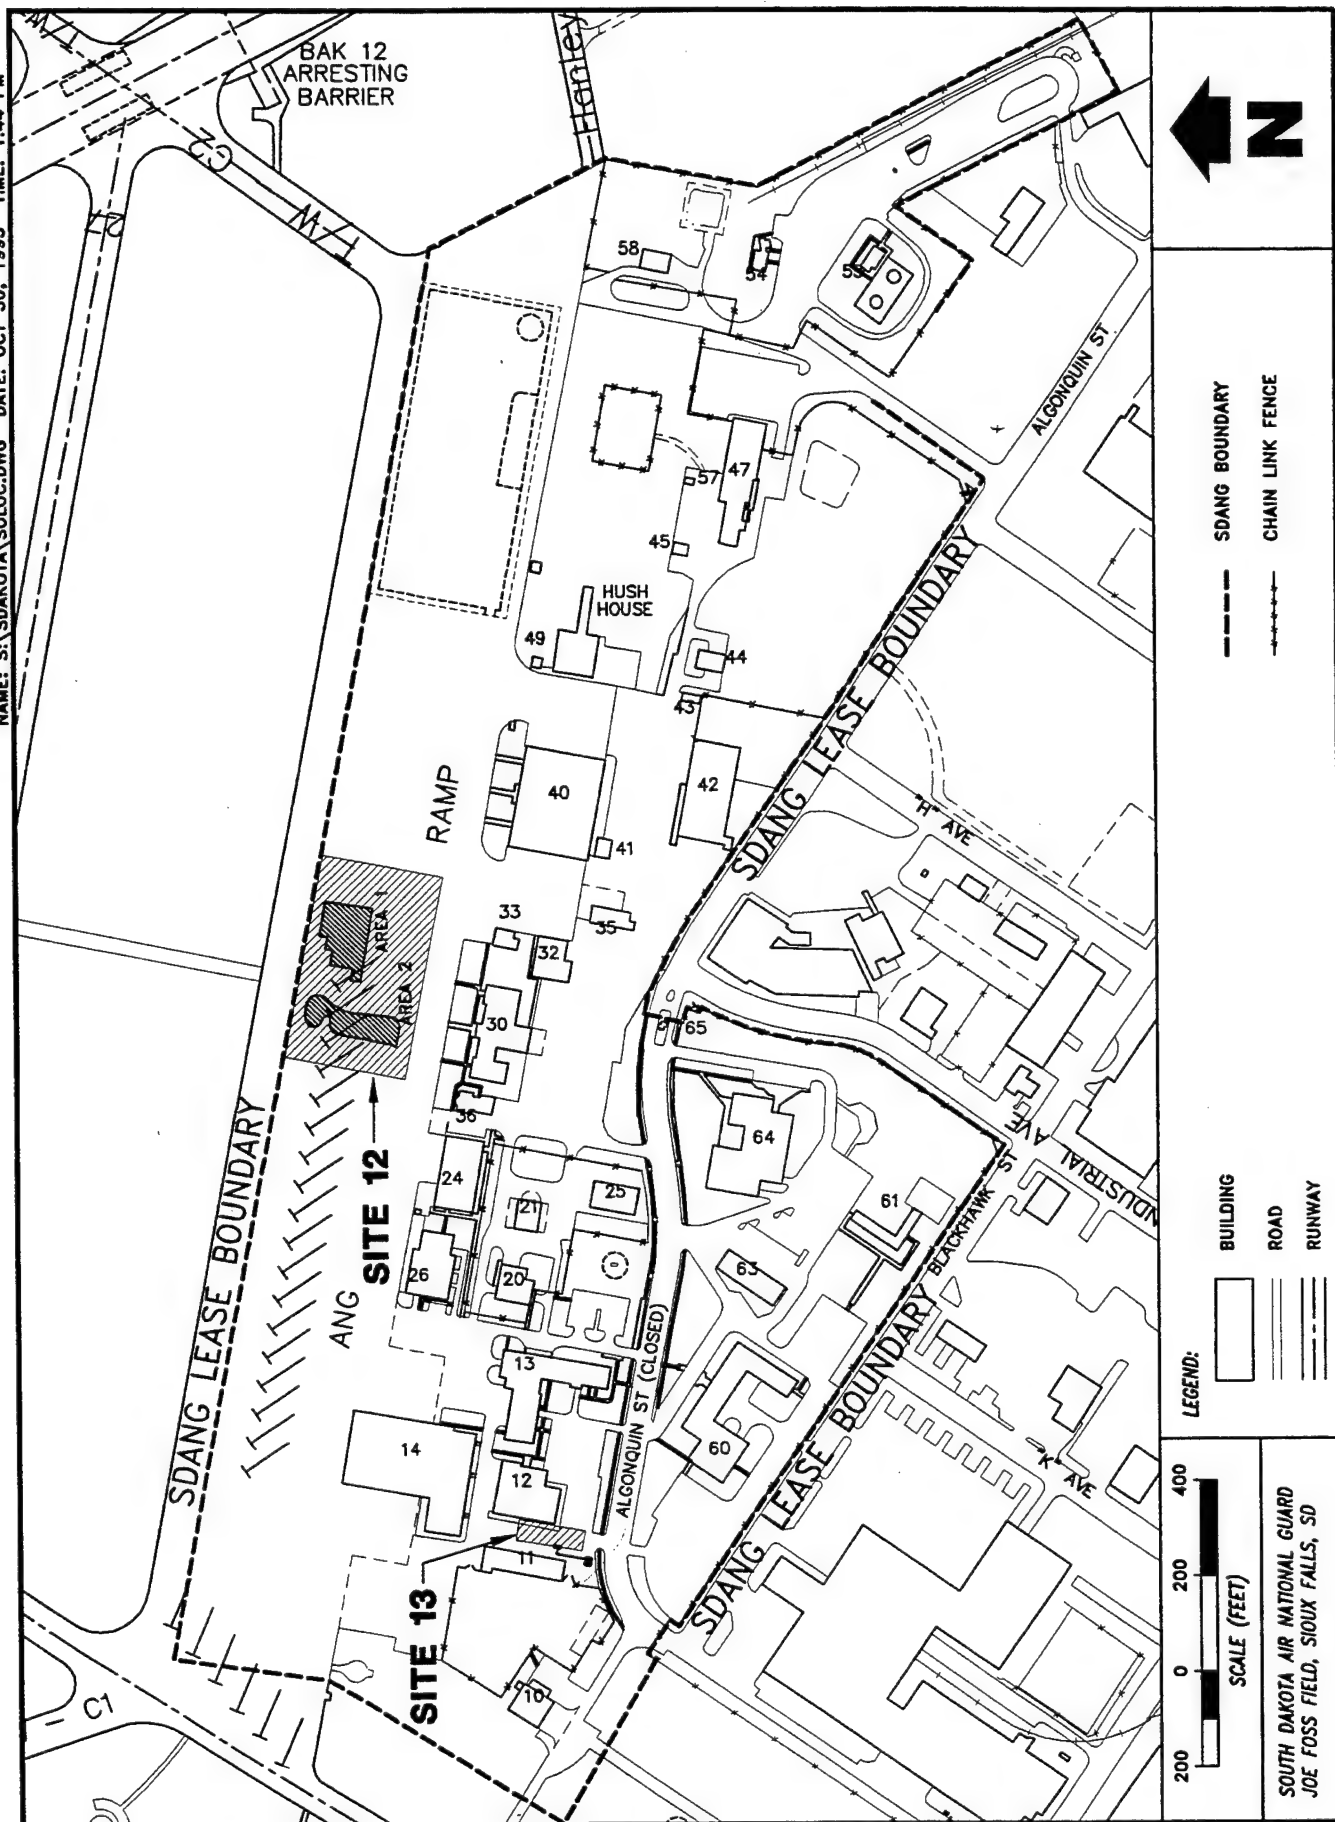


Figure ES-3. Location of Sites 12 and 13, and Sites 8, 9, 10, and 11

- Laboratory analysis of soil and groundwater for BTEX and TPH at both Sites 12 and 13 and for eight organic solvents at Site 13
- Installing six groundwater monitoring wells and three piezometers to monitor water quality and assess groundwater flow direction.

SITE INVESTIGATION RESULTS

Isolated low-level soil contamination was detected during the screening of soil gas and soil samples at Site 12 - Ramp Area. TPH was detected in both soil gas and soil samples at three locations. Two of these locations are east of Area 1. The third location is the northwest corner of Site 12. The maximum concentration of TPH in soils was 10 mg/kg (10 parts per million [ppm]). Ethylbenzene and xylenes were detected in soil gas at two depth intervals at a sampling location east of Area 1. These compounds were not detected in soil samples.

Groundwater samples from five monitoring wells were analyzed for TPH and BTEX. TPH was detected at 81 $\mu\text{g/L}$ in MW12-1. This well was drilled at a soil gas/soil sampling and groundwater screening point where TPH was present above detection limits, east of Area 1. No other compounds were detected in groundwater.

BTEX, TPH, and solvents were not detected in soil and soil gas samples screened at Site 13 - MVMF. Low-level contamination from BTEX, TPH, and solvents was detected immediately around the pump island. BTEX compounds were identified at three locations east, north, and west of the pump island. BTEX, TPH, or solvents were not detected in groundwater in the monitoring well installed at Site 13.

CONCLUSIONS AND RECOMMENDATIONS

Site 12 - Ramp Area—BTEX and TPH were detected in soil gas samples collected immediately east of Area 1. The highest concentrations of soil vapors were detected around a single point east of Area 1. The soil gas detections seem to be most areally extensive in the 6- to 8-foot sampling interval (approximately 9,000 square feet).

TPH was detected in low concentrations in soil samples at two out of five sampling locations during field screening. During laboratory analysis of soils for BTEX and TPH, TPH was present above detection limits at one location. This sampling point coincides with the SOV point showing the maximum concentrations in soil gas.

TPH was detected during groundwater screening by the offsite laboratory at the point where maximum concentrations of soil gas were detected. BTEX compounds were not detected during the groundwater screening. During groundwater analysis of the five monitoring wells, TPH was detected in low concentrations at the well location coinciding with the SOV point previously mentioned.

These findings indicate that isolated areas of soil and groundwater contamination are present at Site 12. TPH contamination in soils may be impacting groundwater quality at Site 12 east of Area 1. TPH was detected in one monitoring well; however, the groundwater results do not indicate TPH migration. Isolated soil and groundwater contamination occur at levels below South Dakota Department of Environment and Natural Resources (DENR) cleanup standards and maximum contaminant levels (MCLs), respectively. One groundwater sample contained TPH in excess of the South Dakota standard for TPH in wellhead protection areas.

Based upon these findings, it is recommended that groundwater monitoring at Site 12 continue under a quarterly monitoring program. Continued monitoring will expand the data set for groundwater at Site 12, allowing ANGRC to determine temporal and spatial variations in TPH concentrations. The data should allow ANGRC to evaluate whether soil contamination east of Area 1 sufficiently impacts groundwater to warrant further study.

Site 13 - Motor Vehicle Maintenance Facility—BTEX, TPH, or solvents were not detected during the SOV survey or onsite soil screening at Site 13. Soils at four locations within Site 13 were analyzed in the laboratory and BTEX, TPH, or solvents were not detected.

BTEX compounds were detected in low concentrations at three groundwater screening locations in the immediate area of the pump island. TPH and solvents were not present above

detection limits. BTEX, TPH, and solvents were not present above detection limits during groundwater analysis of monitoring well GW13-1, located downgradient from the screening samples.

The Site 13 SI data indicate that isolated soil and groundwater contamination occur at levels below the South Dakota DENR cleanup standards and MCLs, respectively. Therefore, no further action is recommended for this site. A decision document recommending no further action should be prepared for Site 13.

THIS PAGE WAS INTENTIONALLY LEFT BLANK

1. INTRODUCTION

This report documents the Site Investigation (SI) activities conducted at Site 12 - Ramp Area and Site 13 - Motor Vehicle Maintenance Facility (MVMF) of the South Dakota Air National Guard (SDANG), Joe Foss Field, Sioux Falls, South Dakota, for the Air National Guard Readiness Center (ANG). The SI activities were completed under National Guard Bureau (NGB) Contract No. DAHA90-94-D-0007. The SI field activities were conducted in June and July 1995 by Science Applications International Corporation (SAIC) and were accomplished in accordance with the SI Work Plan (SAIC 1995). The following sections present background information, the purpose and scope of the SI, and the methodology used for the investigation.

1.1 BACKGROUND

The Environmental Restoration Program (ERP) was established in 1984 to promote and coordinate efforts for the evaluation and cleanup of contamination at U.S. Department of Defense (DOD) installations. On January 23, 1987, Presidential Executive Order 12580 was issued, which assigned responsibility to the Secretary of Defense for carrying out ERP within the overall framework of the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) and the Superfund Amendments and Reauthorization Act (SARA). The Installation Restoration Program (IRP) was established under ERP to identify, investigate, and clean up contamination at DOD installations. The IRP is focused on cleanup of contamination associated with past DOD activities to ensure that risks to public health are eliminated and to restore natural resources for future use. ANG manages the IRP and related activities.

SDANG is located at Joe Foss Field, the municipal airport in Sioux Falls, in southeast South Dakota, as shown in Figure 1-1. SDANG was established in 1946 to provide air combat preparedness. The facilities at SDANG, including aircraft hangers, administrative buildings, and vehicle maintenance facilities, occupy 166 acres on the southern edge of Joe Foss Field, as shown in Figure 1-2. Joe Foss Field sits on the floodplain between the Big Sioux River and engineered diversion channels.

NAME: S:\SDAKOTA\LOCJOEF2.DWG DATE: SEP 06, 1995 TIME: 2:26 PM

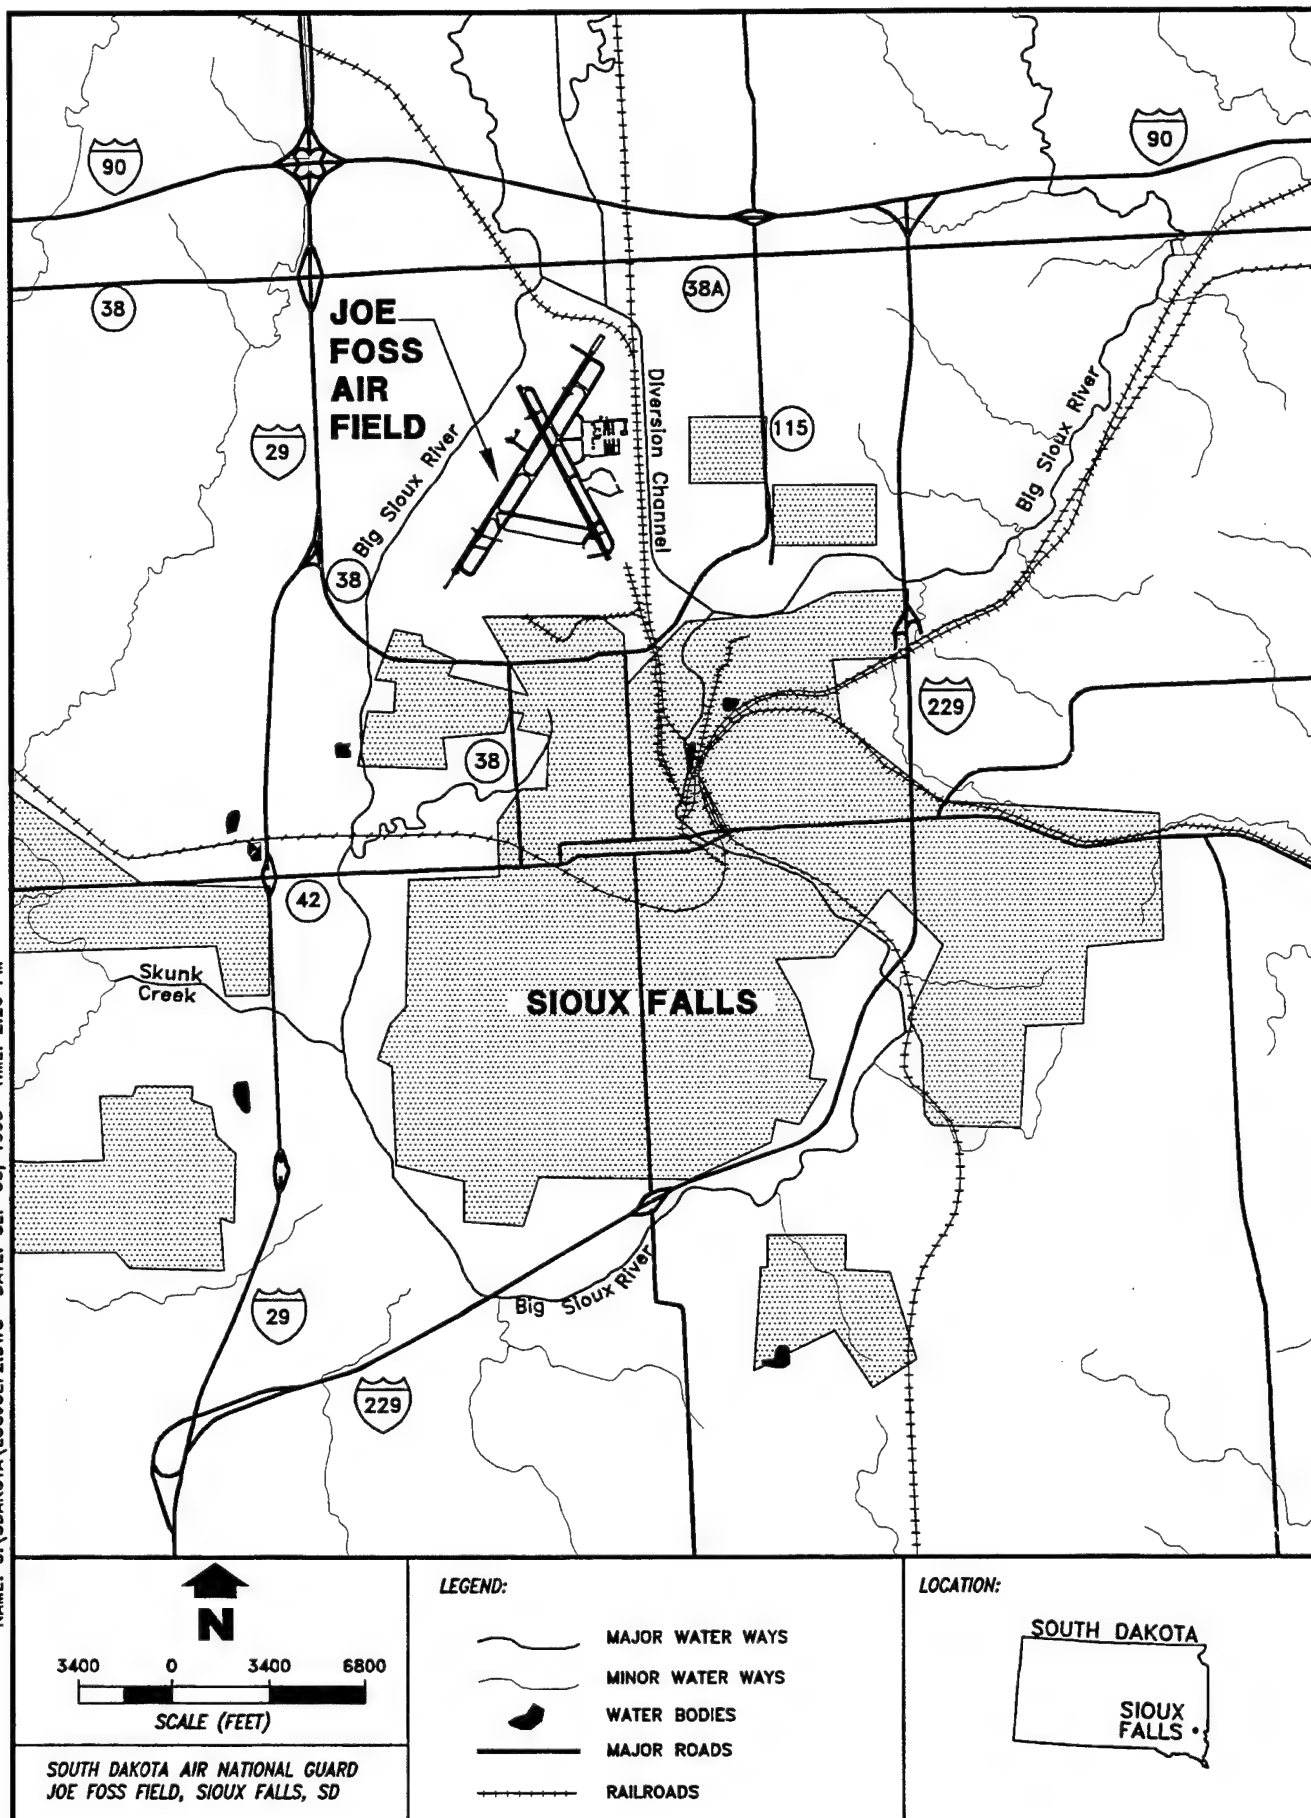


Figure 1-1. Location of Joe Foss Airfield

NAME: S:\SDAKOTA\SD12AN13.DWG DATE: OCT 30, 1995 TIME: 1:14 PM

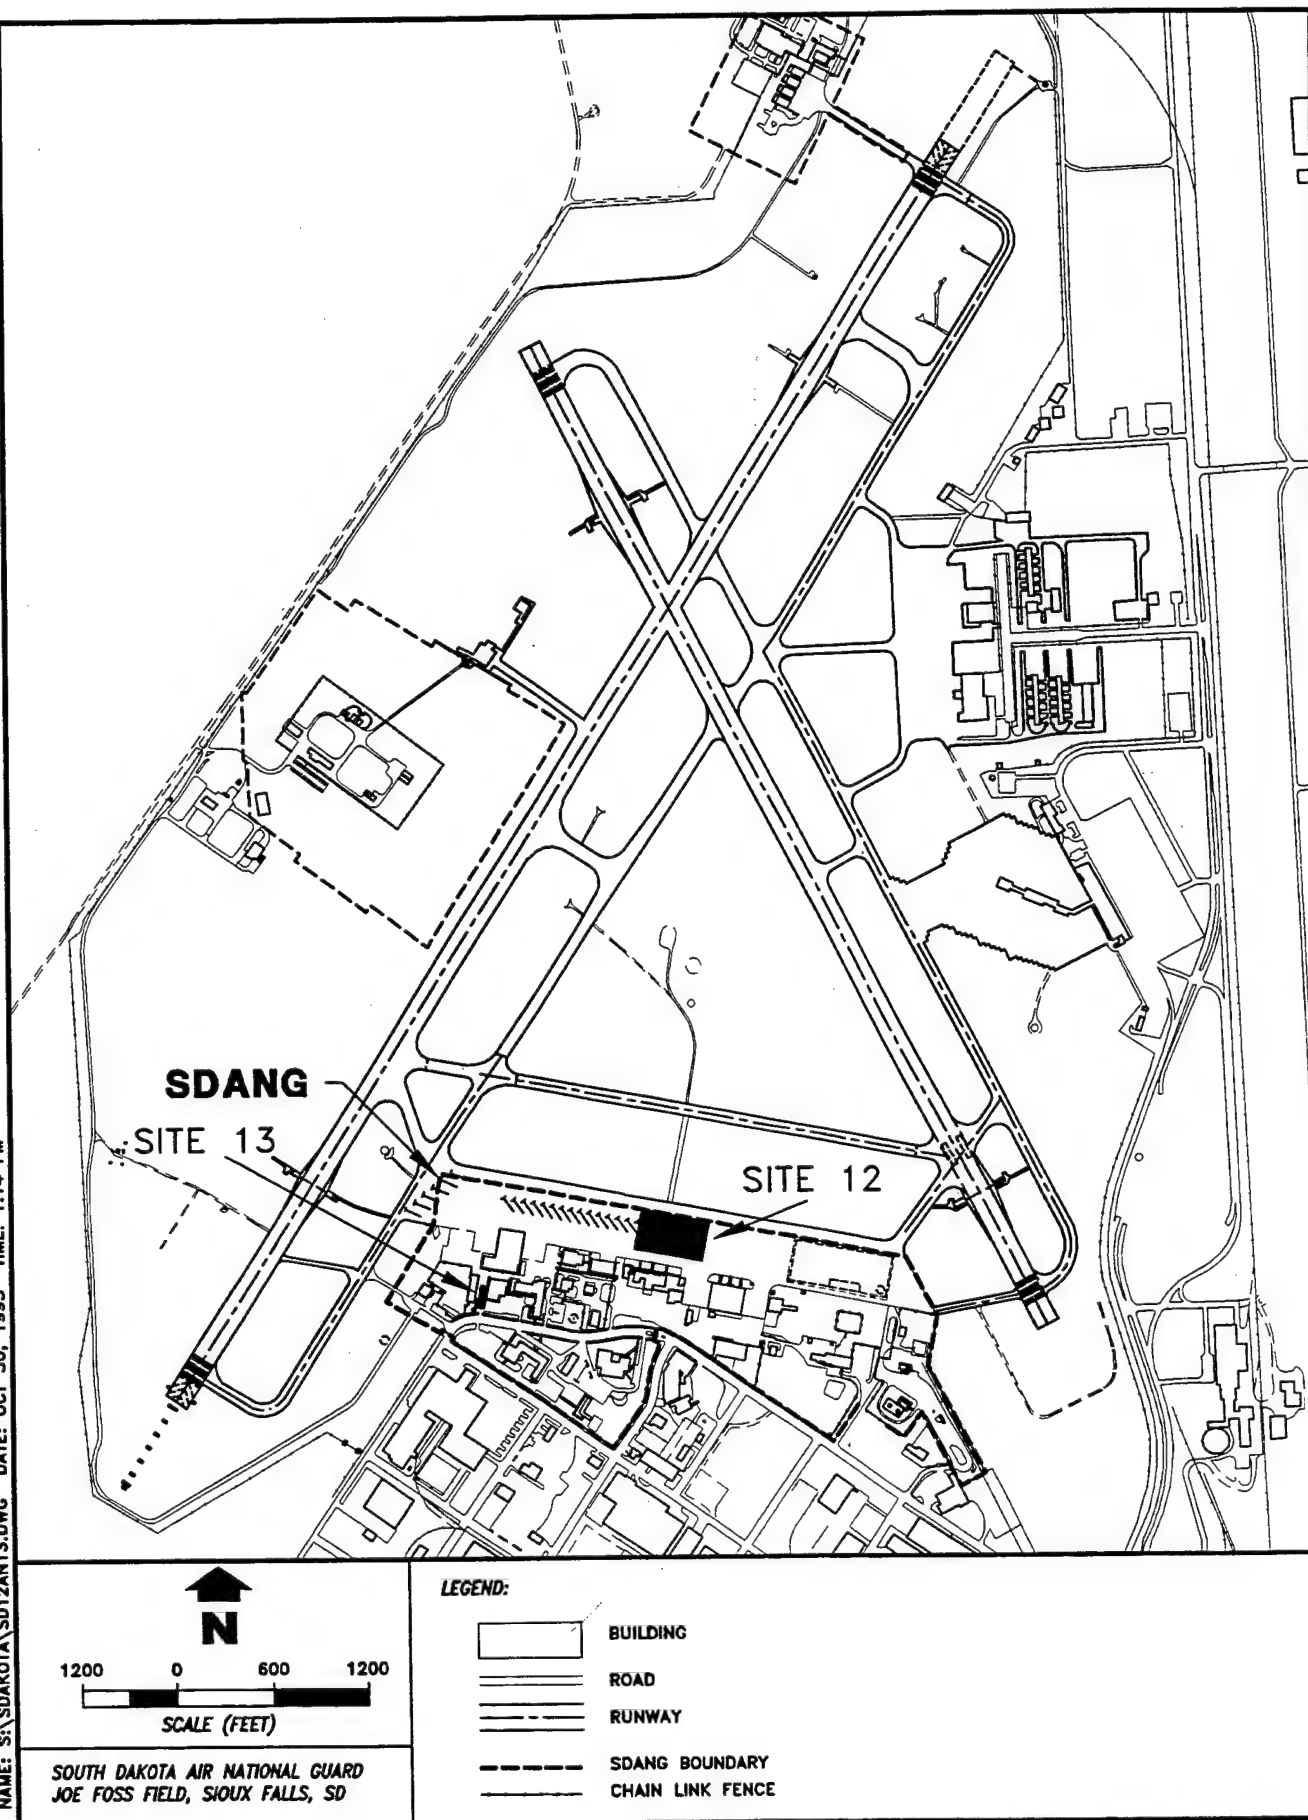


Figure 1-2. Location of SDANG within Joe Foss Airfield and Sites 1 and 3

A Preliminary Assessment (PA) of SDANG was conducted by the Hazardous Materials Technical Center (HMTc) in 1986 to identify areas that required further study. Previous investigations of SDANG have included site investigations of areas southeast and northwest of Sites 12 and 13; Remedial Investigations (RIs) of Site 1 - Underground Fuel Storage Area and Site 3 - Base Fire Training Area (Figure 1-2), resulting in the installation of an extraction and treatment system (ETS) to remove volatile organic compounds (VOCs) at Site 1 and soil at Site 3; and underground storage tank (UST) removal at Sites 8, 9, 10, and 11 (Figure 1-3).

Soil contamination at Site 12 - Ramp Area was first observed in 1993 during routine ramp repair. Soil contamination at Site 13 - MVMF was first observed in 1994 when posts were being installed around the fuel dispensing island. Observations made when the contamination was discovered were odors indicative of petroleum fuel.

1.2 PURPOSE AND SCOPE

The objective of the SI conducted at Sites 12 and 13 was to confirm the presence or absence of petroleum and/or solvent contamination in subsurface soils and groundwater at the two sites. This report presents the approach to the SI field investigation, describes the field screening and laboratory analytical results, and makes recommendations for future action at the sites.

The scope of work for the SI included a soil organic vapor (SOV) survey, subsurface soil and groundwater sampling using a hydraulic probe, installation of piezometers and monitoring wells, and two rounds of monitoring well sampling. All work was conducted in accordance with Federal, state, and local regulations, and followed site-specific sampling and health and safety protocols, as specified in the SI Work Plan (SAIC 1995). Laboratory chemical analyses were conducted in accordance with project quality assurance/quality control (QA/QC) requirements as presented in the Quality Assurance Project Plan (QAPP) (Appendix A of the SI Work Plan).

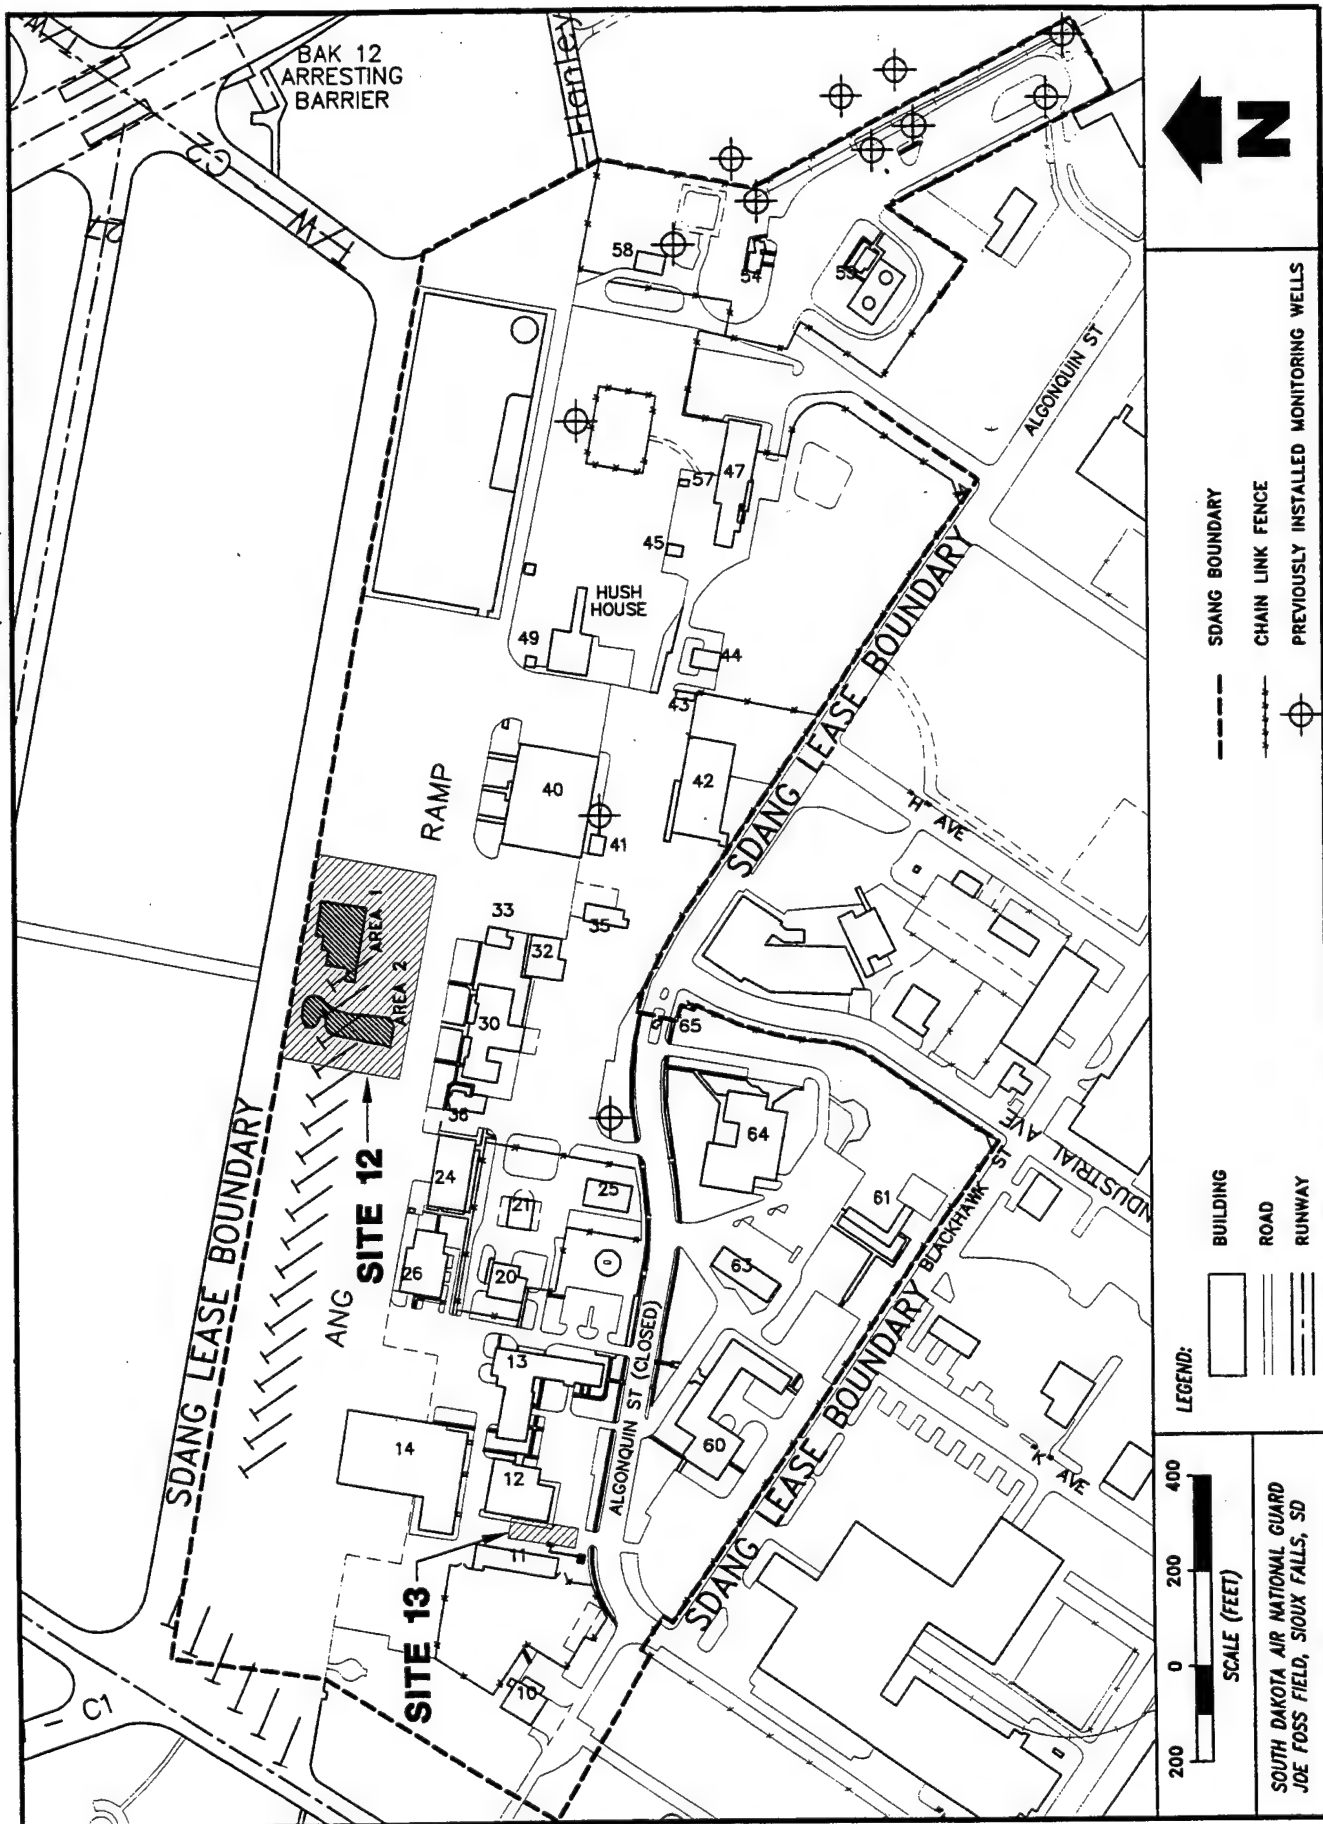


Figure 1-3. Location of Sites 12 and 13, and Sites 8, 9, 10, and 11

The report is organized into the following sections. Section 2 describes the location, organization, and history of the SDANG facility. This includes the results of the PA conducted at SDANG (HMTTC 1986) as well as information concerning specific activities associated with Sites 12 and 13. Section 3 describes the geologic, hydrogeologic, climatic, and ecologic setting of the study area, including specific information obtained during the SI at Sites 12 and 13. Section 4 discusses the approach and procedures used during the SI field investigation, and includes information on the SOV survey, hydraulic probe sampling, and piezometer and well installation. Section 5 evaluates the field screening and laboratory analytical results for Sites 12 and 13, and summarizes the extent of soil and groundwater contamination. In Section 6, conclusions are made for each site, and recommendations for future action at each site are outlined in Section 7 based on these conclusions. The data generated for the SI are presented in the appendices, including boring logs and construction diagrams for the monitoring wells installed. The *Data Requirements for Federal Facility Docket Sites*, which enables the U.S. Environmental Protection Agency (EPA) to perform hazard ranking, is included in Appendix G.

1.3 METHODOLOGY

The following methodology was adopted to minimize the number of soil borings and monitoring wells to be installed in order to confirm the presence or absence of contamination in soil and groundwater at Sites 12 and 13. Section 4 contains specific information on investigative methods and equipment.

An SOV survey was conducted at both Sites 12 and 13. The SOV survey was used to estimate the extent of subsurface soil contamination, and to determine optimum locations for hydraulic probe sampling and monitoring wells. During the SOV survey, soils were screened for VOCs and total petroleum hydrocarbons (TPH). During the hydraulic probe survey of Site 12, groundwater screening for VOCs and TPH was conducted to characterize the groundwater quality beneath the site.

Groundwater samples were collected using the hydraulic probe at Sites 12 and 13, and from six monitoring wells. Groundwater sampling locations, including piezometer and monitoring well locations, were chosen by the ANGRC hydrogeologist and SAIC, with

concurrence from the South Dakota Department of Environment and Natural Resources (DENR). Monitoring well samples were collected to characterize groundwater quality at Sites 12 and 13. These samples were analyzed for TPH and benzene, toluene, ethylbenzene, and xylenes (BTEX); at Site 13, samples also were analyzed for eight organic solvents (vinyl chloride, chloroform, 1,1,1-trichloroethane, trichloroethene, 1,2-dichloroethene, tetrachloroethene, and carbon tetrachloride).

Subsurface soil samples were collected using the hydraulic probe to characterize soil contamination. Subsurface soil samples from depths of 0 to 9 feet were analyzed for TPH and BTEX at Site 12; at Site 13, samples also were analyzed for solvents. Subsurface soil samples were collected during monitoring well installation to further characterize the geology of the subsurface materials. One sample was collected from each monitoring well boring for laboratory geotechnical testing (maximum depth of 15 feet).

THIS PAGE WAS INTENTIONALLY LEFT BLANK

2. INSTALLATION DESCRIPTION

This section describes the location of the South Dakota Air National Guard (SDANG), including the locations of Site 12 - Ramp Area and Site 13 - Motor Vehicle Maintenance Facility (MVMF). The organization and history of SDANG is summarized, and individual histories of Sites 12 and 13 are provided.

2.1 LOCATION

Joe Foss Field is the municipal airport for Sioux Falls, South Dakota. The airfield is located within the city limits of Sioux Falls and is 2 miles north of the downtown area (Figure 1-1). The SDANG facilities occupy 166 acres in the southern portion of Joe Foss Field and contain hangers for aircraft parking and repairs, and buildings for administration and vehicle maintenance (Figure 1-2).

Both Sites 12 and 13 are located within the SDANG facilities. Site 12 - Ramp Area is located north of Building 30 and in the north-central portion of SDANG. Site 13 - MVMF consists of Building 11 and a fuel dispensing station located east of Building 11 in the western portion of SDANG (Figure 1-3).

2.2 ORGANIZATION AND HISTORY

The 114th Fighter Wing of SDANG shares the airfield with civilian aviation. The property has been leased by the Air National Guard (ANG) from the city of Sioux Falls since 1946. The municipal airport at Sioux Falls was built in 1935 by the Works Progress Administration. On July 6, 1942, the U.S. Army opened the Sioux Falls Radio Technical School at the airport on land acquired from the city of Sioux Falls. The training school officially closed on May 31, 1945, and became the Sioux Falls Army Airfield on June 1, 1945. On December 31, 1945, the Sioux Falls Army Airfield was deactivated and the property was reverted to the city of Sioux Falls. SDANG was established at the Sioux Falls Municipal Airport on September 20, 1946.

In support of its primary mission of providing air combat preparedness, the Base has stored and used various types of hazardous materials, such as fuel and oil, during its history. Although some historical operations at SDANG have resulted in the storage and use of hazardous materials, not all of these operations relate to Installation Restoration Program (IRP) sites. Table 2-1 summarizes the operations conducted at the Base, and the hazardous substance activities associated with these operations.

2.2.1 Previous Activities

A Preliminary Assessment (PA) was conducted at SDANG by the Hazardous Materials Technical Center (HMTTC) in 1986. The PA identified the following two sites for further study: Site 1 - Underground Fuel Storage Area and Site 3 - Base Fire Training Area. Remedial Investigations (RIs) of Sites 1 and 3 were completed by Science Applications International Corporation (SAIC) in July 1989 (SAIC 1990). Both investigations resulted in remedial actions. At Site 1, a treatment system was installed. Soils were excavated and transported to a landfill at both Sites 1 and 3. In November 1993, the operation of the treatment system at Site 1 was discontinued because the influent to the treatment system met the National Pollutant Discharge Elimination System (NPDES) criteria for total petroleum hydrocarbons (TPH) and benzene, toluene, ethylbenzene, and xylenes (BTEX). The South Dakota Department of Environment and Natural Resources (DENR) requires no further soil excavation at Sites 1 and 3, and no additional groundwater monitoring at Site 3 (DENR 1993).

Because of the geographic distance of Sites 1 and 3 from Sites 12 and 13, and the closure of the sites by the South Dakota DENR, a detailed review of the remedial activities and the supporting data from these activities is not included in this Site Investigation (SI) report.

Underground storage tanks (USTs) and any associated contaminated soils have been removed from Sites 8, 9, 10, and 11 (Figure 1-3).

2.2.2 Background and Operational History of Site 12

Site 12 - Ramp Area is used for refueling, taxiing, and parking aircraft. Site 12 is part of a larger aircraft parking apron and taxiway at SDANG. SDANG initiated a ramp repair

**Table 2-1. History of Base Operations
South Dakota Air National Guard, Sioux Falls, South Dakota**

Period	Type of Operations	Mission/ Weapon Systems	Hazardous Substance Activity
1942-1945	Sioux Falls Radio Technical School (U.S. Army)	Radio training of Army personnel	Fuel/oil storage, weapons storage, machine shop operations
1946-1954	175th Fighter Squadron	P-51 Mustang, C-47, A-26, AT-6, and L-5 aircrafts	Fuel/oil storage, weapons storage, machine shop operations, fire training
1954-1956	175th Fighter Squadron	F-94 A/B Starfire aircrafts	Fuel/oil storage, weapons storage, machine shop operations, fire training, drum storage
1956-1958	114th Fighter Interceptor Group	F-94C Starfire aircrafts	Fuel/oil storage, weapons storage, machine shop operations, fire training, drum storage
1958-1962	114th Fighter Group	F-89J aircrafts	Fuel/oil storage, weapons storage, machine shop operations, fire training
1962-1970	114th Fighter Group	F-102 aircrafts	Fuel/oil storage, weapons storage, machine shop operations, fire training
1970-1977	114th Tactical Fighter Group	F-100D aircrafts	Fuel/oil storage, weapons storage, machine shop operations, fire training
1977-1991	114th Tactical Fighter Group	A-7D aircrafts	Fuel/oil storage, weapons storage, machine shop operations, fire training
1991-present	114th Fighter Group	F-16 aircrafts	Fuel/oil storage, weapons storage, machine shop operations, fire training

Source: SAIC 1995

project in 1993, consisting of removing selected areas of the existing concrete parking apron and taxiway, preparing the subgrade, installing an underdrain system, and replacing the concrete pavement. Following removal of the existing concrete pavement, construction personnel noted petroleum odors in two areas (designated Areas 1 and 2). The location of these areas in relation to existing structures is illustrated in Figure 2-1. Area 1 is located north of Building 30 and Area 2 is located west of Area 1. Soil contamination was observed along the expansion joints using a photoionization detector (PID). Soils were excavated to a depth of 8 feet below land surface (BLS) at Area 1 and 3 feet BLS at Area 2. The excavation depth was determined based on field screening of soil samples for organic vapors using two PIDs. At both Areas 1 and 2, the soil contamination was localized and varied with depth (e.g., Area 2 PID data indicated contamination at ½ foot depth (375 ppm) and no contamination at depths of 1, 2, and 3 feet BLS). At Area 1, organic vapor concentrations at a depth of 8 feet BLS ranged from nondetect (ND) to a maximum of 353 ppm (Geotek 1993). Approximately 1,524 tons of petroleum-contaminated soils were removed and transported to the Runge Landfill in Sioux Falls, South Dakota.

2.2.3 Background and Operational History of Site 13

Site 13 - MVMF was constructed in 1976 and consists of an Automotive Maintenance Shop (Building 11) and a fuel dispensing station located east of Building 11, as shown in Figure 2-2. The facility consists of three 2,000-gallon above-ground fuel storage tanks, which are located south of Building 11. The buried fuel lines from the tanks to the dispensing pumps were tested for leaks in May 1993 and August 1994. On both occasions, the lines passed the leak detection test (SAIC 1995). The area around the fuel dispensing island is paved with asphalt. Soil contamination was first observed when concrete posts were being installed around the fuel dispensing island in July 1994.

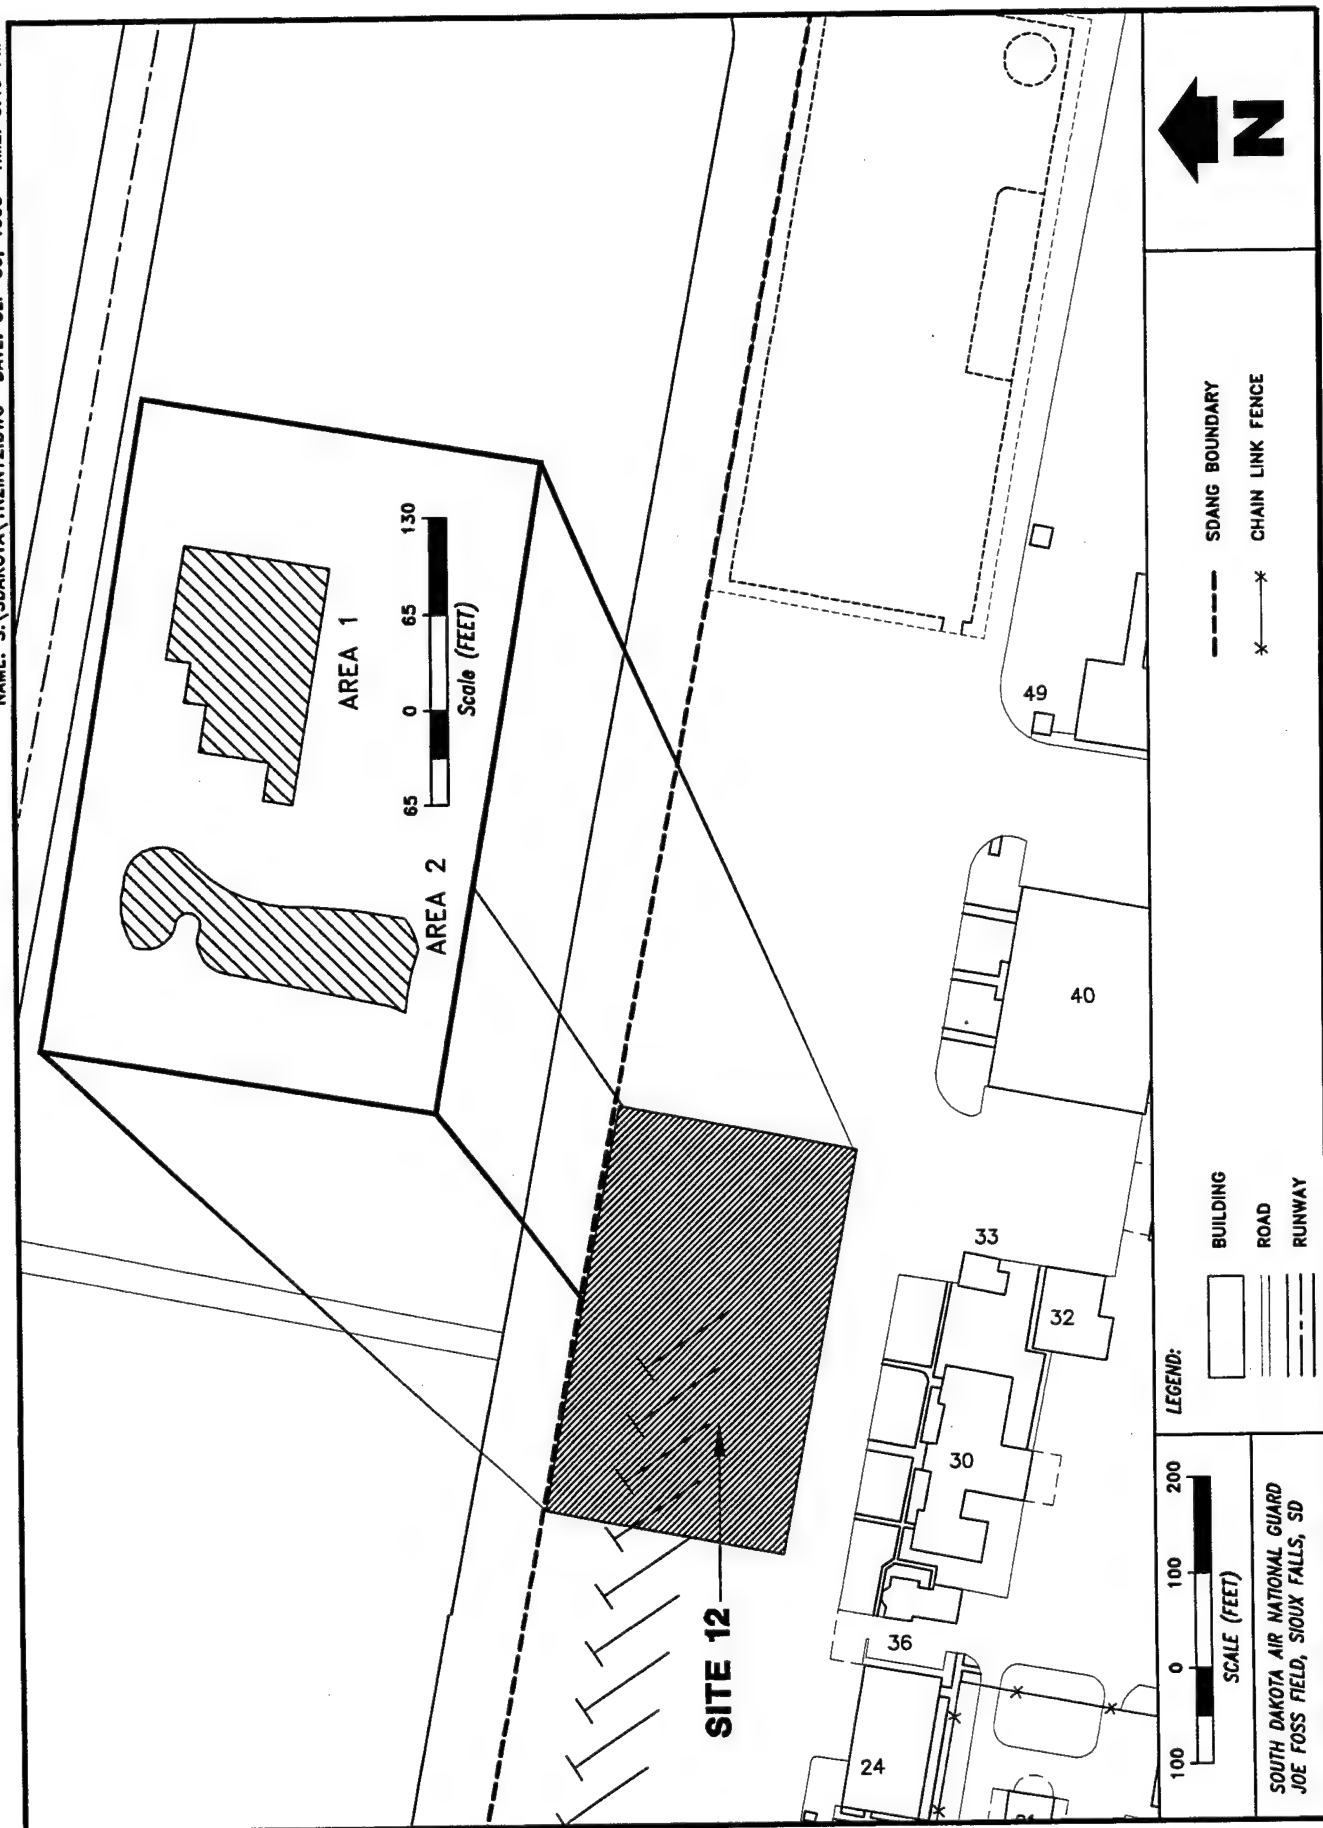


Figure 2-1. Location of Areas 1 and 2 within Site 12

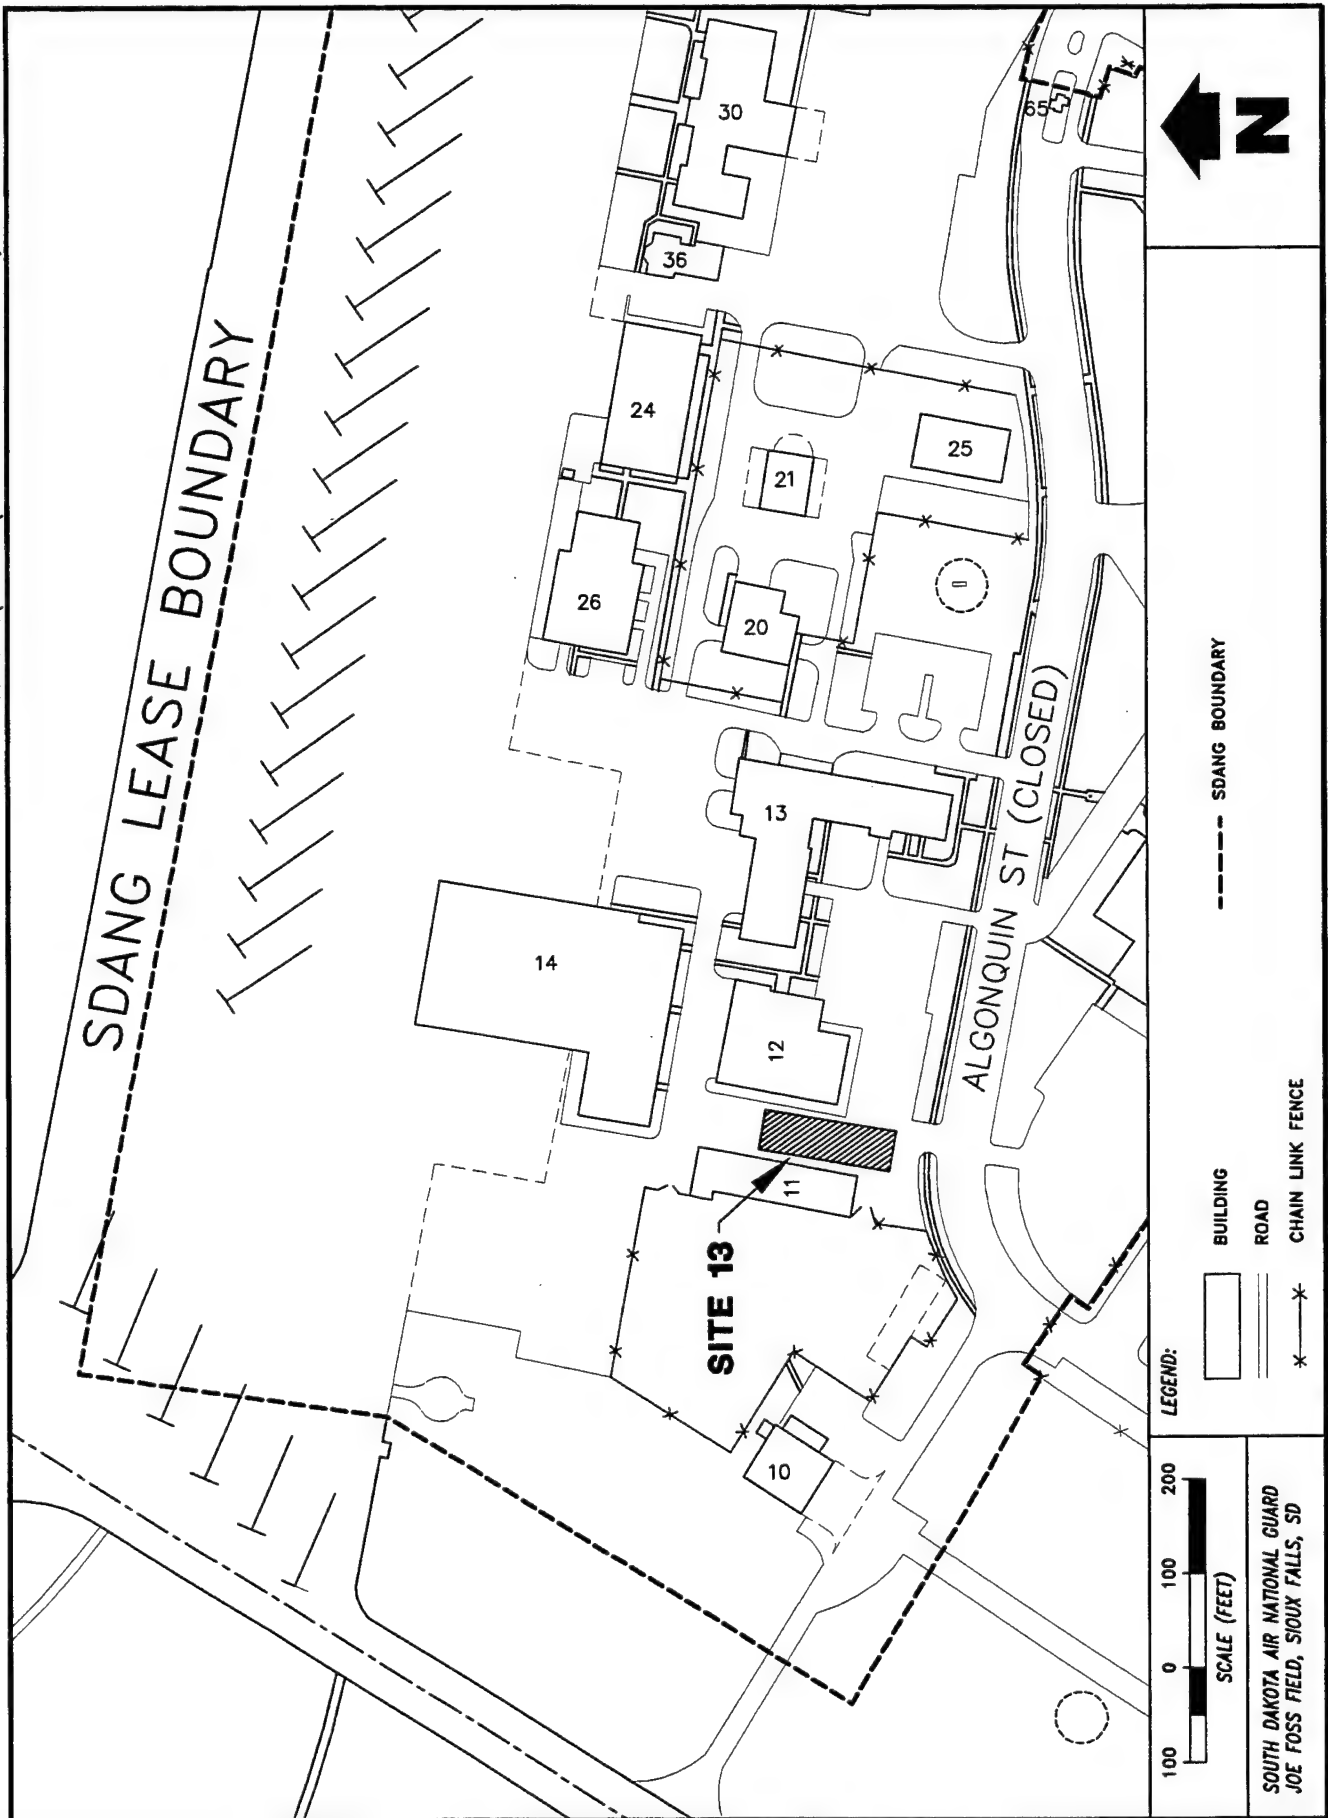


Figure 2-2. Location of Site 13

3. ENVIRONMENTAL SETTING

This section summarizes the geographical setting, regional and site geology, hydrology, climate, and critical habitats/endangered species for the South Dakota Air National Guard (SDANG). Sioux Falls is located in the Big Sioux River Valley in southeastern South Dakota. The surrounding terrain is composed of gently rolling hills, typical of the glaciated midwestern United States.

SDANG lies at the extreme southern edge of the Coteau des Prairies (Prairie Hills). This feature is a highland plateau in the western part of the Central Lowland Province, between the Minnesota River lowland to the east and the James River lowland to the west. The Big Sioux River, which runs adjacent to SDANG, is the only large stream that drains the Coteau des Prairies (Koch 1982).

SDANG lies entirely within the floodplain of the Big Sioux River, which has a flooding recurrence interval of 2.3 years (Jorgensen and Ackroyd 1973). Consequently, the associated topography of the SDANG area has little or no relief within a 1-mile radius of the site, as Figure 3-1 shows. The floodplain lowland is approximately 3 miles wide in the area of the airfield, which is nearly centered upon the floodplain. The Big Sioux River and the Diversion Channel have low gradients near the airfield.

3.1 METEOROLOGY

Climatic data for Sioux Falls are based on National Oceanic and Atmospheric Administration (NOAA) records from 1958 to 1987. The mean annual temperature in Sioux Falls is 46.1°F. Annual precipitation averages 25.18 inches. The wettest month is June, with an average precipitation of 4.14 inches. January is the driest month, with an average precipitation of 0.60 inches. Annual snowfall averages 39.7 inches. Net precipitation for the area is negative 9.63 inches per year, when calculated according to the method given in the Federal Register (HMTc 1986). Rainfall intensity based on a 1-year, 24-hour rainfall is 4.59 inches (HMTc 1986).

THIS PAGE WAS INTENTIONALLY LEFT BLANK

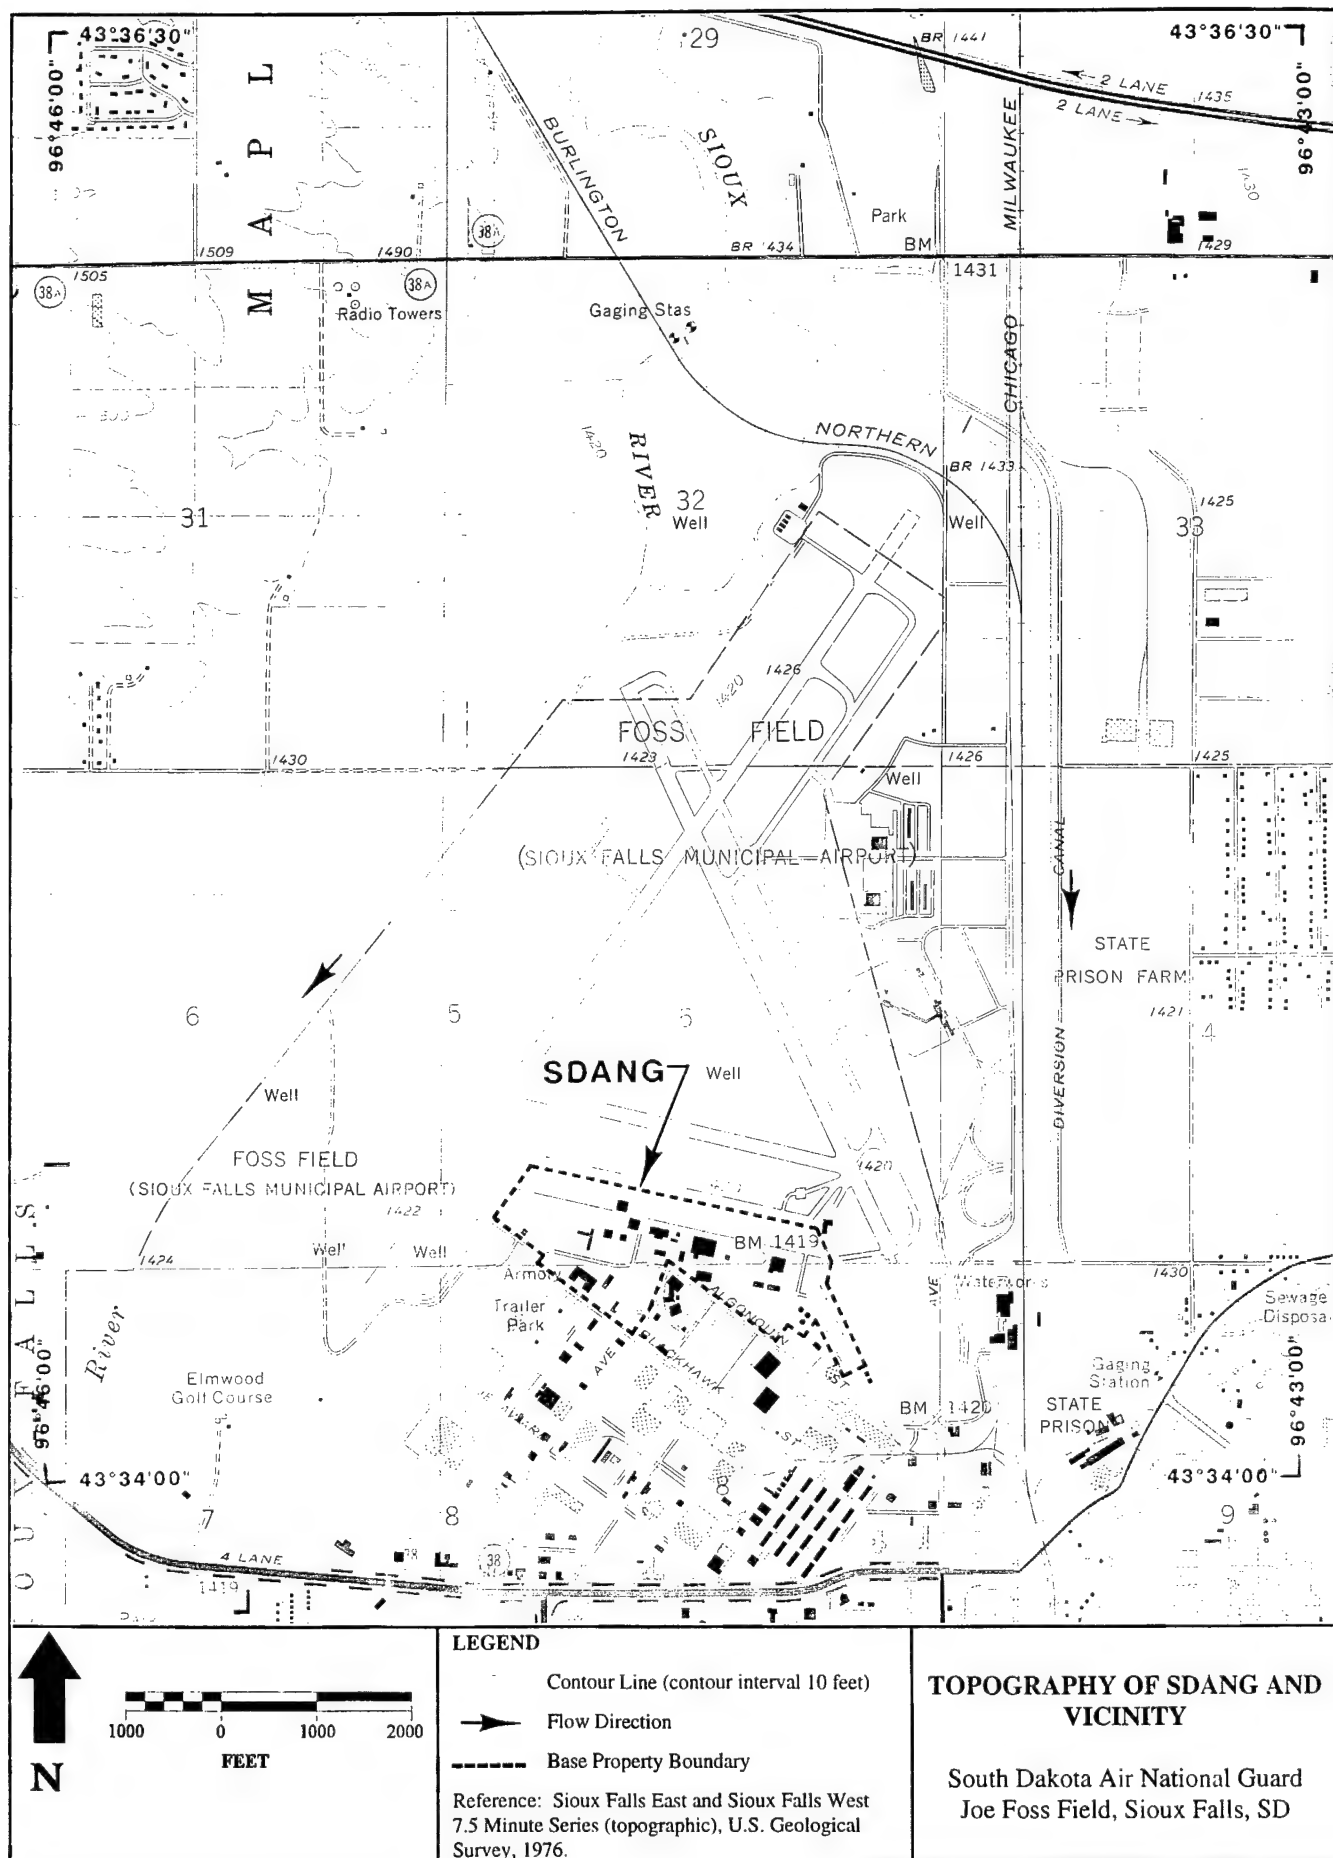


Figure 3-1. Topography of SDANG and Vicinity

THIS PAGE WAS INTENTIONALLY LEFT BLANK

3.2 GEOLOGY


3.2.1 Regional Geology

The geology of the Sioux Falls area is dominated by the effects of continental glaciation. The study area is within the Coteau des Prairies, a highland plateau. Figure 3-2 shows a generalized conceptual representation of the geology of this area (USDA 1964). This high plateau is an expression of the Sioux Uplift, a bedrock high that occurs within the area. The bedrock high deflected the southward advancing ice sheets to the east and the west and protected the highland area from glacial erosion. The Coteau des Prairies is flanked to the east and west by the moraines of these deflected ice sheets. Glacial outwash was deposited by streams of glacial meltwater originating from the continental ice sheets, on either side of the Coteau des Prairies, during periods of glacial retreat. The meltwater from these surrounding ice sheets was directed onto the Coteau des Prairies and into the Big Sioux River, which was a much larger braided river at the time.

The geology in the region consists of crystalline bedrock overlain by as much as 200 feet of glacial deposits. Within the Big Sioux River valley there is a thin (generally less than 15 feet), discontinuous mantle of alluvial sediments overlying the glacial deposits (Jorgensen and Ackroyd 1973).


In the Coteau des Prairies, bedrock consists of the Sioux Quartzite of Precambrian Age, thought to be more than 4,000 feet thick. The quartzite forms bedrock highs both in the Sioux Falls area and to the north near the town of Dell Rapids, where it forms rapids and waterfalls. In outcrop, this fine-grained formation exhibits relict bedding features, is extremely hard and fractured, and is pink (Jorgensen and Ackroyd 1973).

Approximately 200 feet of glacial sediment cover the quartzite over most of the region, with the exception of areas near bedrock highs, where sediments overlying the bedrock gradually thin and "pinch out." The sediment consists primarily of glacial till and glacial outwash. The glacial till is characterized by unstratified, unsorted masses of glacial debris, ranging in size from fine clayey material to large boulders. The till is approximately 200 feet thick in some parts of the Coteau des Prairies, but is generally thinner in the Big Sioux River valley, where

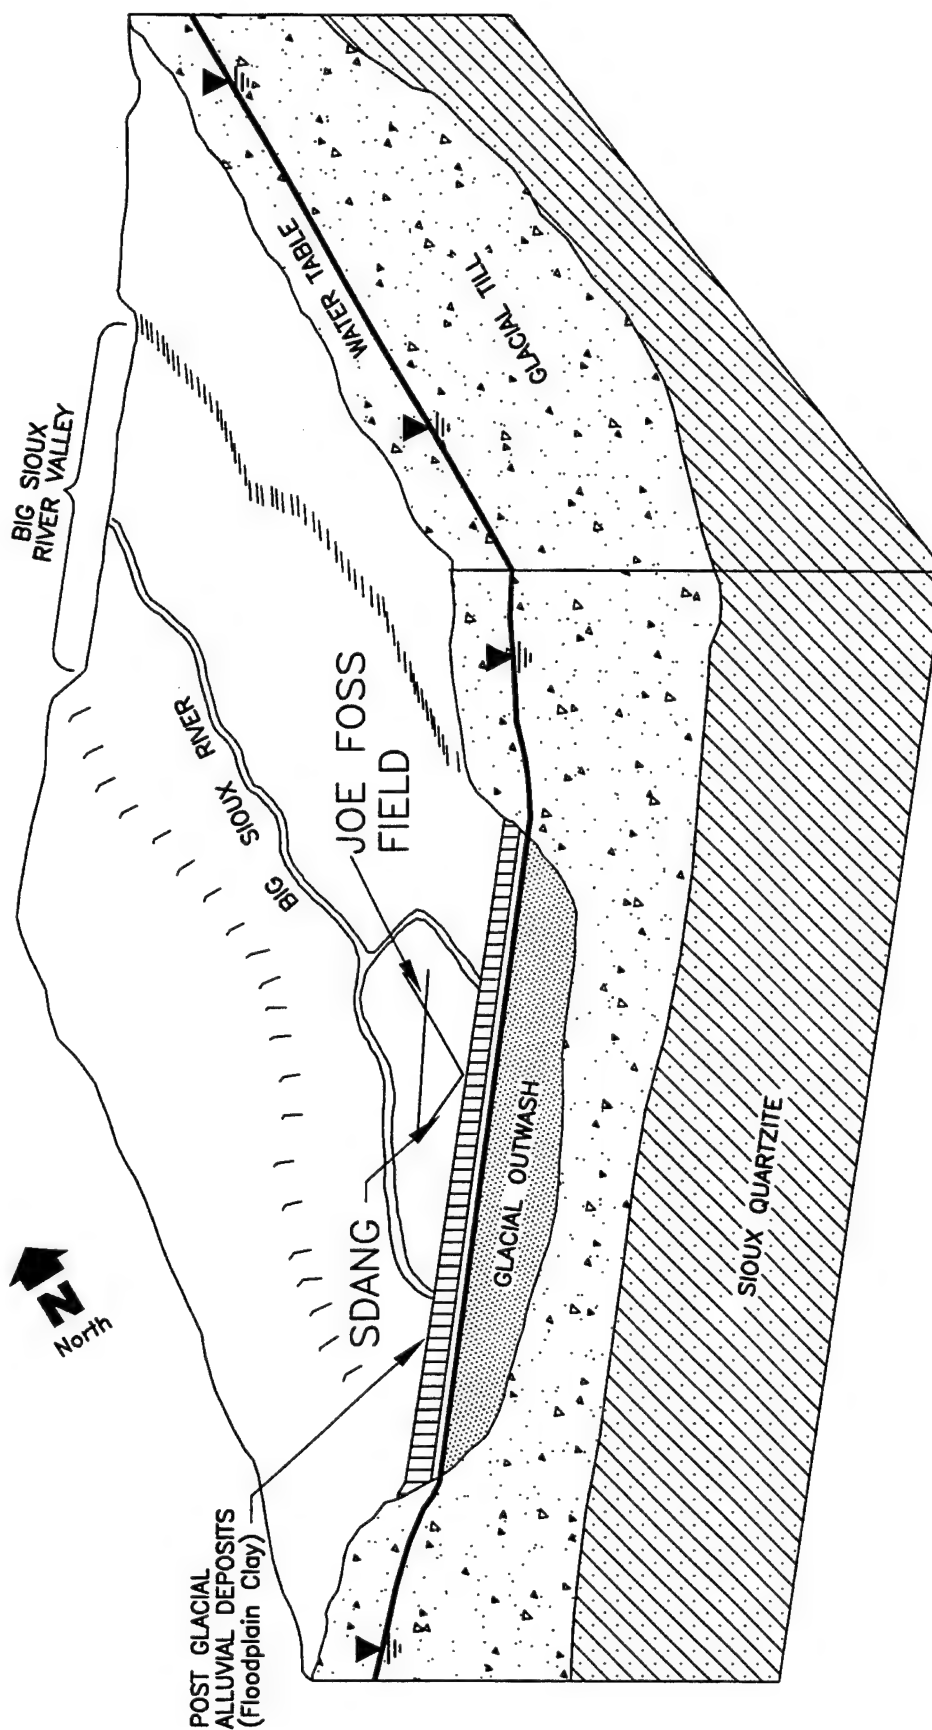


SOURCE: USDA 1984

LEGEND:



WATER TABLE


GLACIAL TILL



SIOUX QUARTZITE



POST GLACIAL ALLUVIAL DEPOSITS



GLACIAL OUTWASH



NOT TO SCALE

SOUTH DAKOTA AIR NATIONAL GUARD
JOE FOSS FIELD, SIOUX FALLS, SD

Figure 3-2. Generalized Hydrogeologic Conceptual Model of the Coteau des Prairies

it has been eroded by the scouring of the river. The till is very thin or nonexistent in the localized bedrock high areas in the Sioux Falls area.

Restricted laterally to the river valley and to the north and south by Sioux Quartzite outcrops, at least 50 feet of coarse-grained glacial sediment has been deposited upon the till. This glacial outwash consists of stratified coarse sand and gravel along with trace amounts of silt and clay.

A variably thick (0- to 20-foot) mantle of post-glacial alluvial deposits overlies the sediment within the river valley. Post-glacial alluvial deposits were formed by re-deposition of glacially derived sediments by the Big Sioux River. The deposits consist of very fine-grained floodplain deposits with some slightly coarser-grained river channel deposits. Because of their thinness and surface location, the floodplain deposits have been disturbed by construction activities throughout the valley.

3.2.2 Site Geology

Soil sampling associated with drilling operations during the Site Investigation (SI) provides details on the subsurface geology at SDANG. Additional information was obtained from soils data collected during the 1986 Remedial Investigation (RI) at Site 1 - Underground Fuel Storage Area and Site 3 - Base Fire Training Area (SAIC 1990). Sediments encountered included post-glacial alluvial deposits (floodplain clay), glacial outwash, and glacial till (SAIC 1990). Soil boring logs from the SDANG SI field program are presented in Appendices B, C, and D.

A surface layer of post-glacial alluvial deposits was encountered in all soil borings and monitoring wells at SDANG. The layer was laterally continuous throughout the site, with the exception of Site 1 - Underground Fuel Storage Area and Site 9 - Underground Storage Tank. At these sites, past construction activities have disturbed or eliminated this layer. In general, this 6- to 15-foot thick deposit consists of dark gray, clayey silt with traces of fine sand. However, in the area of Site 12 - Ramp Area and Site 13 - Motor Vehicle Maintenance Facility

(MVMF), this layer consists of very dark brown to black, very fine, highly plastic clay, which grades into a dark gray to brown, clayey silt with traces of fine sand.

Glacial outwash was encountered underlying the surface alluvial deposits. The deposits ranged from 20 to approximately 25 feet thick at Site 1. Samples generally were composed of gray to dark olive brown, sandy gravels with traces of silt and clay. Glacial till was found beneath the outwash at Site 1. The outwash/till contact was located at a depth of approximately 30 to 35 feet. The thickness of this till unit is approximately 100 to 130 feet in the vicinity of SDANG (Koch 1982). However, during the SI, the base of the till was not penetrated.

The character of the post-glacial alluvial deposits determines the soil types found at the sites. Figure 3-3 shows the soil types present in the immediate area of SDANG. The majority of these soil types are in the Luton-Dimmick association. These soils consist of fine-textured to moderately fine-textured floodplain soils. The soil type underlying both Sites 12 and 13 is the Luton, which is the finest grained of the association. In addition, the Rauville and Dimmick soils are close to each site; these soil types are slightly coarser grained and are associated with river channel deposits (USDA 1964).

3.3 REGIONAL AND LOCAL HYDROLOGY

3.3.1 Regional Subsurface Hydrology

The primary aquifer in the Sioux Falls area, the Big Sioux Aquifer, constitutes approximately 36 square miles within the saturated portions of the gravelly sand glacial outwash deposits, as shown in Figure 3-4. This figure also illustrates the approximate boundaries of the aquifer. The water table aquifer is generally bounded underneath and to the east and west by glacial till and to the north and south by the bedrock highs of the Sioux Quartzite. These materials form low permeability boundaries to the aquifer. Regionally, the aquifer ranges in thickness from 0 feet where the sediments pinch out along the valley flanks and Sioux Quartzite outcrops, to as much as 50 feet within the south-central portions of the valley.

Recharge of the aquifer is primarily by precipitation infiltration and seepage from the Big Sioux River. Of the precipitation that fell within the drainage area of the Big Sioux River

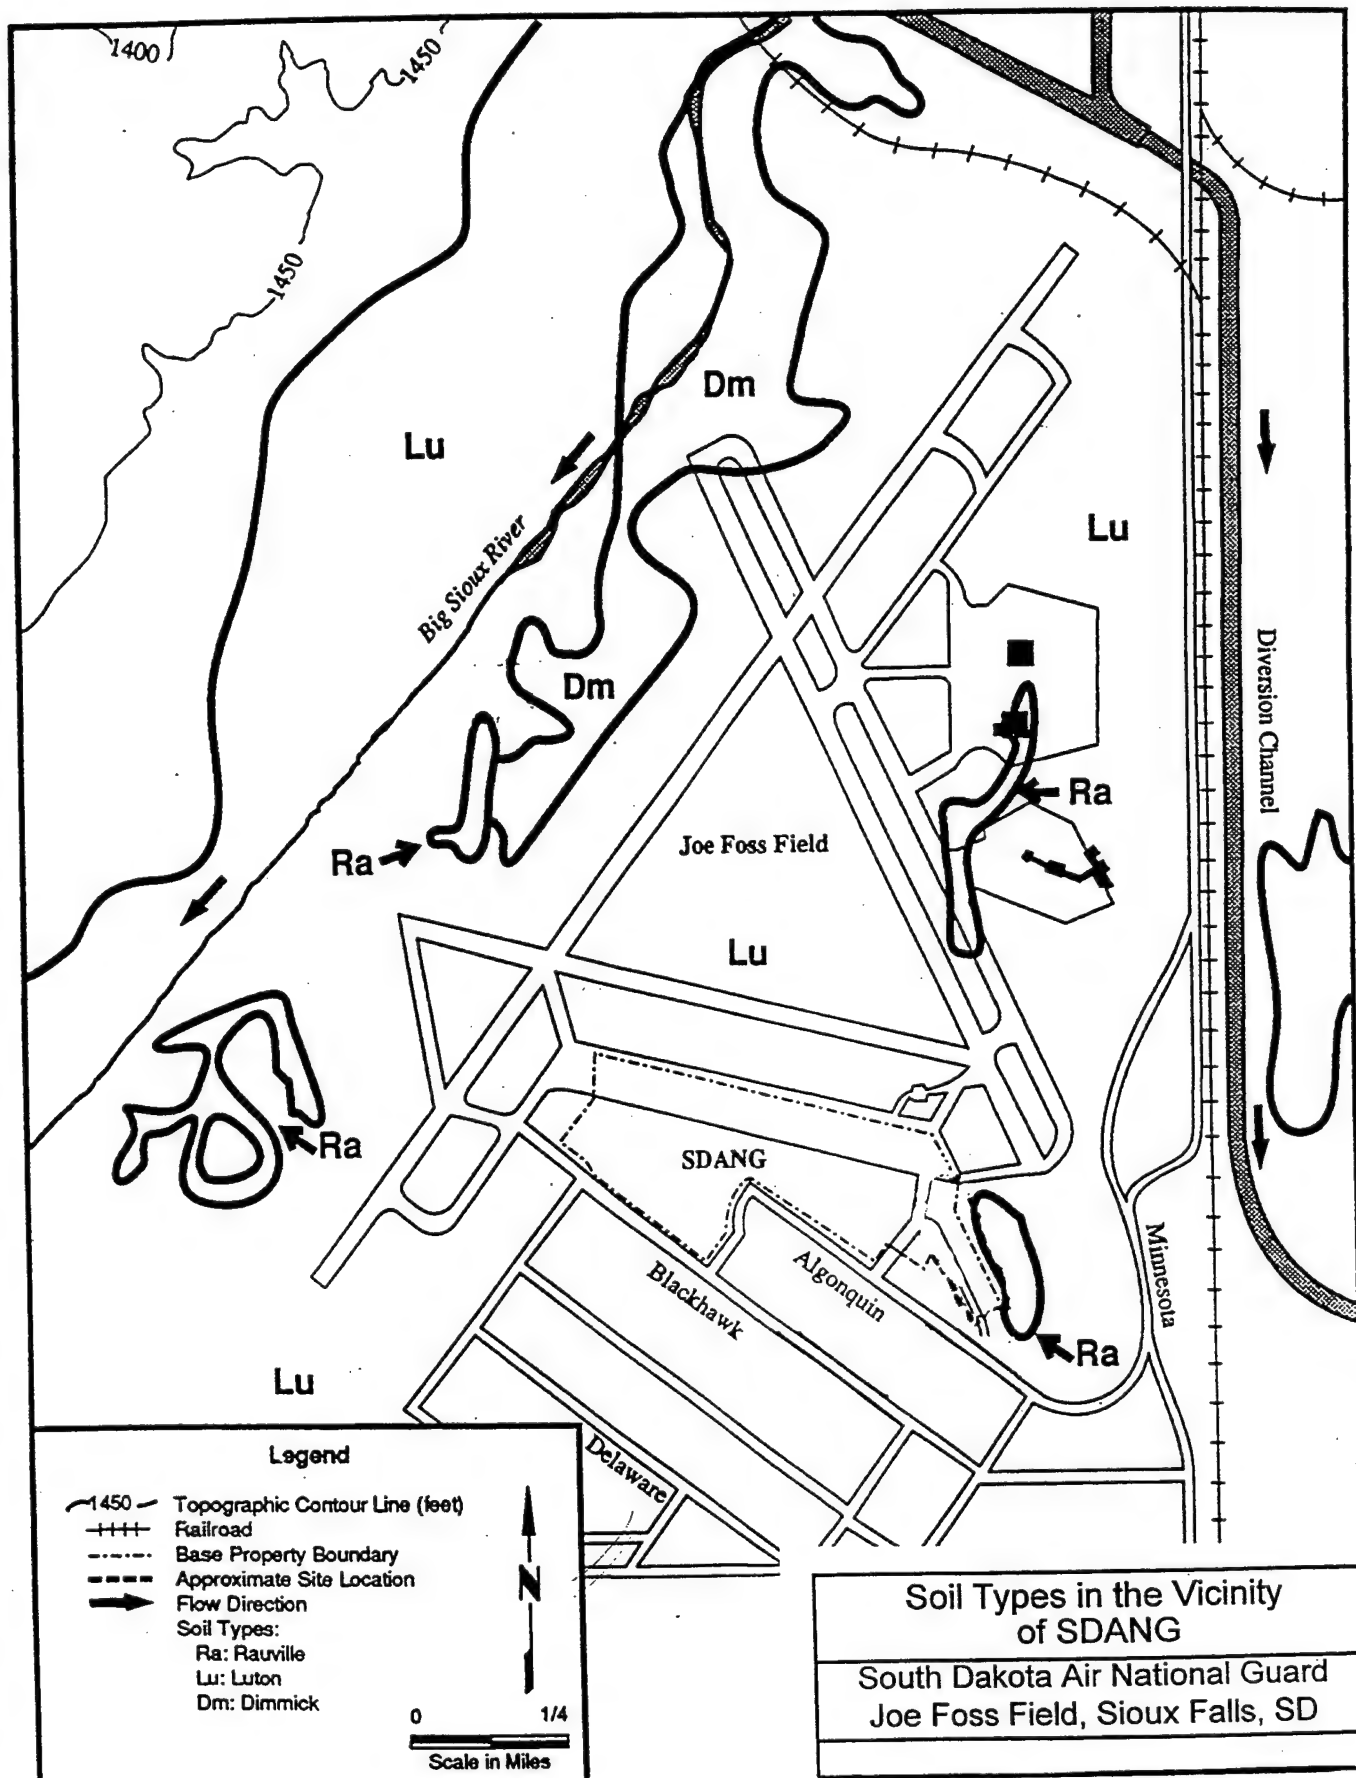


Figure 3-3. Soil Types of SDANG and Vicinity

NAME: S:\SDAKOTA\SDAUQFR.DWG DATE: SEP 07, 1995 TIME: 9:30 AM

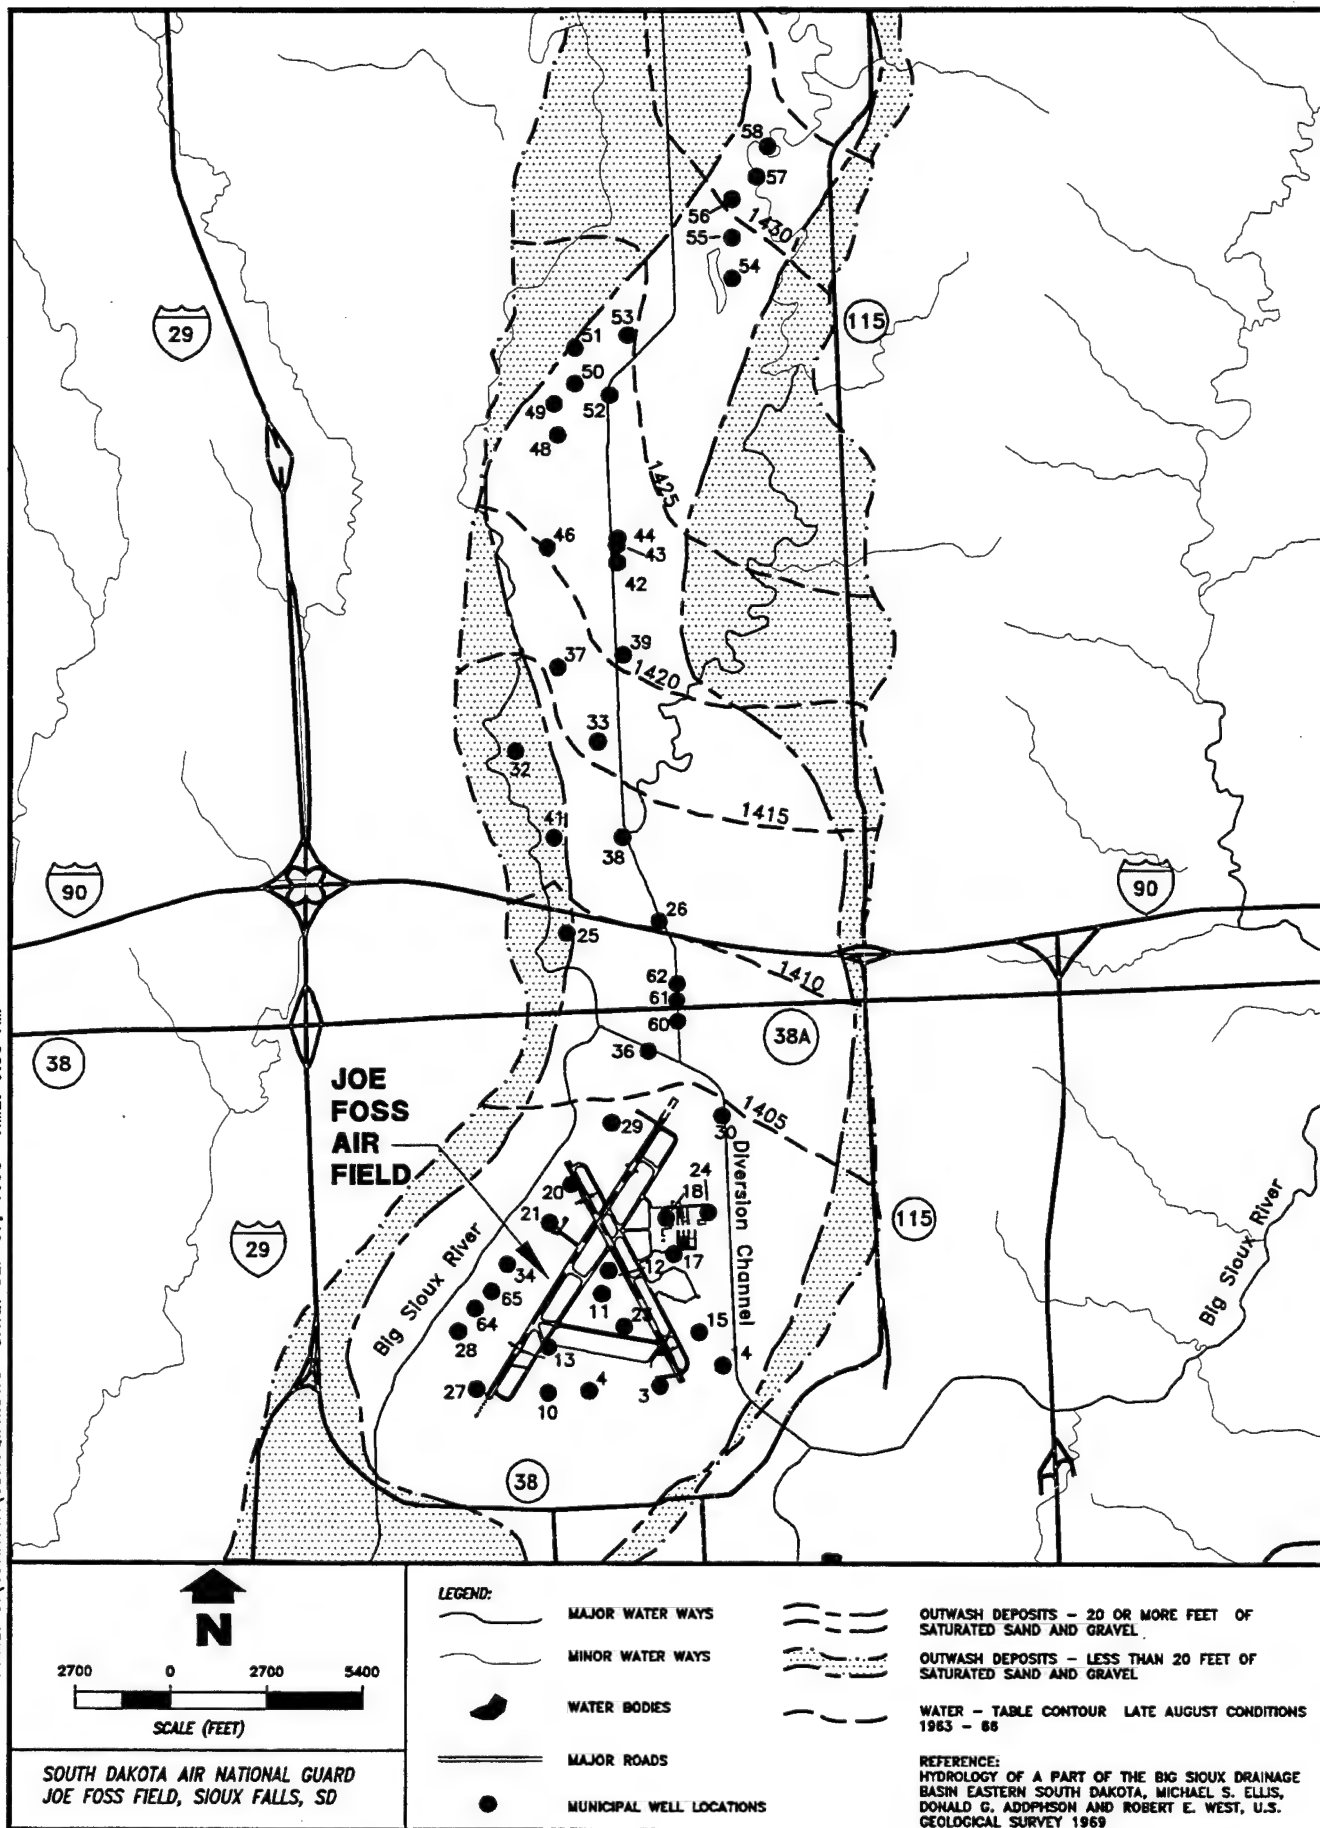


Figure 3-4. The Big Sioux Aquifer at SDANG and Vicinity

between 1970 and 1979, an estimated 90.5 percent was returned to the atmosphere through evapotranspiration, 1.5 percent was contributed to the surface water runoff, and 8 percent was added to aquifer storage (Koch 1982). Recharge by river seepage occurs primarily in the southern third of the aquifer where seepage is induced by the pumping of the city of Sioux Falls municipal well field. During periods of low stream flow, as much as 95 percent of the stream flow may infiltrate into the aquifer in this area (Koch 1982). Stream bed infiltration rates have been measured ranging from 4 to 7.4 gallons per day per foot (gal/day/ft) and vary according to scouring of the stream bed, the influence of dams, dredging activities, and stream levels (Jorgensen and Ackroyd 1973).

Discharge of the aquifer occurs through evapotranspiration and seepage into the Big Sioux River and by groundwater pumpage. Discharge by seepage from the aquifer into the river occurs primarily in the northern two-thirds of the aquifer. Groundwater pumpage occurs primarily in the southern third of the aquifer by the city of Sioux Falls municipal well field. Approximately 3.2 billion gallons were extracted from the aquifer in 1993.

The following information represents average trends and that the hydrologic system is dynamic, fluctuating seasonally and yearly, depending on the relative strengths of the components of aquifer recharge and discharge. Groundwater table depths vary from 0 to 20 feet below land surface (BLS). Water table elevations range from 1,400 to 1,470 feet above mean sea level (msl) in the southern and northern portions of the aquifer, respectively. Yearly groundwater level fluctuation averages 4.2 feet, depending on pumping and precipitation amounts (Koch 1982). Groundwater levels tend to rise in the spring and early summer when precipitation (snowmelt and rainfall) infiltration is highest. Levels are lower from mid-summer to late fall when precipitation is low and groundwater pumpage is at a maximum. Significant changes in the water levels in the aquifer depend upon recharge and withdrawal rates. During the SI field program, the water table was present at 7 to 9 feet BLS. As a part of their water level monitoring program, the city of Sioux Falls has collected and recorded water level measurements in as many as 71 monitoring wells completed in the Big Sioux Aquifer since 1979. Currently, the water levels in 53 monitoring wells are measured monthly and an additional 10 monitoring wells are monitored 2 to 4 times a year.

In the northern two-thirds of the aquifer, groundwater flow is generally north to south, with a component of flow toward the river, where groundwater discharges. In the southern one-third of the aquifer, groundwater flow directions are influenced by pumping at the municipal well field. Generally, flow is directed radially inward toward the central portion of the valley.

Hydraulic conductivity (K) values range from 1,500 to 6,500 gal/day/ft (10^{-2} to 10^{-1} cm/sec) (Koch 1982). Hydraulic conductivity values obtained by the city of Sioux Falls for short-term pumping tests of 39 municipal wells ranged between 5.54×10^{-1} cm/sec and 2.0×10^{-2} cm/sec (HDR 1990).

The primary use of groundwater in the southern one-third of the Big Sioux Aquifer is the municipal water supply for the city of Sioux Falls. The production wells are located in a well field that covers the southern one-third of the aquifer. The majority of these wells are located adjacent to the Big Sioux River to take advantage of induced recharge effects. Figure 3-4 and Table 3-1 show the locations of the municipal wells and 1994 pumpage for the municipal water supply, respectively. In 1994, total pumpage from these groundwater wells exceeded 3.2 billion gallons. The well field is augmented by two surface water intakes within the Diversion Channel, which supplied 2 billion gallons in 1993. Municipal wells 3, 4, 10, 13, 15, and 23, located near SDANG, are only pumped periodically by the city for preventive maintenance and are not currently in use for water supply. Relatively small amounts of groundwater also are used for water supply in small communities to the north and for irrigation purposes throughout the valley.

3.3.2 Site Hydrology

The saturated outwash deposits comprise the Big Sioux Aquifer in the study area. Characteristics of this aquifer are summarized in Table 3-2. Figure 3-5 shows the hydrograph of the water level measured in 1993 in municipal wells 4, 10, 14, and 15 located near SDANG. The static water level fluctuations agree with the seasonal variations of higher levels in the summer and decreasing during the fall and winter. The static water levels during the SI were higher than those observed during the RI conducted at SDANG in 1988 and 1989 due to higher than normal precipitation.

TABLE 3-1. Summary of Sioux Falls, South Dakota Municipal Water Supply Well Data (1994)									
Well ID	Type	Year Constructed	Depth (ft)	Diameter (ft)	Gallons Pumped (1993)	Hours Pumped (1993)	Pumping Rate (GPM)	Percent Of Total	
3	Wolfe	1911	32	50	1,382,800	94	245	0.02	
4	Ranney	1931-1956	34	50	8,542,900	126	1130	0.13	
10	Early Bragstad	1934	37	18	4,037,000	104	647	0.06	
11	Early Bragstad	1934	37	18	9,230,300	285	540	0.14	
12	Early Bragstad	1941	36	18	10,644,000	283	627	0.16	
13	Bragstad	1941	35	40	9,267,000	162	953	0.14	
14	Bragstad	1942	30	40	3,428,000	444	129	0.05	
15	Bragstad	1943	44	40	41,108,500	549	1248	0.64	
17	Bragstad	1943	36	40	7,187,000	262	457	0.11	
18	Bragstad	1943	39	40	25,275,000	422	998	0.39	
20	Bragstad	1944	37	40	80,873,000	2159	624	1.26	
21	Bragstad	1945	35	40	179,892,000	3338	898	2.81	
23	Bragstad	1950	34	40	15,082,000	146	707	0.23	
24	Bragstad	1950	38	40	20,981,000	660	530	0.32	
25	Bragstad	1951	35	40	35,320,700	1203	489	0.55	
26	Bragstad	1951	34	40	93,944,100	2574	608	1.46	
27	Bragstad	1954	39	40	89,571,100	2385	626	1.40	
28	Bragstad	1956	40	40	179,863,900	2852	1051	2.81	
29	Ranney	1956	41	13	39,357,000	252	2603	0.61	
30	Ranney	1956	50	13	83,747,000	767	1819	1.30	
31	Ranney	1957	48	13	357,807,600	2971	2007	5.59	
32	Ranney	1957	41	13	297,276,000	2393	2070	4.64	
33	Ranney	1957	38	13	116,496,000	1589	1222	1.82	
36	Ranney	1974	40	16	13,005,000	131	1655	0.20	
37	Ranney	1975	33	16	194,238,000	2464	1314	3.03	
38	Ranney	1977	36	16	41,265,000	782	879	0.64	
39	Ranney	1977	34	16	42,246,000	871	810	0.66	
42	42" Gravel Pack	1978	41	2.6	46,258,100	1311	591	0.72	
43	42" Gravel Pack	1978	40	2.6	28,117,500	759	617	0.43	
44	42" Gravel Pack	1978	38	2.6	59,620,200	1625	611	0.93	
45	42" Gravel Pack	1978	39	2.6	0	0	0	0.00	
46	Ranney	1980	46	16	299,164,000	2964	1682	4.67	
47	Ranney	1980	41	16	128,707,200	3115	689	2.01	
DC1	Diversion Channel	1964			0	0	0	0.00	
DC2	Diversion Channel	1968			0	0	0	0.00	
34A	20" Gravel Pack	1988	41	1	34,124,000	1473	341	0.53	
60	20" Gravel Pack	1988	40	1	31,885,300	850	625	0.49	
61	20" Gravel Pack	1988	39	1	17,530,500	461	634	0.11	
62	20" Gravel Pack	1988	38	1	7,570,300	199	634	0.11	
63	20" Gravel Pack	1988	39	1	8,139,200	272	499	0.12	
64	20" Gravel Pack	1989	44	1	5,570,800	309	300	0.08	
65	20" Gravel Pack	1989	45	1	20,240,600	616	548	0.31	
					Subtotal	2,687,995,600		41.68	

Note: Well No. 45 has been abandoned.

TABLE 3--1. Summary of Sioux Falls, South Dakota Municipal Water Supply Well Data (1994) (continued)							
Well ID	Type	Year Constructed	Depth (ft.)	Diameter (ft.)	Gallons Pumped (1993)	Hours Pumped (1993)	Percent Of Total
48	20" Gravel Pack	1987	47	1	31,337,000	1,323	0.48
49	20" Gravel Pack	1987	45	1	58,701,000	1,843	0.91
50	20" Gravel Pack	1987	44	1	40,532,000	1,843	0.63
51	20" Gravel Pack	1987	43	1	22,529,000	1,553	0.35
52	20" Gravel Pack	1987	38	1	39,917,000	1,937	0.62
53	20" Gravel Pack	1987	49	1	37,110,000	1,276	0.58
54	20" Gravel Pack	1988	42	1	20,442,000	1,079	0.31
55	20" Gravel Pack	1988	44	1	34,859,000	2,110	0.54
56	20" Gravel Pack	1988	41	1	25,813,000	1,662	0.40
57	20" Gravel Pack	1988	45	1	59,627,000	2,694	0.93
58	20" Gravel Pack	1988	45	1	30,262,000	1,641	0.47
River Pump Station					2,898,000,000	6733	45.30
					Subtotal	3,299,129,000	51.52
Wells Outside Big Sioux Aquifer							
66	20" Gravel Pack	1989	51	1	92,905,000	4,623	1.45
67	20" Gravel Pack	1989	122	1	124,096,100	7,209	1.93
68	20" Gravel Pack	1951	148	1	109,320,500	6,463	1.70
					Subtotal	326,321,600	5.08
Total Treated Water					6,313,446,200		98

Note: Well No. 66 is located west of Sioux Falls in Skunk Creek Aquifer
Well Nos. 67 and 68 are located east of Sioux Falls in Split Rock Creek Aquifer

**Table 3-2. Characteristics of the Big Sioux Aquifer
in the Vicinity of SDANG, Joe Foss Field, Sioux Falls, South Dakota**

Parameter	Municipal Well #15*	Municipal Well #23*
Aquifer Material	Glacial outwash-sandy gravel with traces of silt and clay.	Glacial outwash-sandy gravel with traces of silt and clay.
Saturated Thickness	21.12 feet	18.95 feet
Static Groundwater Depth (Elevation)	9.23 feet (1406.39 feet msl)	9.9 feet (1406.77 feet msl)
Transmissivity	68,579 gpd/ft	63,559 gpd/ft
Permeability	3,335 gpd/ft	3,325 gpd/ft

Source: HDR 1990.

* See Figure 3-4.

Groundwater Elevations - 1994

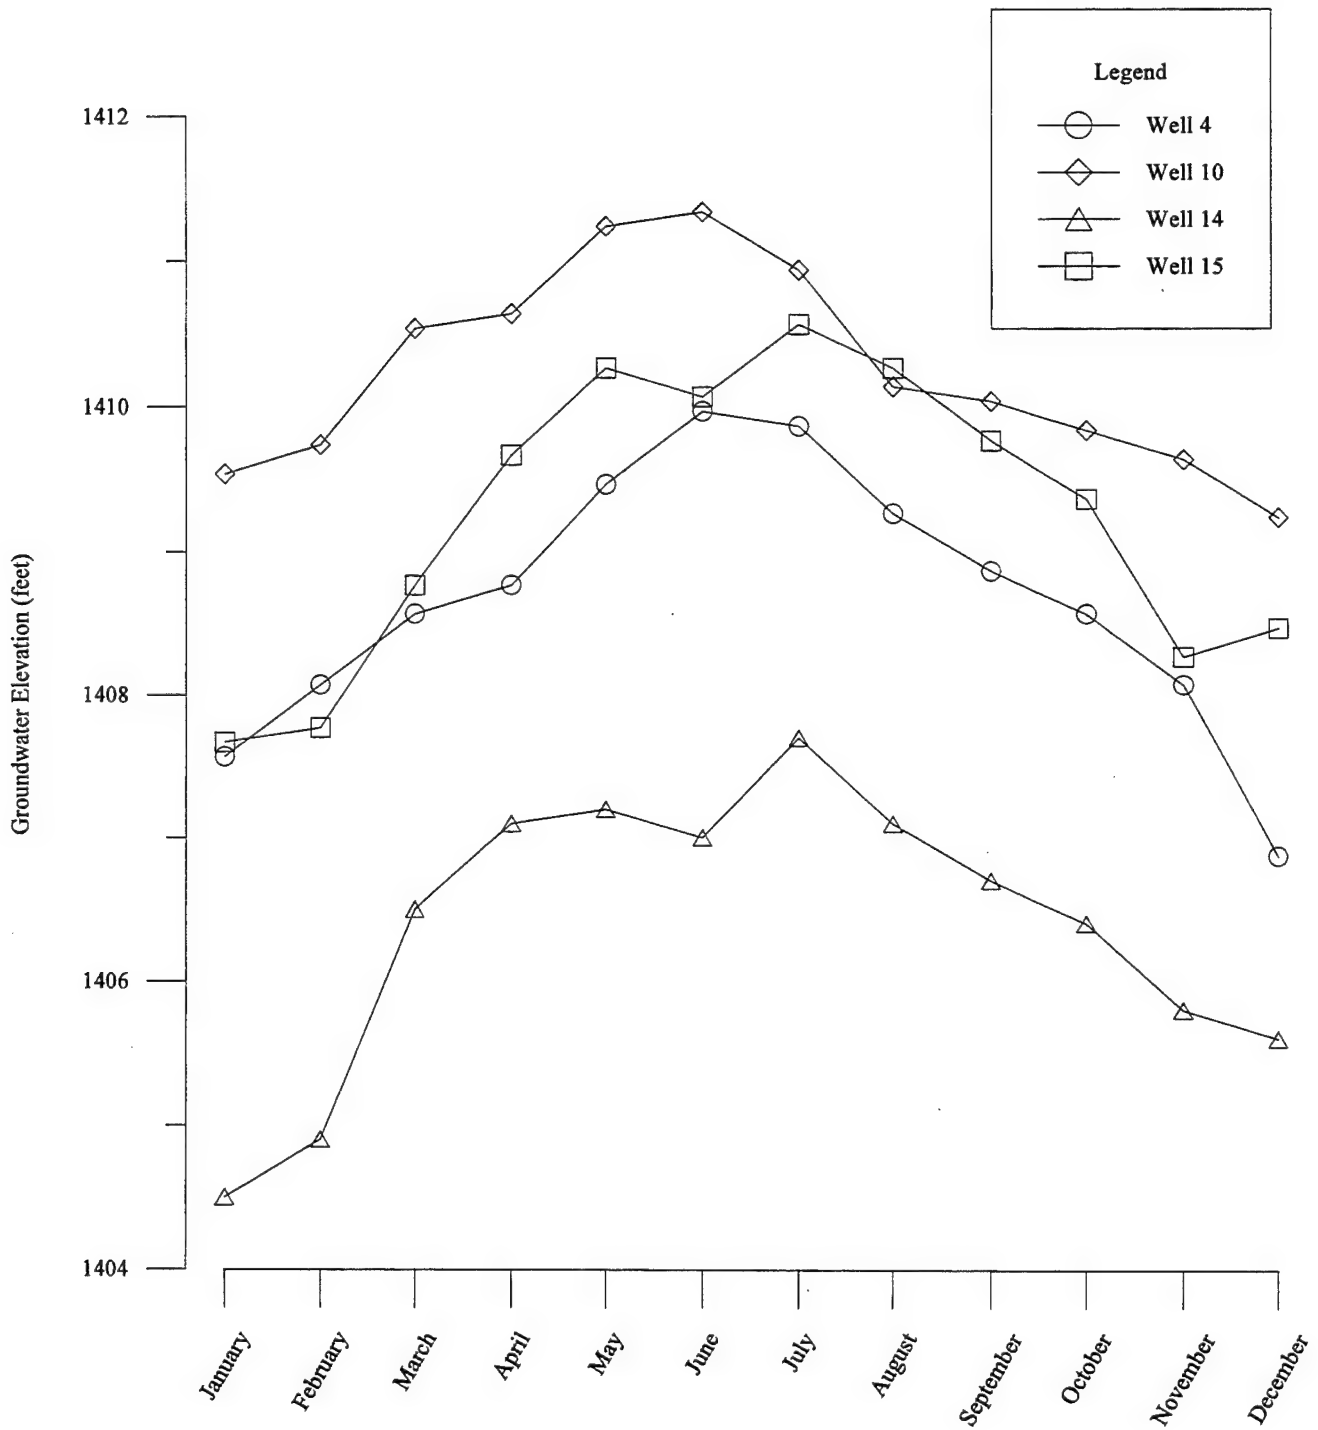


Figure 3-5. Hydrograph of Selected Municipal Wells

During piezometer and monitoring well installations within Sites 12 and 13, static water levels ranged from approximately 6 to 7 feet BLS, as shown in Figure 3-6. Flow direction determined using data from the three newly installed piezometers at Site 12, was to the southwest.

3.4 CRITICAL HABITATS/ENDANGERED OR THREATENED SPECIES

3.4.1 Wetlands

The U.S. Fish and Wildlife Service (USFWS) recognizes wetlands as vital resources for migratory waterfowl; therefore, wetlands are considered under USFWS's "no net loss of wetlands" policy. As part of the Federal Government's program to preserve and enhance the Nation's wetlands, the National Wetlands Inventory (NWI) project has developed maps of wetland types.

The NWI map of designated wetlands in the area of SDANG is presented in Figure 3-7. Table 3-3 describes the abbreviations used in the figure. Most of the wetlands near SDANG are temporary. Several of these small wetland areas are located near the Base Fire Training Area (Site 3). However, no wetlands have been identified in or around Sites 12 and 13.

**Table 3-3. Descriptions of Wetland Designations
for Sioux Falls, South Dakota Area**

Wetland Designation	Description
PEMA	Palustrine, emergent, temporarily flooded
PEMAx	Palustrine, emergent, temporarily flooded, artificially excavated
R2UBGx	Lower perennial riverine, unconsolidated bottom, intermittently exposed, excavated

Source: U.S. Department of the Interior, Fish and Wildlife Service, South Dakota State Office (1989)

3.4.2 Endangered and Threatened Species

Information on rare and threatened species that may be found within or near the project area was obtained from the U.S. Department of the Interior (DOI) and the South Dakota Department of Game, Fish, and Parks. Table 3-4 lists these species and their environment of

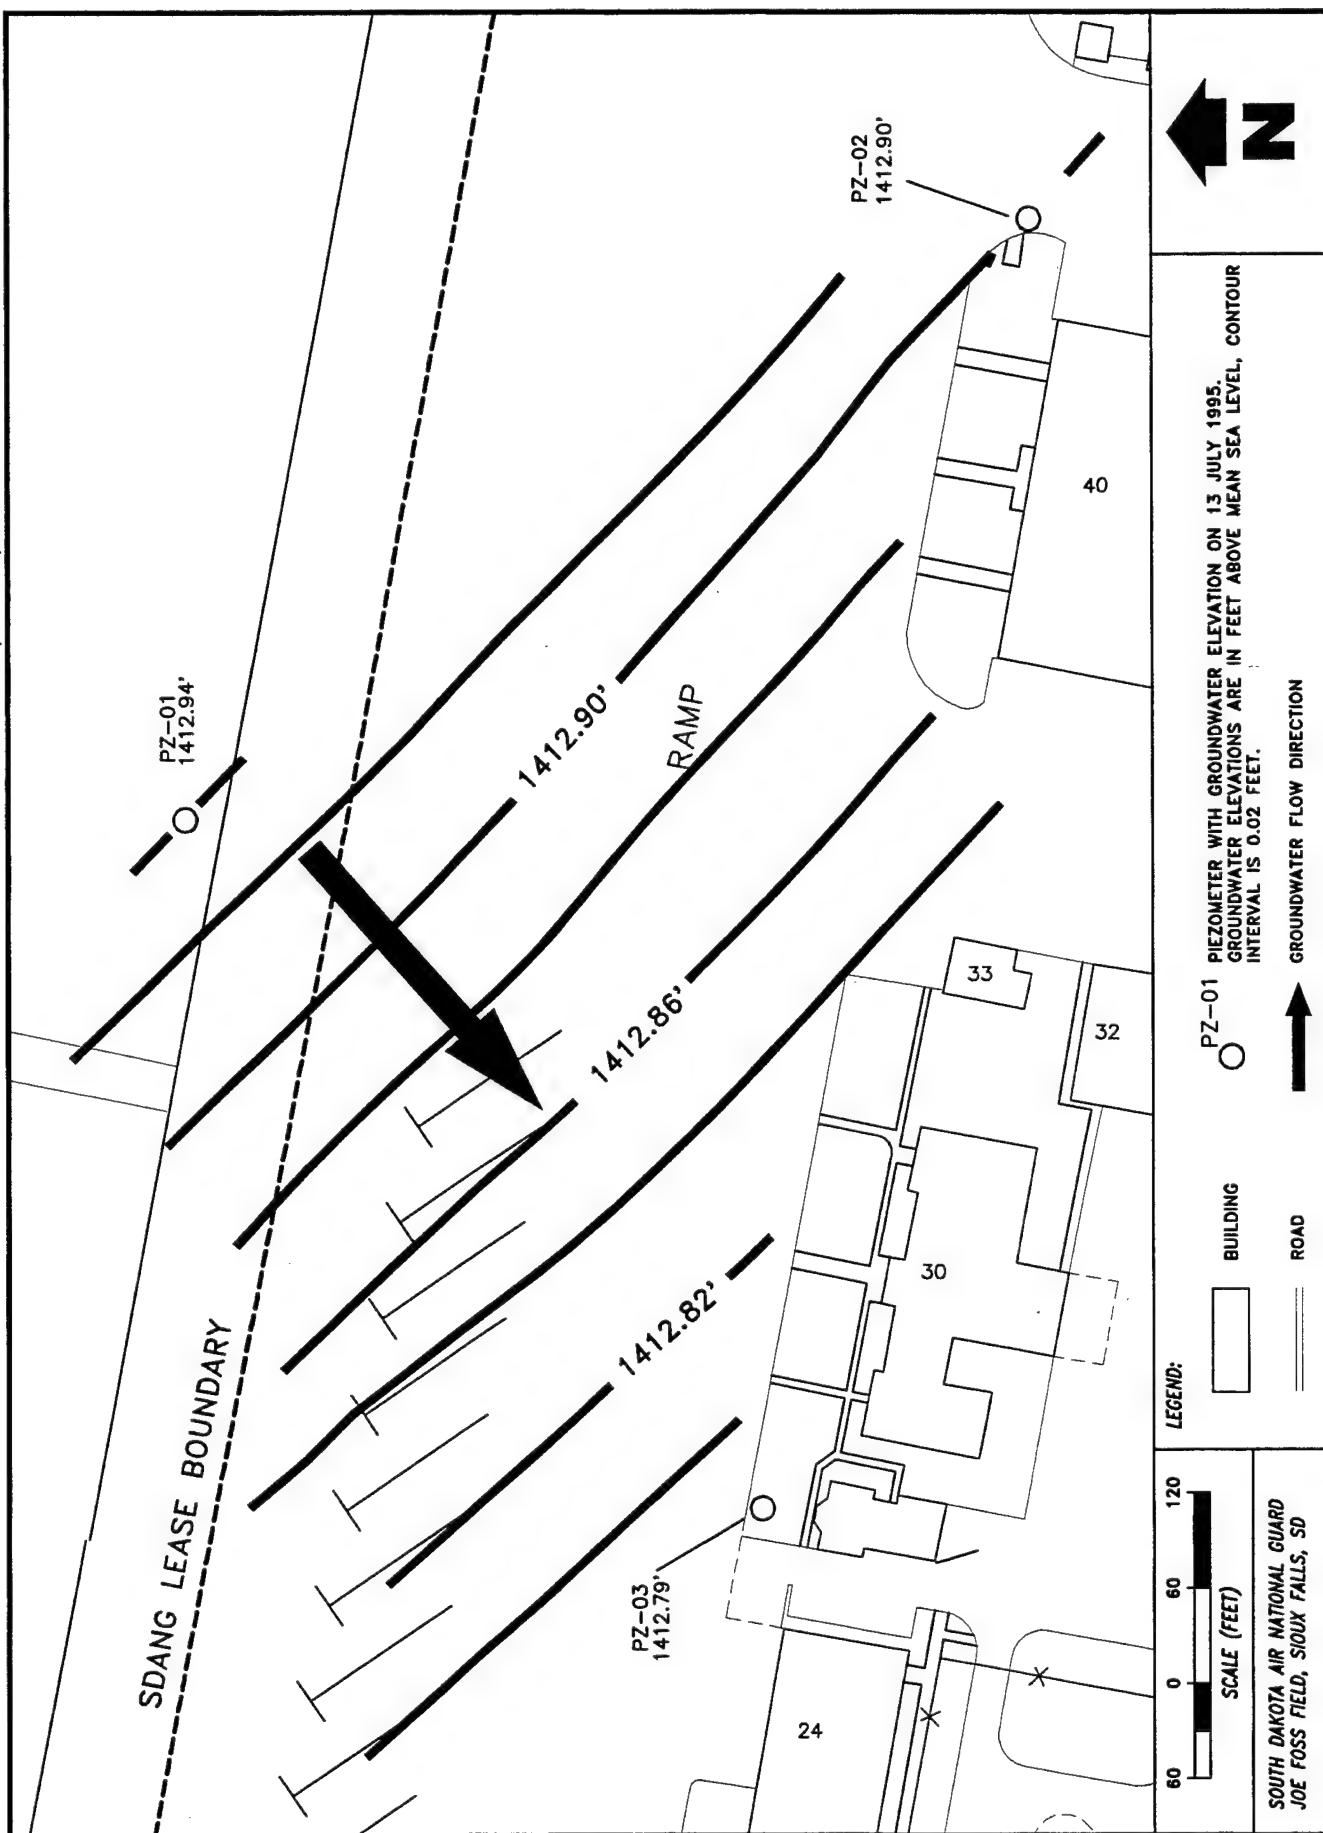


Figure 3-6. Groundwater Levels in Piezometers at Site 12 on 13 July 1995

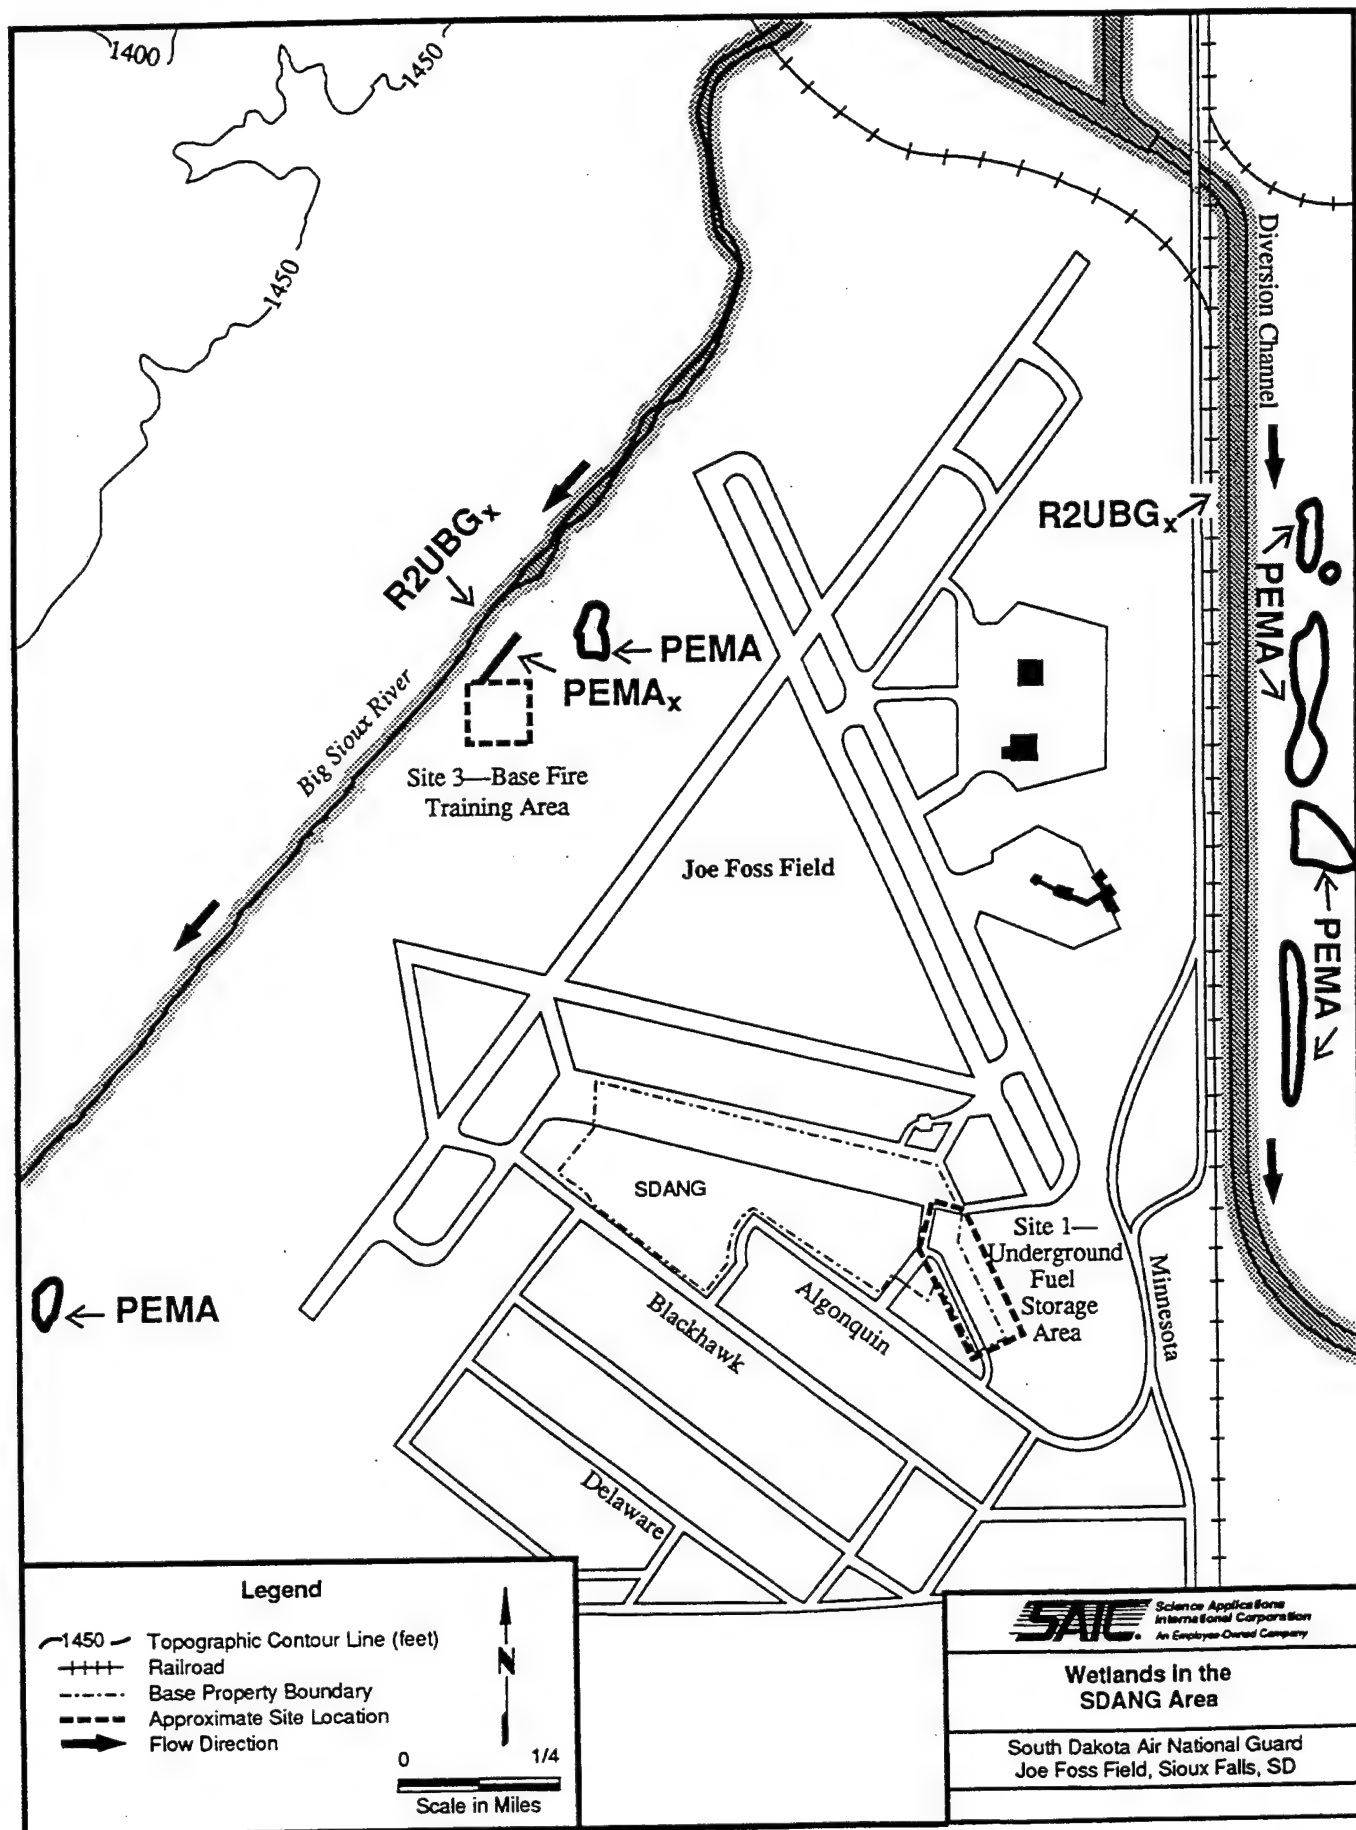


Figure 3-7. Wetlands in the SDANG Area

probable occurrence. The species consist of two prairie plants, an amphibian, and several species of migratory birds. There is no reason to expect that any of these bird species would be attracted to the site, since no critical habitats exist for these species in the vicinity of the site.

**Table 3-4. Endangered Species Summary
for the Greater Sioux Falls, South Dakota Area**

Rare and Unique Species	Expected Occurrence
Bush Clover <i>Lespedeza Capitata</i>	Rare in South Dakota; occurs in native, tallgrass prairies
Compass Plant <i>Silphium Laciniatum</i>	Rare in South Dakota; occurs in native, tallgrass prairies
Blanding's Turtle <i>Emydoidea Blandingii</i>	State-threatened species; prefers calm, shallow waters, rich, aquatic vegetation, and sandy uplands for nesting
Federally Endangered Species	
Bald Eagle <i>Haliaeetus Leucocephalus</i>	Winters along the Missouri River
Peregrine Falcon <i>Falco Peregrinus</i>	Regarded as a migrant; usually associated with wetlands and open areas
Eskimo Curlew <i>Numenius Borealis</i>	A species associated with native prairies

Source: U.S. Department of the Interior, Fish and Wildlife Service, South Dakota State Office (1989) South Dakota Department of Game Fish and Parks (1989)

4. FIELD PROGRAM

This section summarizes the field activities conducted at Site 12 - Ramp Area and Site 13 - Motor Vehicle Maintenance Facility (MVMF) at the South Dakota Air National Guard (SDANG) as part of the Site Investigation (SI). The rationale and methods used for the geologic and hydrogeologic investigations, including field screening activities and the disposal of project-derived wastes, are discussed. An explanation of deviations of the field activities from those outlined in the approved SI Work Plan (SAIC 1995) is included. The results of the field activities are presented in Section 5.

4.1 GENERAL APPROACH

Field investigation methods used during the SI included a soil organic vapor (SOV or "soil gas") survey, subsurface soil and groundwater sampling using a hydraulic probe, and installation of piezometers and monitoring wells. Field screening activities were conducted to identify potential contaminant source areas. Local groundwater flow direction was estimated using water level elevations from piezometers installed during the SI. The screening results and groundwater flow direction were evaluated to determine the optimum locations of the monitoring wells. The following approach was used during the SI:

- An SOV survey was conducted at both sites to define potential contaminant source areas. Soil gas samples were collected at 2-foot intervals down to groundwater and screened onsite for total petroleum hydrocarbons (TPH), and benzene, toluene, ethylbenzene, and xylenes (BTEX). At Site 13, soil gas samples also were screened for eight common solvents, including vinyl chloride, chloroform, 1,1,1-trichloroethane, trichloroethene, 1,2-dichloroethene, tetrachloroethene, and carbon tetrachloride.
- At Site 13, 20 groundwater samples were collected using a hydraulic probe and screened in the onsite laboratory for TPH, BTEX, and eight common solvents.
- Soil samples were collected using a hydraulic probe. Two soil samples from each sampling location were selected for offsite laboratory analyses. Samples were chosen based on the screening results from each 2-foot interval. Soils were analyzed for TPH and BTEX; at Site 13, soil samples also were analyzed for eight common solvents.
- At Site 12, five groundwater samples were collected (one from each of the five soil sampling locations). These samples were analyzed at the offsite laboratory for TPH and BTEX.

- Three 2-inch diameter piezometers were installed to a depth of 15 feet below land surface (BLS). Groundwater flow direction was calculated using water level measurements from the piezometers.
- Five 4-inch diameter monitoring wells were installed at Site 12 to 15 feet BLS.
- One 2-inch diameter monitoring well was installed at Site 13 to 20 feet BLS. Groundwater samples were analyzed for TPH, BTEX, and eight common solvents.
- One sample was collected from each monitoring well boring for laboratory geotechnical testing (maximum depth of 15 feet).

4.2 FIELD ACTIVITIES

Field activities conducted as part of the SI at SDANG included an SOV survey, sampling soil and water using a hydraulic probe, onsite screening of samples, piezometer installation, and monitoring well installation and sampling. The following subsections present the methods and procedures for these activities. All field activities were documented in the field logbook (Appendix L). Results of all SI field activities are presented in Section 5.

4.2.1 *Soil Organic Vapor Survey*

An SOV survey was conducted at both sites to identify potential contaminant source areas. An electric hammer was used to core a 2-inch diameter hole through the concrete where necessary to initiate sampling activity. Prior to sampling, the SOV sampling equipment was purged with ambient air filtered through an organic vapor filter cartridge. Interconnected 3-foot lengths of 1-inch diameter steel pipe were then advanced to the appropriate sampling depth using a truck-mounted hydraulic probe. The bottom of the pipe was opened and a small diameter stainless steel probe attached to a length of Teflon® tubing was lowered through the steel casing to the bottom of the hole and screwed into a fitting at the bottom end of the pipe. The attachment to this fitting ensures that the sample comes from the soil at that interval and not from the inside of the steel pipe. In situ soil gas was withdrawn through the probe and used to purge the sampling equipment. A second sample of soil gas was withdrawn through the probe into a pre-evacuated, self sealing, U.S. Environmental Protection Agency (EPA)-approved clean glass vial at a pressure of two atmospheres. The glass vials were then taken to the onsite laboratory for analysis by gas chromatography (GC).

SOV samples were taken at 2-foot intervals, starting at 2 feet BLS, until groundwater was encountered. Samples were started at a depth of 2 feet BLS because of the thickness of the concrete at Site 12 and the asphalt at Site 13. Soil gas samples were collected to a maximum depth of 8 feet BLS. SOV survey results are presented in Appendix A.

4.2.2 Groundwater Field Screening

Groundwater samples at Site 12 were collected for offsite screening of BTEX and TPH (see Section 4.2.4). At Site 13, 20 groundwater samples were collected and screened onsite for BTEX, TPH, and eight common solvents. The truck-mounted hydraulic probe was used to advance interconnected 3-foot lengths of 1.25-inch diameter steel pipe into groundwater. The steel pipe was then replaced with a slotted 0.5-inch diameter polyvinyl chloride (PVC) temporary well point. Groundwater samples were collected with a stainless steel mini-bailer. Two to three 40-mL EPA-clean glass volatile organic analysis (VOA) vials were filled for each sample, depending on the productivity of the well. Samples were analyzed at the onsite laboratory.

4.2.3 Soil Field Screening

Soil samples were collected at Sites 12 and 13 using the hydraulic probe. The sampling team collected samples at 2-foot intervals until groundwater was encountered, according to direction from the Air National Guard Readiness Center (ANG) (see Section 4.6). Soil samples from each sampling interval were screened at the onsite laboratory (TARGET) using the GC. Using data from the screening analyses, two samples were selected from each sampling point, for analysis by the offsite laboratory (Maxim Technologies, Inc., formerly Huntington Engineering and Environmental, Inc.).

Soil samples were collected by hydraulically driving a 1.25-inch-diameter piston-type sampler to the top of the desired sample interval. The piston within the sampler was then removed and the sample corer was advanced to collect a 2-foot core. The soil core was contained in a non-reactive plastic liner. The liner was opened and screened for volatile organic compounds (VOCs) with a photoionization detector (PID). Geologic characteristics were described on boring logs (the boring logs are presented in Appendix B). Soil was removed from the liner and placed in the appropriate sample containers. The samples were placed in a cooler

with ice until they could be analyzed by the onsite laboratory. Two samples from each point were sent to the offsite laboratory. Sample selection was based on the onsite laboratory screening results; samples with the highest concentrations of contaminants were sent to the offsite laboratory for analysis. If contaminants were not detected in any samples from a given location, the first and last sample intervals were sent for offsite laboratory analysis.

4.2.4 Groundwater Screening

Groundwater samples were collected at the same locations as the soil samples at Site 12, with the hydraulic probe. Interconnected 3-foot lengths of 1.25-inch-diameter steel pipe were advanced 5 feet below the groundwater interface to ensure a sufficient supply of groundwater and allow samples to be collected. Once the sampling depth was achieved, the pipe was raised 2 feet to expose the stainless steel screen. Teflon® tubing was inserted down the inside of the pipe to the screened interval. The Teflon® tubing was equipped with a stainless steel bottom check valve. By raising and lowering the tubing at the surface, groundwater was drawn up into the tubing to the surface, approximately 8 feet, where the groundwater was collected directly into the appropriate sample containers. The samples were placed in a cooler with ice and sent to the offsite laboratory for analysis. These samples were analyzed for TPH and BTEX.

4.2.5 Piezometer Installation

The three piezometers were installed using a hollow-stem auger. Continuous-flight hollow-stem augers were operated from a truck-mounted drilling rig. The augers were rotated to advance the boring and lift the formation materials (cuttings) to the surface. After drilling to the target depth of 15 feet BLS with the auger, the piezometers were installed. The piezometers were constructed of 2-inch diameter, flush threaded, schedule 40 PVC casing and screens with a 0.010-inch slot that meet ANG and State of South Dakota well construction standards. Each piezometer was completed with a 10-foot screen installed 2 feet above the water table.

The sand pack surrounding the piezometer extended from 1 foot below the bottom to 1 foot above the top of the piezometer screen. Tremie pipe conveyed properly sized, clean, bagged silica sand to the annulus. A 2-foot bentonite seal was placed above the sand pack. The

remainder of the annulus was filled with cement grout to the surface to prevent the vertical flow of water along the casing.

All piezometers were finished flush with the land surface. The PVC casing was cut 2 to 3 inches BLS and completed with a protective locking cap consisting of a cast-iron valve box assembly. The valve box was placed in the center of the hole. Each piezometer was fitted with a water-tight compression casing cap to prevent surface water infiltration. The piezometer number was clearly marked on each valve box lid and well casing. All piezometer assemblies were secured with keyed-alike brass or stainless steel locks. Construction diagrams for all piezometers are presented in Appendix C.

4.2.6 Monitoring Well Installation

Monitoring wells were installed using a hollow-stem auger. Monitoring wells were constructed of 4-inch inside diameter (ID), flush threaded, schedule 40 PVC casing and 0.010-inch slotted screens that meet ANG and State of South Dakota well construction standards. Monitoring wells were completed to a depth of 15 feet BLS. Each monitoring well was constructed with 2 feet of the 10-foot screen above the water table.

The sand pack surrounding the monitoring well extended from 1 foot below the bottom of the monitoring well screen to 1 foot above the top of the screen. A 2-foot bentonite seal was placed above the sand pack. The annulus above the bentonite seal was filled with cement grout to the surface to prevent the vertical flow of water along the casing.

All monitoring wells were finished flush with the land surface. The casing was cut 2 to 3 inches BLS and installed with a protective locking cap consisting of a cast-iron valve box assembly. The valve box was placed in the center of the hole with the top flush with the ground surface. Each monitoring well was fitted with a water-tight compression casing cap to prevent surface water infiltration. Each monitoring well number was clearly marked on the valve box lid and well casing. All monitoring wells were secured with keyed-alike brass locks. Construction diagrams for monitoring wells are presented in Appendix D.

4.2.7 Monitoring Well Development

The monitoring wells were developed within 24 to 48 hours of installation in accordance with the SI Work Plan (SAIC 1995). This interval allowed sufficient time for the grout to set. Each monitoring well was developed by surging and pumping until well water was clear and free of sand, and until specific conductivity, temperature, and pH measurements had stabilized. A calibrated meter was used to measure the temperature, pH, and specific conductivity. The development water was contained until approval for discharge to the sanitary sewer could be obtained from the city of Sioux Falls Environmental Compliance Manager. Well development forms are provided in Appendix K.

4.2.8 Monitoring Well Sampling

Prior to sampling, all wells were purged a minimum of five well volumes with a stainless steel submersible pump or a disposable polypropylene bailer in accordance with the SI Work Plan (SAIC 1995). Temperature, pH, and specific conductivity were measured at regular intervals as well volumes were removed. When three consecutive measurements were stable, purging was considered complete.

Groundwater samples were collected immediately after purging, using a disposable polypropylene bailer lowered into the well on a nylon rope. The groundwater was dispensed directly from the bailer into sample bottles containing a hydrochloric acid preservative. The samples were immediately placed into a cooler with ice (Appendix F provides the chain-of-custody forms that document the transfer of samples). The bailer and length of rope were disposed of after each sample was collected. The submersible pump and water level indicator were decontaminated in accordance with the SI Work Plan before each use (SAIC 1995). Appendix K provides the field sampling forms that document groundwater sampling activities.

4.3 SI PROGRAM AT SITE 12 - RAMP AREA

The SI program at Site 12 - Ramp Area included an SOV survey, soil sampling using a hydraulic probe, collection of groundwater screening samples, piezometer and monitoring well

installation, and monitoring well sampling. The suspected contaminants at Site 12 included TPH and BTEX. Investigation results for Site 12 are presented in Section 5.1.

4.3.1 SOV Survey

Fifty SOV sampling locations were established at Site 12, as shown in Figure 4-1. Thirty-five points were placed on a grid 300 by 200 feet with a 50-foot spacing between points. This grid encompasses the previously excavated Areas 1 and 2. Some of the grid points had to be relocated in the northeast corner because a water pipe was present at shallow depth beneath Site 12. The city of Sioux Falls confirmed the location of the water line and requested that SOV sampling be conducted at least 20 feet away from the pipe's marked location.

Based on the screening results of the original 35 SOV points, 15 points were added to better define the potential contaminant source areas. Four additional points were located around point GS12-11, where total xylenes were detected (the concentration was below reporting limits). Eleven additional points were located around GS12-19, which was the only other point of the original 35 where contaminants were detected. Additional points were first located 25 feet from GS12-11 and GS12-19. If contaminants were not detected at this position, another sample was taken 12.5 feet from the original location where contaminants were detected. Contaminants were detected west of GS12-19, at grid point GS12-37. One additional sample was collected 12.5 feet to the west of GS12-19. Two samples were taken 25 feet from GS12-37, one to the north and one to the south. Three SOV sampling points were located 50 feet east of GS12-19—one point was located directly east, and the other two were located 25 feet north and south of GS12-19. A buried water line 25 feet east of GS12-19 interfered with SOV sampling at that location.

At each sampling point, three SOV samples (at 2, 4, and 6 feet BLS) were collected. The first sample was collected at a depth of 2 feet BLS due to the thickness of the concrete (8 to 16 inches) and the gravel underneath. Groundwater was encountered at approximately 7 feet BLS, which prevented SOV sampling at depths below the 6-foot interval. The SOV survey results are discussed in their entirety in Appendix A.

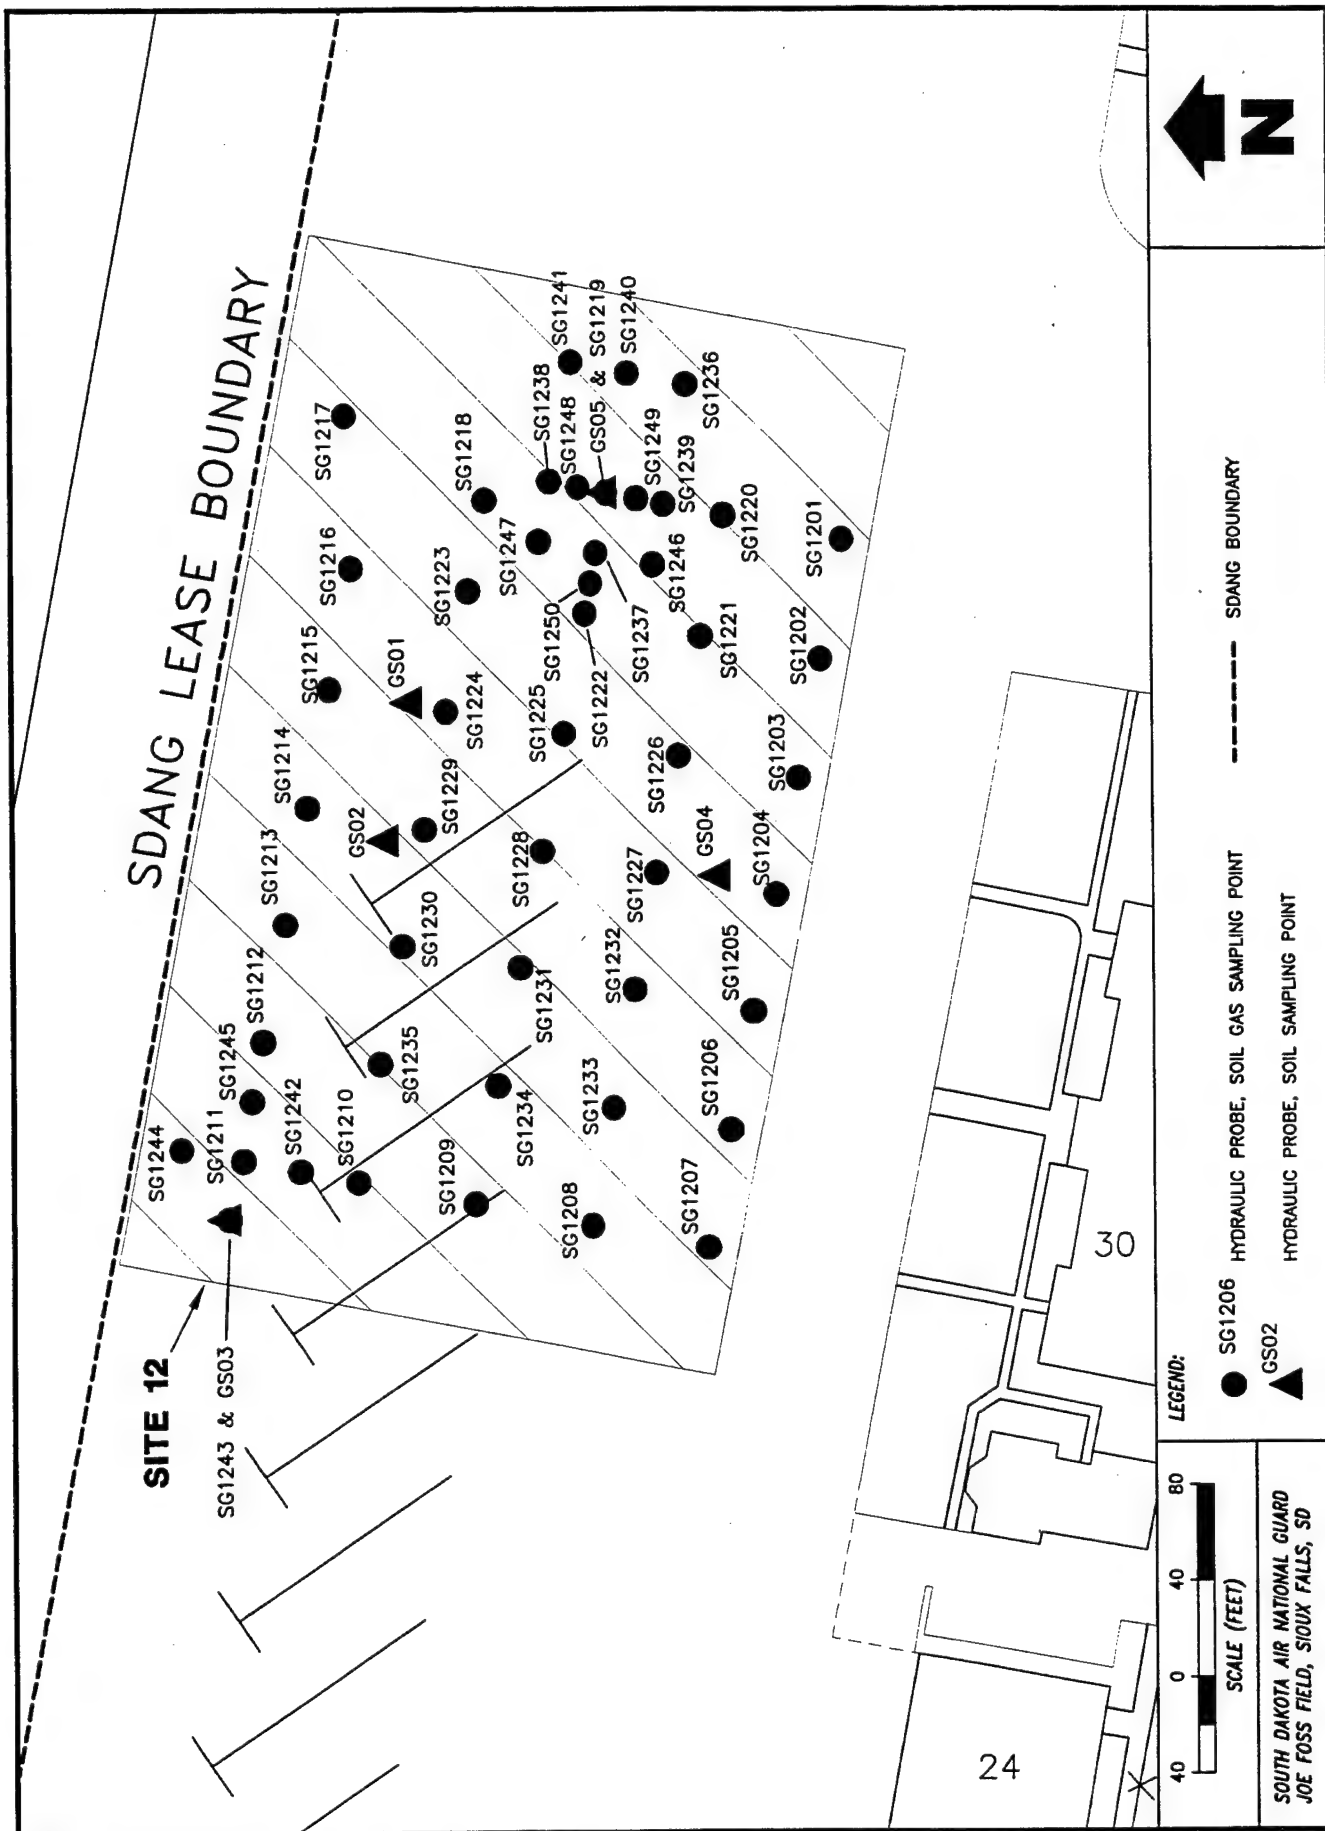


Figure 4-1. Field Screening Sampling Points at Site 12

4.3.2 Soil and Groundwater Screening

Based on the findings of the SOV survey and the historical groundwater flow direction, five soil sampling points were located at Site 12, as shown in Figure 4-2. Soil samples were collected as described above, at 2-foot intervals until groundwater was encountered (2 to 4, 4 to 6, and 6 to 8 feet BLS). The 0- to 2-foot interval sample was not collected because concrete (up to 16 inches thick) and the underlying gravel occupied this entire interval. One soil sample was collected at each interval for screening by the onsite laboratory. The screening data were used to select samples for analyses by the offsite laboratory. Two samples from each of the five locations were sent to the offsite laboratory (10 soil samples total at Site 12). Soil results for Site 12 are presented in Section 5.1 and Appendix A.

Groundwater screening samples were collected for offsite laboratory analysis of BTEX and TPH. Temporary well points were installed at the same five sampling locations used for soils (Figure 4-2). Samples were then collected as described in Section 4.2.4. Five groundwater samples and a duplicate were sent to the offsite laboratory. Site 12 groundwater screening results are presented in Section 5.1.

4.3.3 Piezometer Installation

Three piezometers were installed to provide information on groundwater flow direction. Piezometer PZ-01 is located north of Building 33, north of the ramp and the taxiway. PZ-02 is located northeast of Building 40. PZ-03 is located north of Building 36. The latter two piezometers are in the grassy area between the buildings and the ramp (see Figure 3-6). Groundwater was encountered at approximately 7 feet BLS, which is unusually high compared to groundwater elevations measured in previous months at the city of Sioux Falls production wells. The piezometer boring was drilled to 16 feet BLS. The 10-foot screen was placed between 5 and 15 feet BLS, and the sand pack was placed between 4 and 16 feet. One foot of sand was placed above the screen because of the high water level. A 2-foot bentonite seal, followed by 1 foot of grout, filled the remainder of the annulus in each piezometer. A surface pad and protective cover were installed and clearly marked, as shown in the construction diagrams presented in Appendix C.

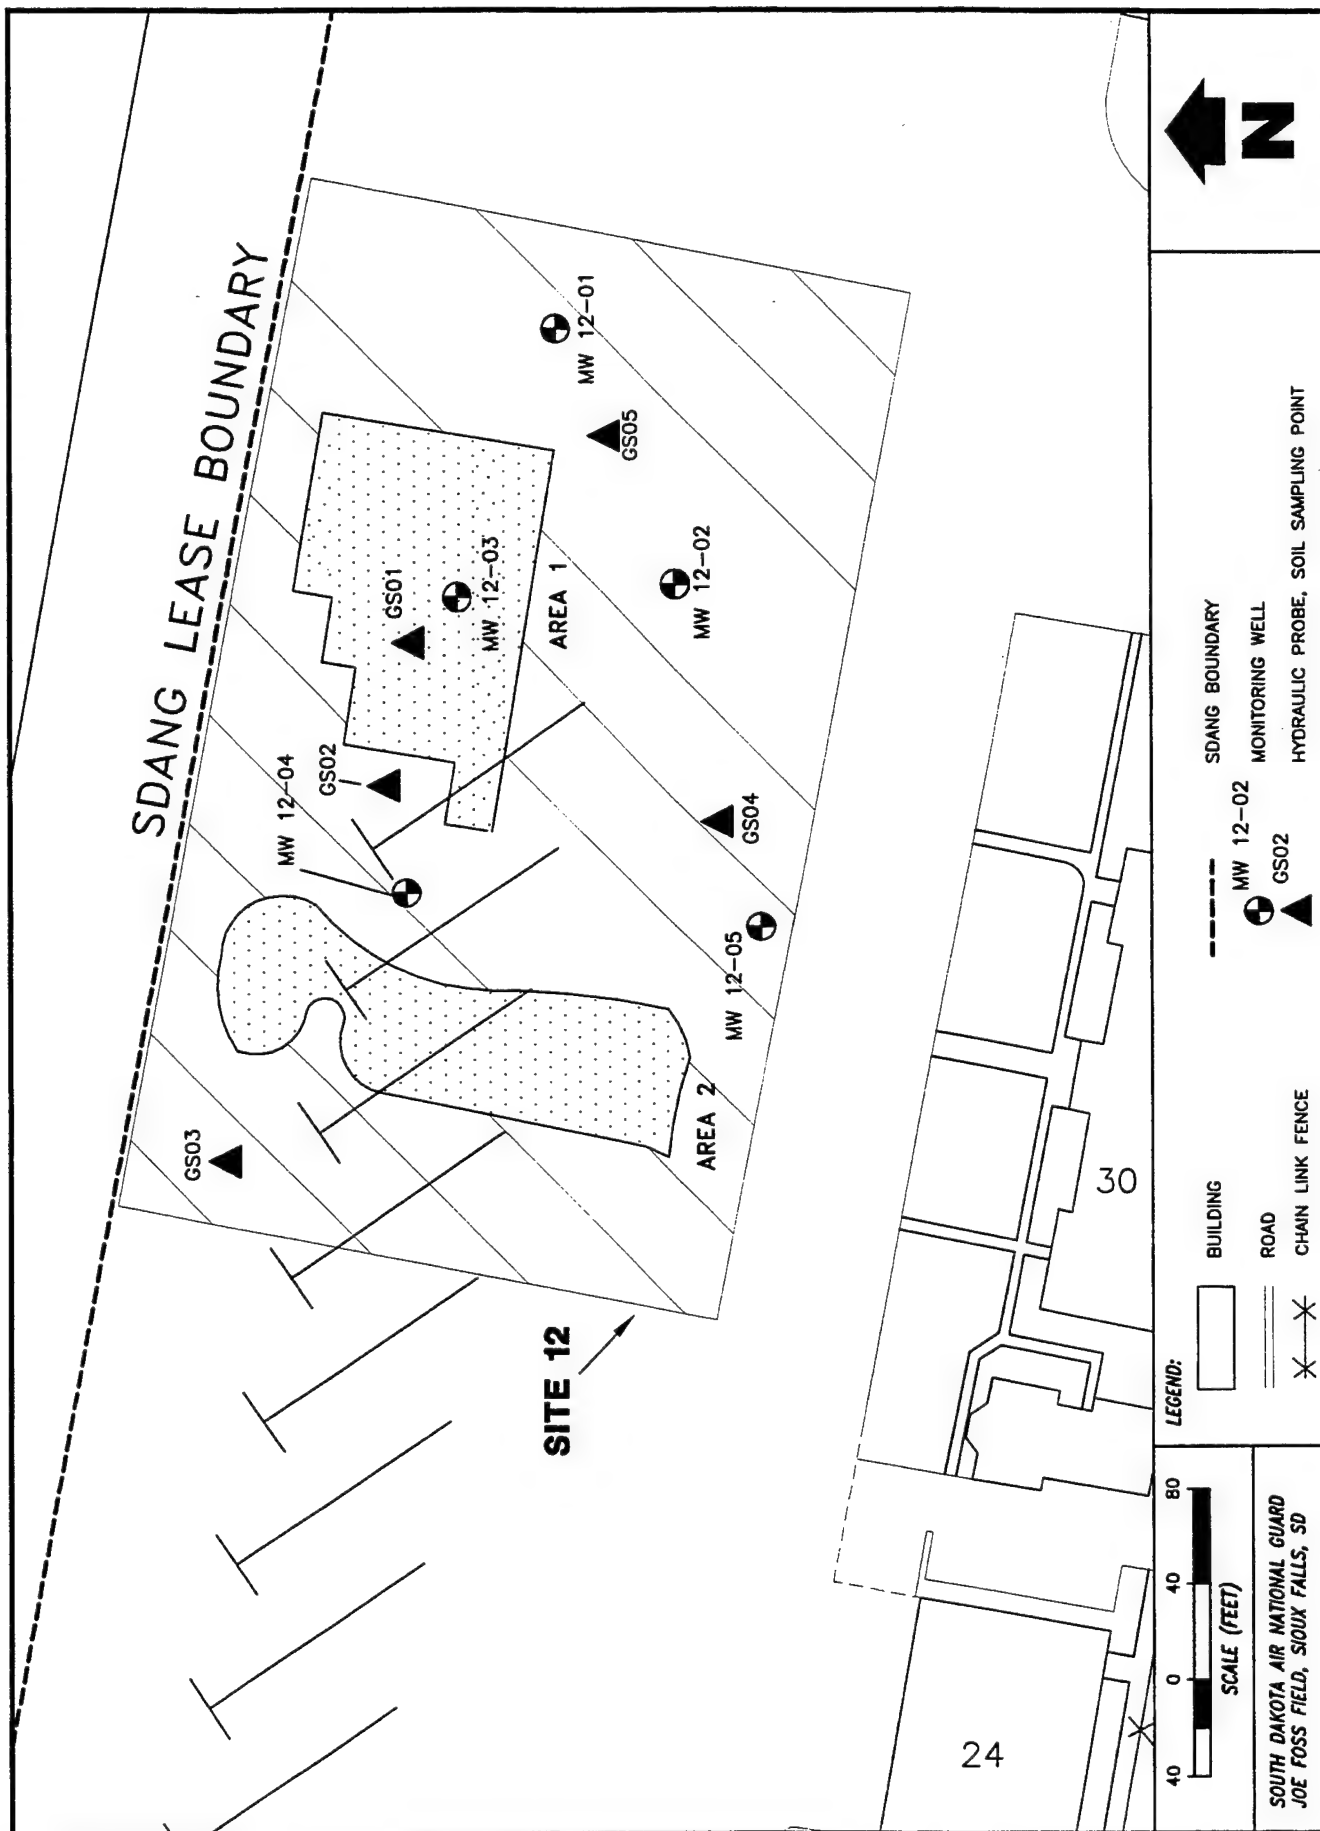


Figure 4-2. Sampling Points at Site 12

Water levels were measured during monitoring well sampling using an electronic sounder. Water level measurements indicate that the groundwater flow direction is to the southwest. Historically, in the vicinity of Site 12, groundwater flow direction has been to the southeast or northwest, possibly induced by pumping at nearby municipal wells. The observed change in flow direction is thought to be the result of the removal of the influence of nearby production wells, since these wells are no longer in use for production.

4.3.4 Monitoring Well Installation and Sampling

Five wells were installed at Site 12, both downgradient and upgradient of the suspected contaminant source areas and the excavated Areas 1 and 2 (see Figure 4-2).

All monitoring wells were installed in the same manner. The boreholes for the wells were drilled to 16 feet BLS. One geotechnical soil sample was collected from each of the monitoring well borings (see Appendix J). The well screen extended from 5 to 15 feet BLS. The sand pack extended from 4 to 16 feet BLS. As with the piezometers, the bentonite seal was placed from 2 to 4 feet BLS and the grout was placed from 1 to 2 feet BLS. Well completion diagrams are presented in Appendix D.

Well development and purging was conducted as described in Section 4.2.8. Five groundwater samples were collected at Site 12 according to the procedures described in Section 4.2.

4.4 SI PROGRAM AT SITE 13 - MVMF

The SI program at Site 13 - MVMF included an SOV survey, soil and groundwater sampling using a hydraulic probe, monitoring well installation, and groundwater sampling. The suspected contaminants at Site 13 included TPH, BTEX, and eight common solvents, including vinyl chloride, chloroform, 1,1,1-trichloroethane, trichloroethene, 1,2-dichloroethene, tetrachloroethene, and carbon tetrachloride. The investigation results for Site 13 are presented in Section 5.2.

4.4.1 SOV Survey

Six SOV survey locations were established at Site 13, as shown in Figure 4-3. Four samples were collected at each point: one each at 2, 4, 6, and 8 feet BLS. Groundwater was encountered at approximately the 8-foot interval, which prevented SOV sampling beyond this depth. Four SOV points were arranged around the pump island (one each to the north, south, east, and west). A fifth survey point was located above the underground fuel lines that supply the pumps. A sixth survey point was located between the protective posts on the south side of the island, where odors were first discovered by construction workers digging the post holes. The SOV survey results are discussed in their entirety in Appendix A.

4.4.2 Groundwater Screening

Twenty groundwater screening samples were collected and analyzed by the onsite laboratory for TPH, BTEX, and solvents. Groundwater sampling locations were established using a 10-foot grid system around the pump island and fuel lines, as shown in Figure 4-3. The hydraulic probe was used to insert a temporary well point whereby groundwater could be sampled. The groundwater analyses results at Site 13 are discussed in Section 5.2.3 and presented in Appendix A.

4.4.3 Soil Screening

Based on the results of the SOV and groundwater survey, four soil sampling locations were chosen at Site 13, as shown in Figure 4-4. At each point, samples were collected at four depths: 3 feet, 3 to 5 feet, 5 to 7 feet, and 7 to 9 feet BLS. Groundwater was encountered at approximately 9 feet BLS in this area. Samples were not collected below the water table. Two sets of samples were collected: one for the onsite laboratory and one for the offsite laboratory. After the screening sample was analyzed by the onsite laboratory, two samples per location were selected for offsite analysis. Samples with the highest concentrations of contaminants at every location were analyzed by the offsite laboratory. If the screening samples did not exhibit contamination, the first and last sample intervals were sent for offsite laboratory analyses. A minimum of two samples per location (a total of eight samples) were sent for offsite analysis from Site 13. The soil analyses results are discussed in Section 5.2.2.

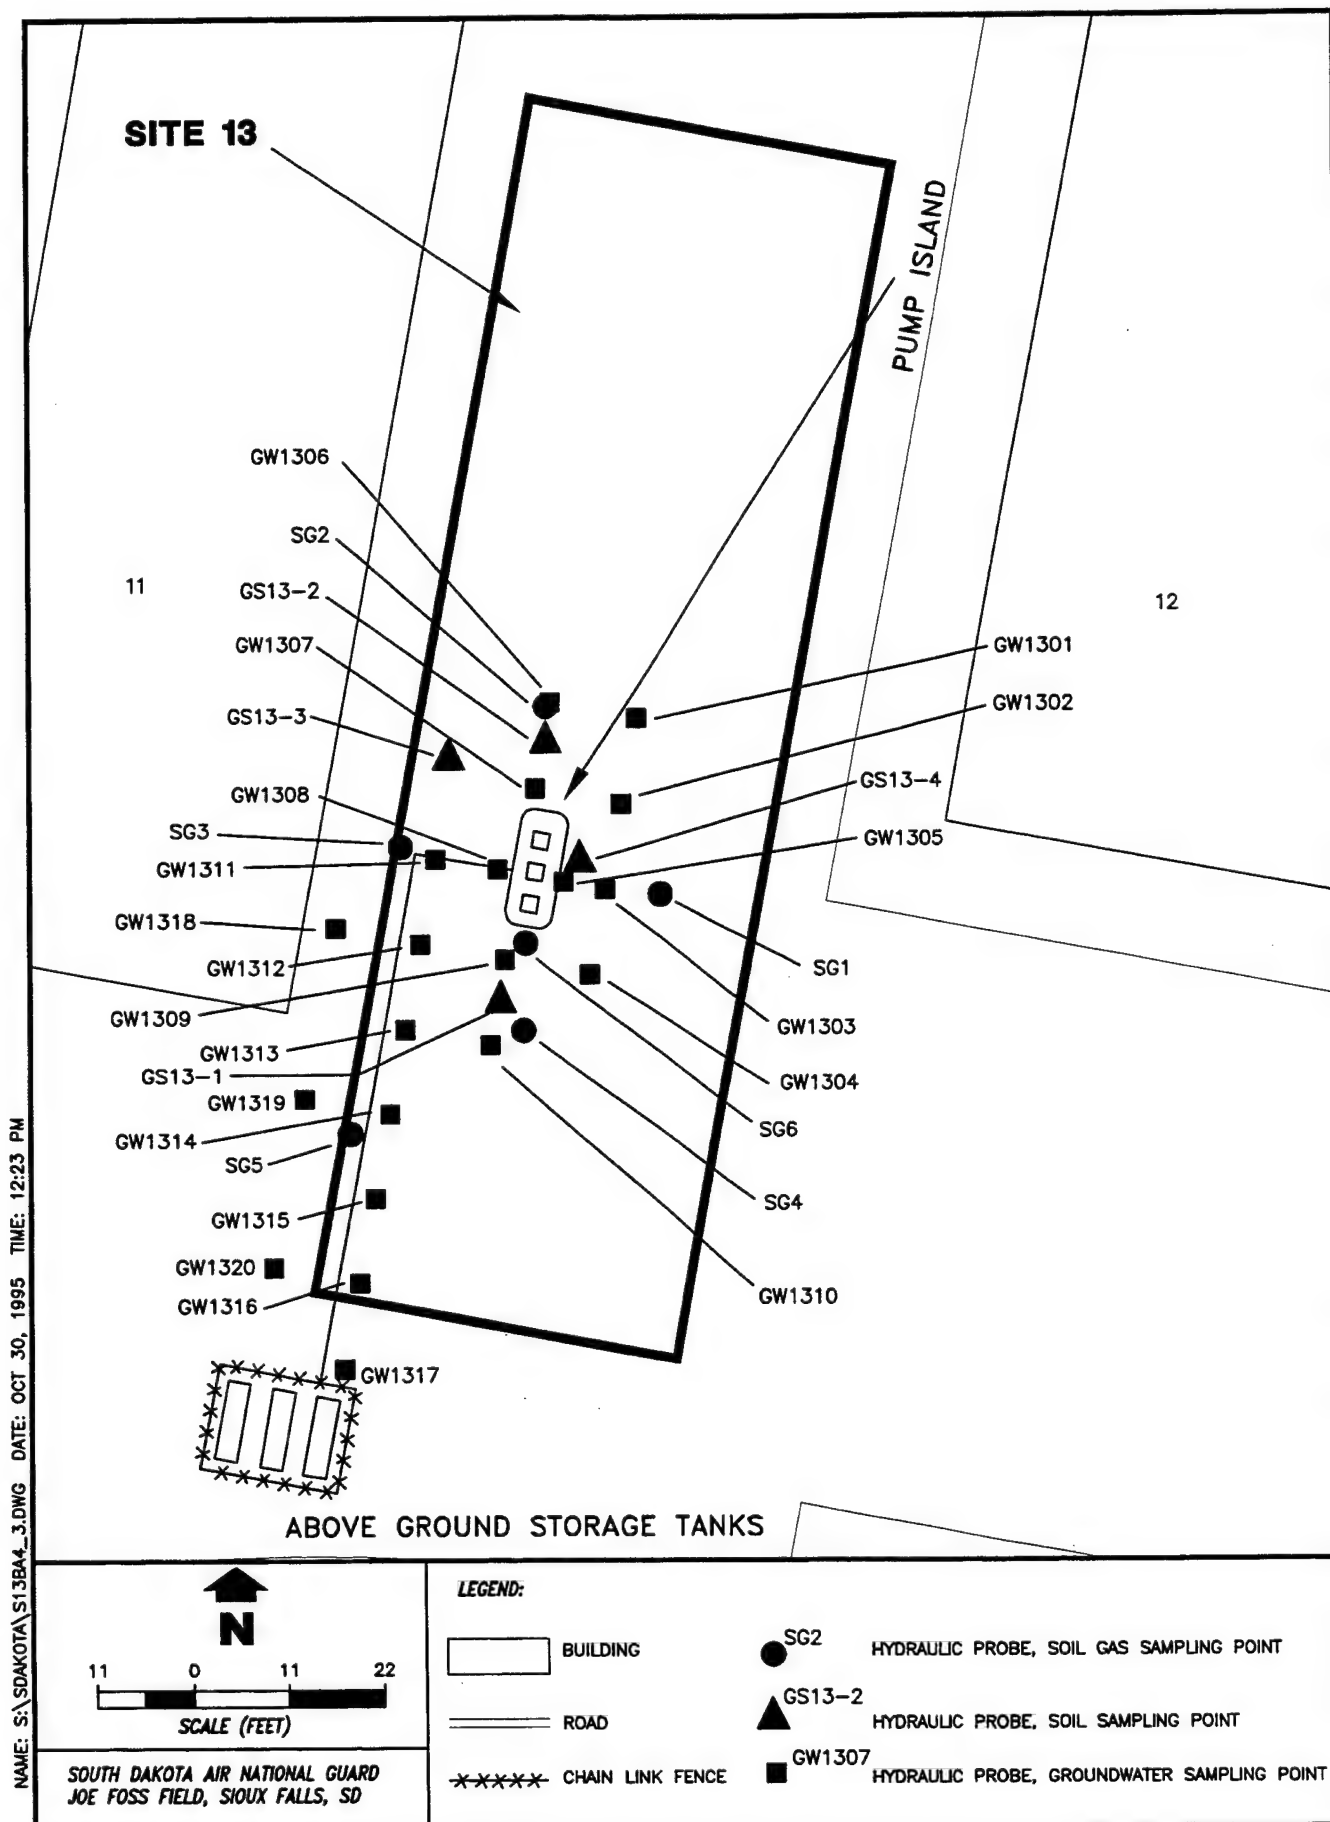


Figure 4-3. Field Screening Sampling Points at Site 13

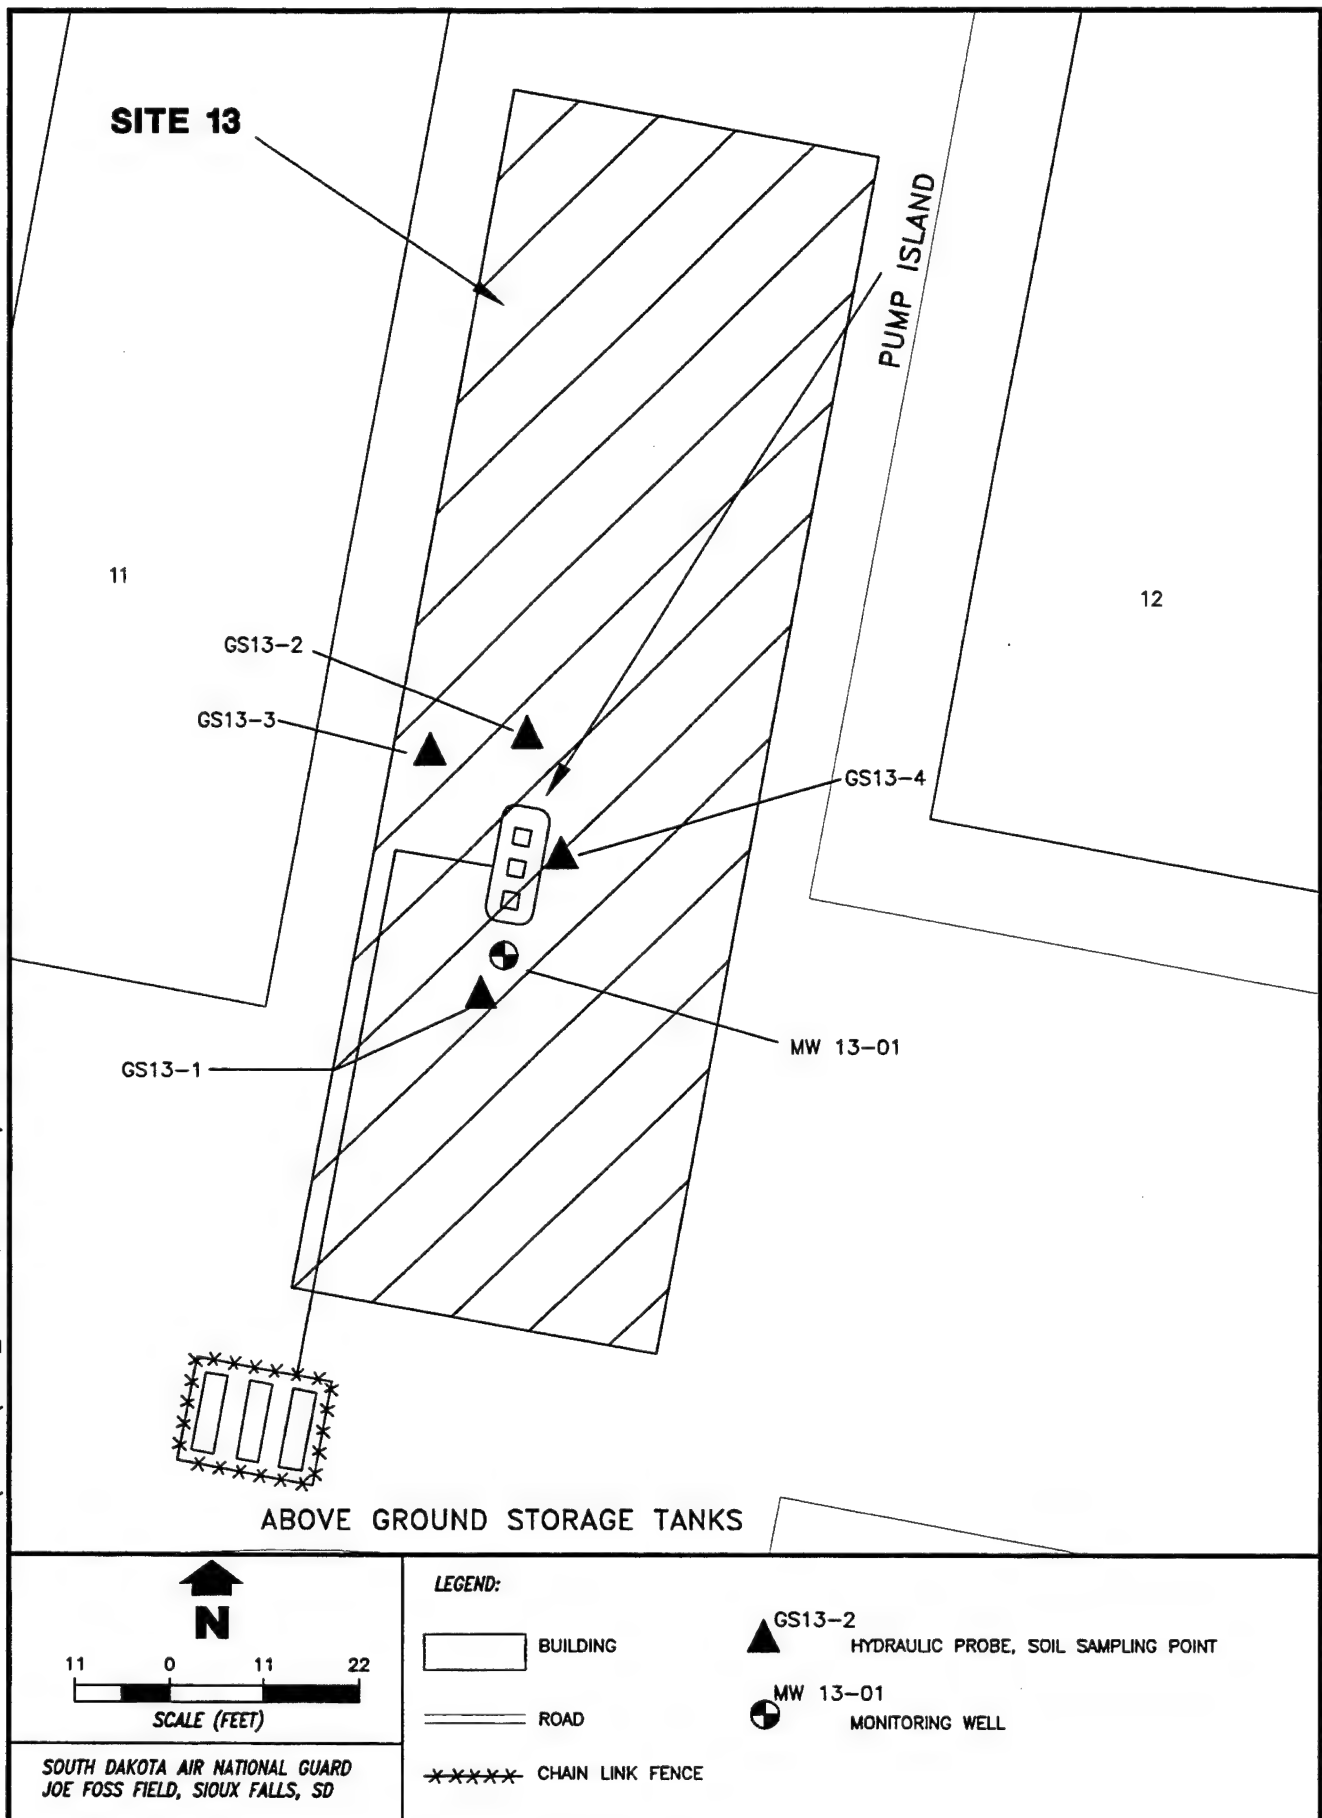


Figure 4-4. Sampling Points at Site 13

4.4.4 Monitoring Well Installation

One 2-inch PVC monitoring well was installed at Site 13, downgradient (southwestward) from the suspected contaminant source area. The hydraulic gradient at Site 13 is assumed to be similar to that observed at Site 12, based on the similarities in topography, geology, and the short distance between the two sites. Monitoring well MW1-13 was located at the south end of the pump island between the two protective posts, as Figure 4-4 shows. Groundwater flow is to the southwest, and MW13-1 was placed to intercept any contamination migrating from the south end of the pump island. The well boring was drilled to 20 feet BLS and completed as shown in Appendix D. A geotechnical soil sample was collected from the well boring. The geotechnical data are presented in Appendix J.

4.4.5 Monitoring Well Sampling

Well development and purging proceeded as described in Section 4.2. One groundwater sample and one duplicate sample were collected from well MW13-1.

4.5 INVESTIGATION-DERIVED WASTE HANDLING

Investigation-derived waste (IDW) for the SI at Sites 12 and 13 were handled and disposed of in accordance with state and local regulations by the SDANG Base Office of Civil Engineering.

SDANG received permission from the Utilities Department's Environmental Compliance Manager to discharge well development water into the city of Sioux Falls sanitary sewer. The conditions of the approval were as follows; 1) the volume shall not exceed 2,500 gallons, 2) the water must be placed in a container and monitored before it is discharged, 3) the wastewater must be discharged into a designated manhole, and 4) the wastes must be discharged on July 17 and 18, 1995 (see Appendix H). Approximately 1,100 gallons were discharged to the sanitary sewer. The water was pumped from the wells into a tank; no sheen was visible and the PID did not detect VOCs in the water. Well development water was discharged into the designated manhole on the dates specified.

Nineteen drums of soil cuttings were generated during piezometer and monitoring well installation. These drums were staged behind Building 47 on the blacktop parking area. The disposition of these drums was completed on August 31, 1995, following review of the soil sample analyses results. All drums were labeled to define the contents, soil borings from which the cuttings originated, and dates filled. Soil cuttings were disposed of along the airport perimeter road south of Building 10.

4.6 DEVIATIONS FROM WORK PLAN

Deviations from the approved SI Work Plan (SAIC 1995) resulted in minor impacts to the scope and method of accomplishing the field program. No deviation had an impact on defining the nature and extent of contamination at Sites 12 and 13, or on data quality. All deviations were documented on field change order forms for approval by ANG (see Appendix M).

The approved SI Work Plan (SAIC 1995) specified 300 SOV samples at Site 12 and 25 SOV samples at Site 13. Because groundwater was present at depths of 7 and 9 feet BLS at Sites 12 and 13, respectively, SOV samples could not be collected at all of the proposed depth intervals. At Site 12, 152 SOV samples were collected and 24 SOV samples were collected at Site 13.

At the request of ANG, five hydraulic probe sampling points were sampled at Site 12 instead of the eight points proposed in the SI Work Plan (SAIC 1995).

At Site 12, five 4-inch monitoring wells were installed. The SI Work Plan (SAIC 1995) specified four wells in this area. This change was made at the request of ANGRC to better characterize the nature and extent of contamination at the site. Two 2-inch monitoring wells were specified in the SI Work Plan for Site 13 (SAIC 1995). Only one well was installed at the request of ANG. This decision was based on SOV and field screening results in which no major contamination was detected at the site.

Monitoring wells were completed at 15 feet BLS because of high groundwater levels instead of the proposed depth of 25 feet specified in the SI Work Plan (SAIC 1995). This change was made at the request of ANG. A related change was the completion of monitoring wells and piezometers with the sand pack extending 1 foot instead of 2 feet above the screen. This modification was made when shallower wells and piezometers were requested.

All monitoring wells were sampled using disposable polypropylene bailers rather than the reusable stainless steel bailers specified in the SI Work Plan (SAIC 1995). This change resulted in reducing the volume of decontamination fluids to be disposed of, and reduced the potential for cross-contamination of wells using incompletely decontaminated bailers.

THIS PAGE WAS INTENTIONALLY LEFT BLANK

5. SITE INVESTIGATION RESULTS

This section presents the results of the Site Investigation (SI) at Site 12 - Ramp Area and Site 13 - Motor Vehicle Maintenance Facility (MVMF). All data presented in this section have been validated according to U.S. Environmental Protection Agency (EPA) guidance and the Quality Assurance Project Plan (QAPP) prepared for this SI. This includes the field screening data and laboratory data for soil and groundwater samples. Soil and groundwater screening data were collected in order to identify the optimum locations for monitoring wells, and are not comparable in quality to the data from the environmental and quality control (QC) samples. Both field and laboratory analytical data have been evaluated for precision, accuracy, representativeness, comparability, and completeness (PARCC). Analytical results from the offsite laboratory (Maxim Technologies, Inc.) are provided in Appendix E. The quality of these data is considered acceptable for the purposes of this investigation. The data quality assessment is presented in Appendix J.

5.1 SITE 12 - RAMP AREA RESULTS

5.1.1 Screening Activity Results

The results of the soil organic vapor (SOV) survey and hydraulic probe activities are contained in Appendix A. The screening data indicated contamination in subsurface soils east of Area 1. Groundwater screening samples did not exhibit contamination with either benzene, toluene, ethylbenzene, and xylenes (BTEX) or total petroleum hydrocarbons (TPH).

5.1.1.1 SOV Survey

TPH, ethylbenzene, and xylenes were detected in soil gas samples immediately east of Area 1. The maximum concentrations of these analytes were 391.7 micrograms per liter-volume ($\mu\text{g/L-v}$) TPH (4 feet BLS), and 59.2 $\mu\text{g/L-v}$ xylenes (4 feet BLS). These maximum concentrations were all located at SOV point 19, approximately 50 feet due east of the Area 1 boundary, as shown in Figure 5-1. The maximum concentration of 19.37 $\mu\text{g/L-v}$ ethylbenzene (2 feet BLS) was located at SOV point 50, approximately 12.5 feet due east of the Area 1 boundary. TPH and xylene contamination in soils, indicated by soil gas results, appears to be most widespread in the 6-foot sampling interval. No contaminants of interest were detected in

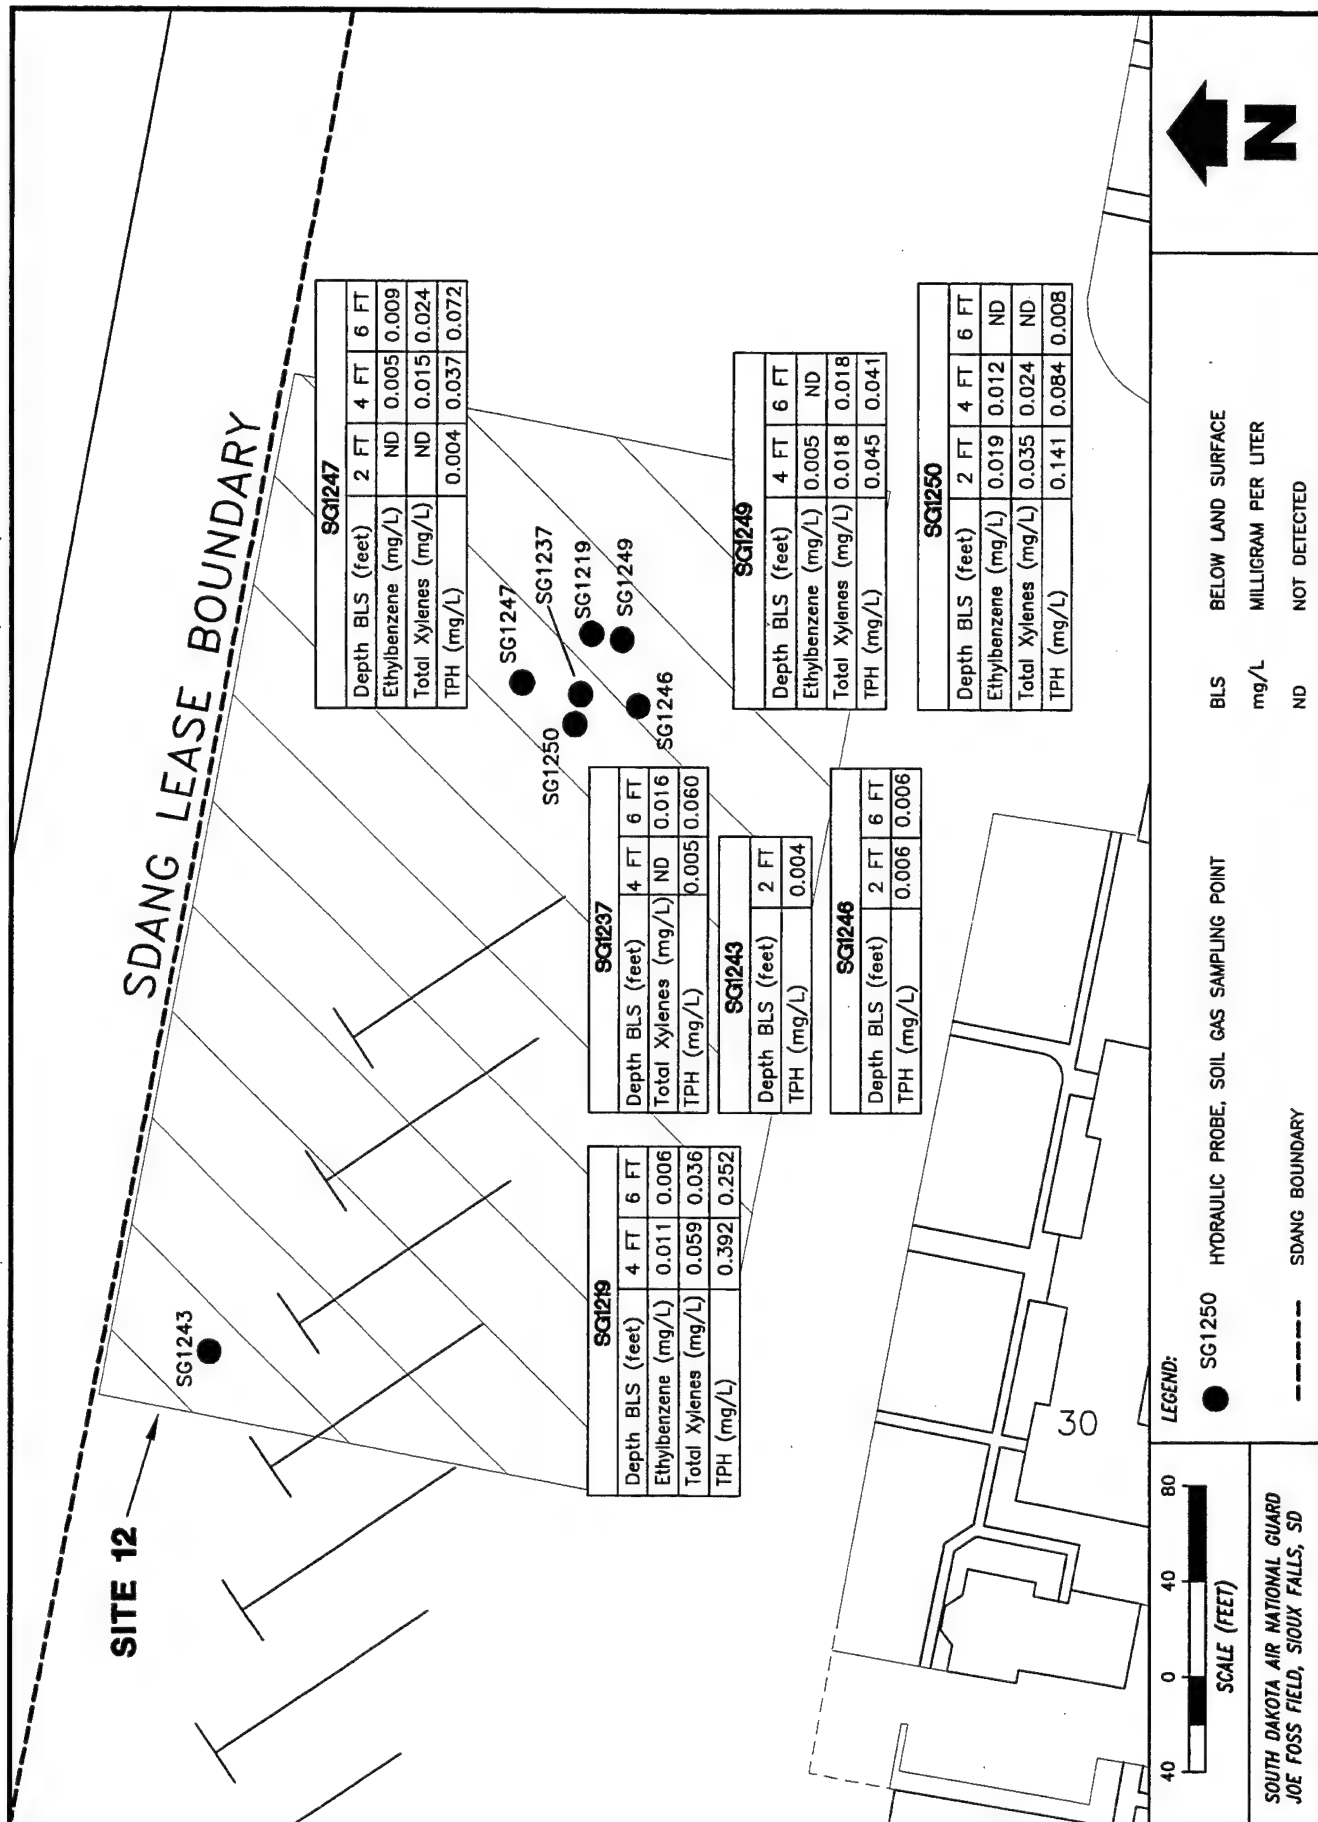


Figure 5-1. Summary of Site 12 Soil Gas Field Screening Results

the SOV samples located east of the buried water line that lies to the east of Area 1. No detectable amounts of the contaminants of interest were found during the SOV survey in the sampling locations to the north, south, or west of Area 1. Table 5-1 (page 5-4) summarizes the results of the SOV survey at Site 12.

5.1.1.2 Soil Screening

Five sampling locations at Site 12 were screened for TPH and BTEX. BTEX compounds were not detected in any of the samples. TPH was detected at GS05, in both the 4- and 6-foot intervals, at 5 and 10 mg/kg, respectively, as shown in Figure 5-2. TPH also was detected in the 2-foot interval at GS03, at 10 mg/kg. Table 5-2 summarizes the soil field screening results for Site 12.

Table 5-2. Site 12 Soil Field Screening* Summary of Results

Parameter	Detection Limit	GS03-1 (2-4 ft)	GS05-2 (4-6 ft)	GS05-3 (6-8 ft)
Benzene	0.1 mg/kg	ND	ND	ND
Toluene	0.1 mg/kg	ND	ND	ND
Ethylbenzene	0.1 mg/kg	ND	ND	ND
Total Xylenes	0.1 mg/kg	ND	ND	ND
TPH	5 mg/kg	10	5	10

* Analyzed by onsite laboratory.

Note: Refer to Figure 5-2 for sample locations.

5.1.1.3 Groundwater Screening

Groundwater screening was conducted at Site 12 at the same locations as the soil screening sampling points. Samples were collected using the manual positive displacement method described in Section 4. The samples were sent to the offsite laboratory for BTEX and TPH analyses. TPH as gasoline was detected at 70 µg/L in GW12-6, a duplicate of GW12-5, but not in GW12-5. No other contaminants were detected.

Table 5-1. Site 12 Soil Organic Vapor Survey Summary of Results

Parameters	Detection Limit	SG12 19-2	SG12 19-3	SG12 37-2	SG12 37-3	SG12 43-1	SG12 46-1	SG12 46-3	SG12 47-1	SG12 47-2	SG12 47-3	SG12 49-2	SG12 49-3	SG12 50-1	SG12 50-2	SG12 50-3
Benzene	4.00µg/L of Air	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Toluene	4.00µg/L of Air	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
Ethylbenzene	4.00µg/L of Air	10.56	6.36	ND	ND	ND	ND	ND	ND	5.0	8.94	4.69	ND	19.37	11.79	ND
Total Xylenes	4.00µg/L of Air	59.20	36.00	ND	16.17	ND	ND	ND	ND	14.7	24.10	18.16	17.69	34.86	23.63	ND
TPH	4.00µg/L of Air	391.73	251.93	5.03	60.26	4.07	6.34	6.20	3.84	37.2	71.99	44.60	40.71	141.16	83.70	8.42

Refer to Figure 5-1 for sample locations.

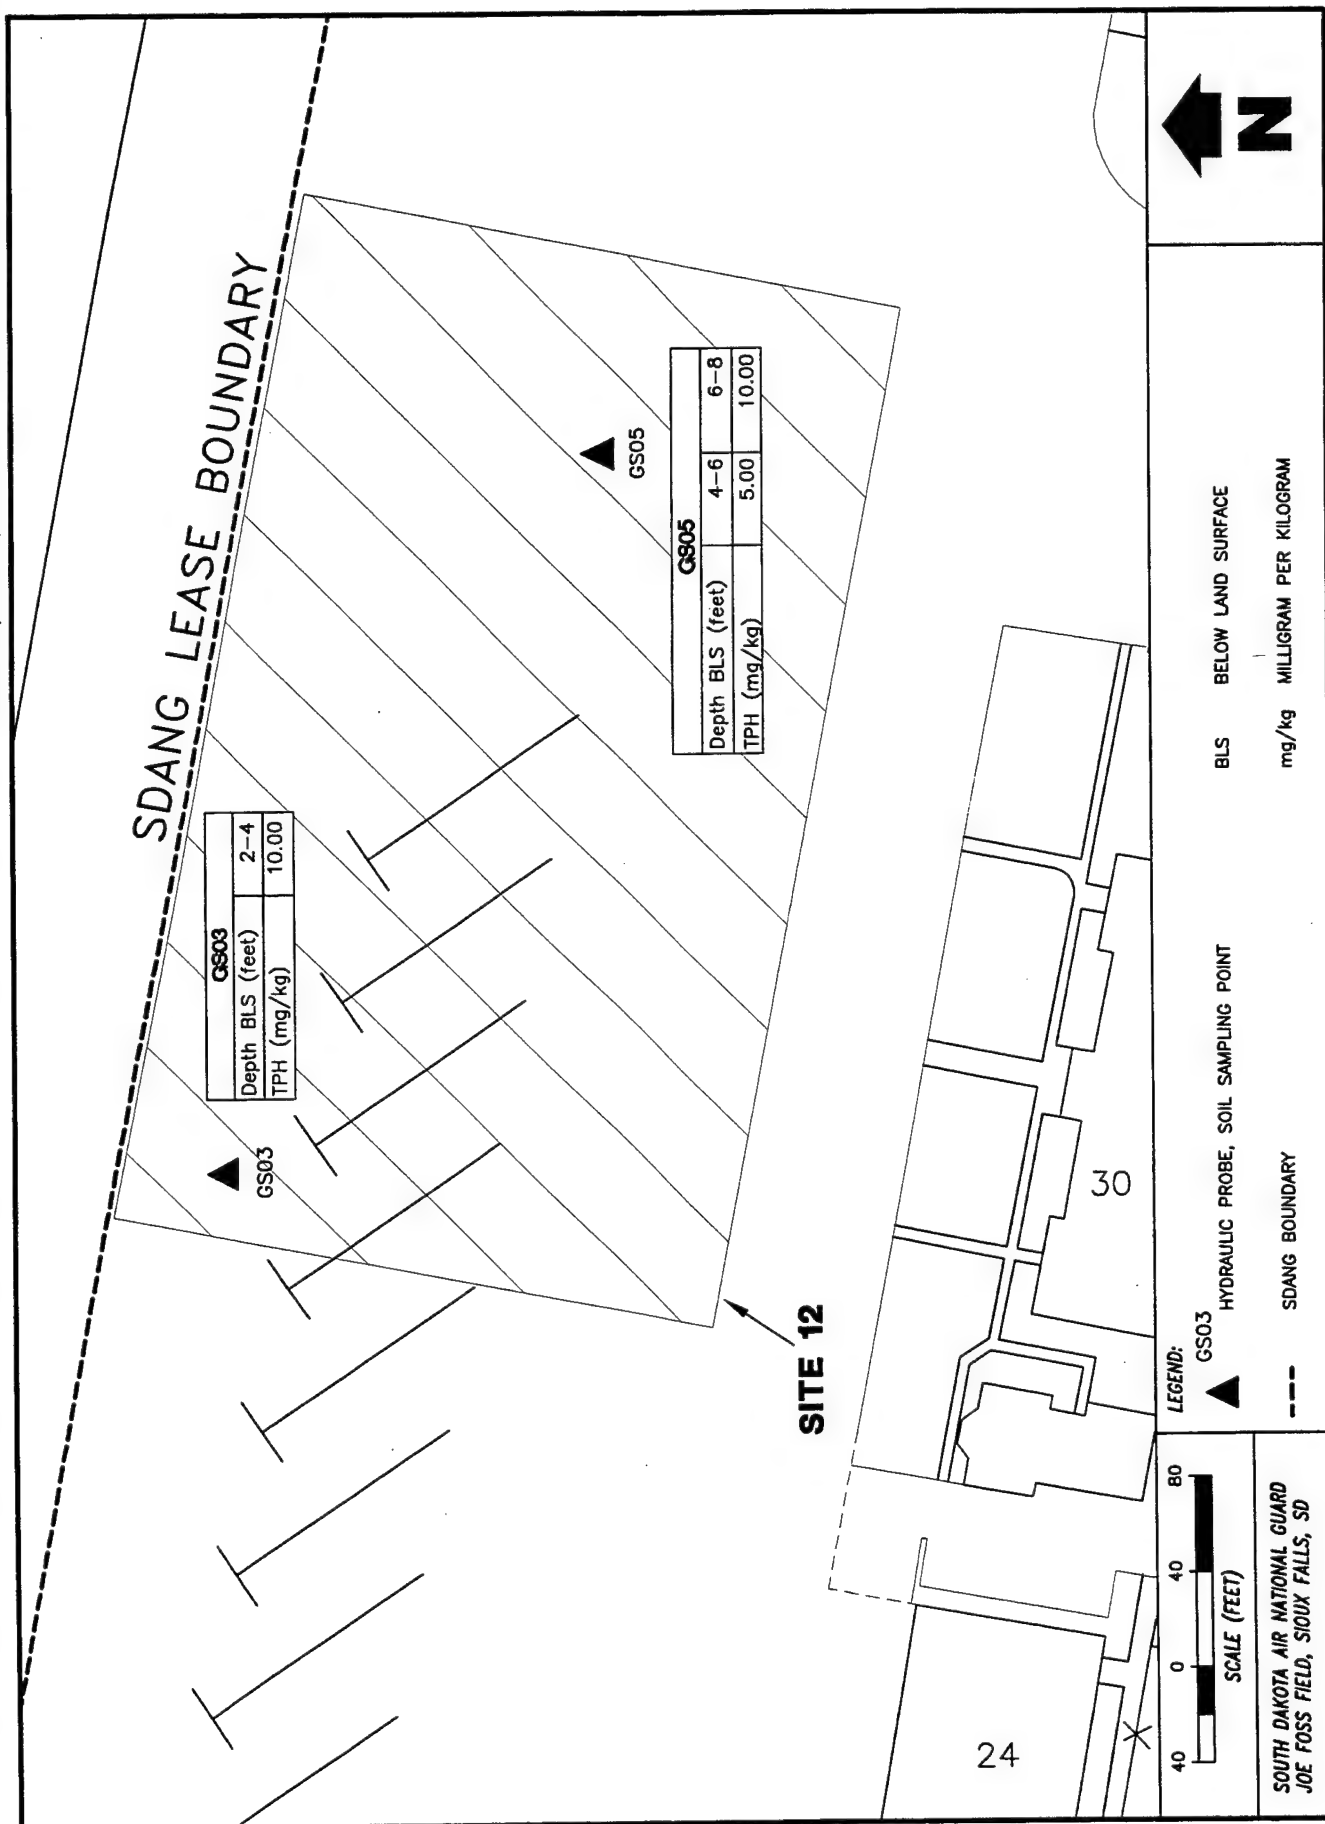


Figure 5-2. Summary of Site 12 Soil Field Screening Results

5.1.2 Soils

Subsurface soil samples were collected at five locations at Site 12 for offsite laboratory analyses of BTEX and TPH. TPH as gasoline was detected in samples GS05-3 (6 to 8 feet BLS) and GS06-2 (4 to 6 feet BLS, a duplicate of GS05), at concentrations of 94 and 10 $\mu\text{g/kg}$, respectively, as shown in Figure 5-3. Both of these measurements indicated higher boiling-point hydrocarbons that are not typical of gasoline. The sampling location is the easternmost of the five points. No other TPH or BTEX compounds were detected in soil samples at Site 12. Table 5-3 summarizes the concentrations of TPH and BTEX detected in the soil at Site 12.

Table 5-3. Site 12 Soil* Summary of Results

Parameter	MDL	GS05-3 (6-8 ft BLS)
Benzene	1 $\mu\text{g/kg}$	ND
Toluene	1 $\mu\text{g/kg}$	ND
Ethylbenzene	1 $\mu\text{g/kg}$	ND
Total Xylenes	1 $\mu\text{g/kg}$	ND
TPH	7 $\mu\text{g/kg}$	94 $\mu\text{g/kg}$ (0.094 ppm)

* Analyzed by offsite laboratory.

MDL - Method Detection Limit.

Note: Refer to Figure 5-3 for sample locations.

5.1.3 Groundwater

Groundwater samples were collected from the five monitoring wells installed at Site 12 (MW12-1, MW12-2, MW12-3, MW12-4, and MW12-5). Samples were analyzed for BTEX and TPH. TPH as gasoline was detected at MW12-1 at concentrations of 81 $\mu\text{g/L}$, and 340 $\mu\text{g/L}$ as shown in Figure 5-3. TPH or BTEX were not detected in any other groundwater sample. Table 5-4 summarizes these results.

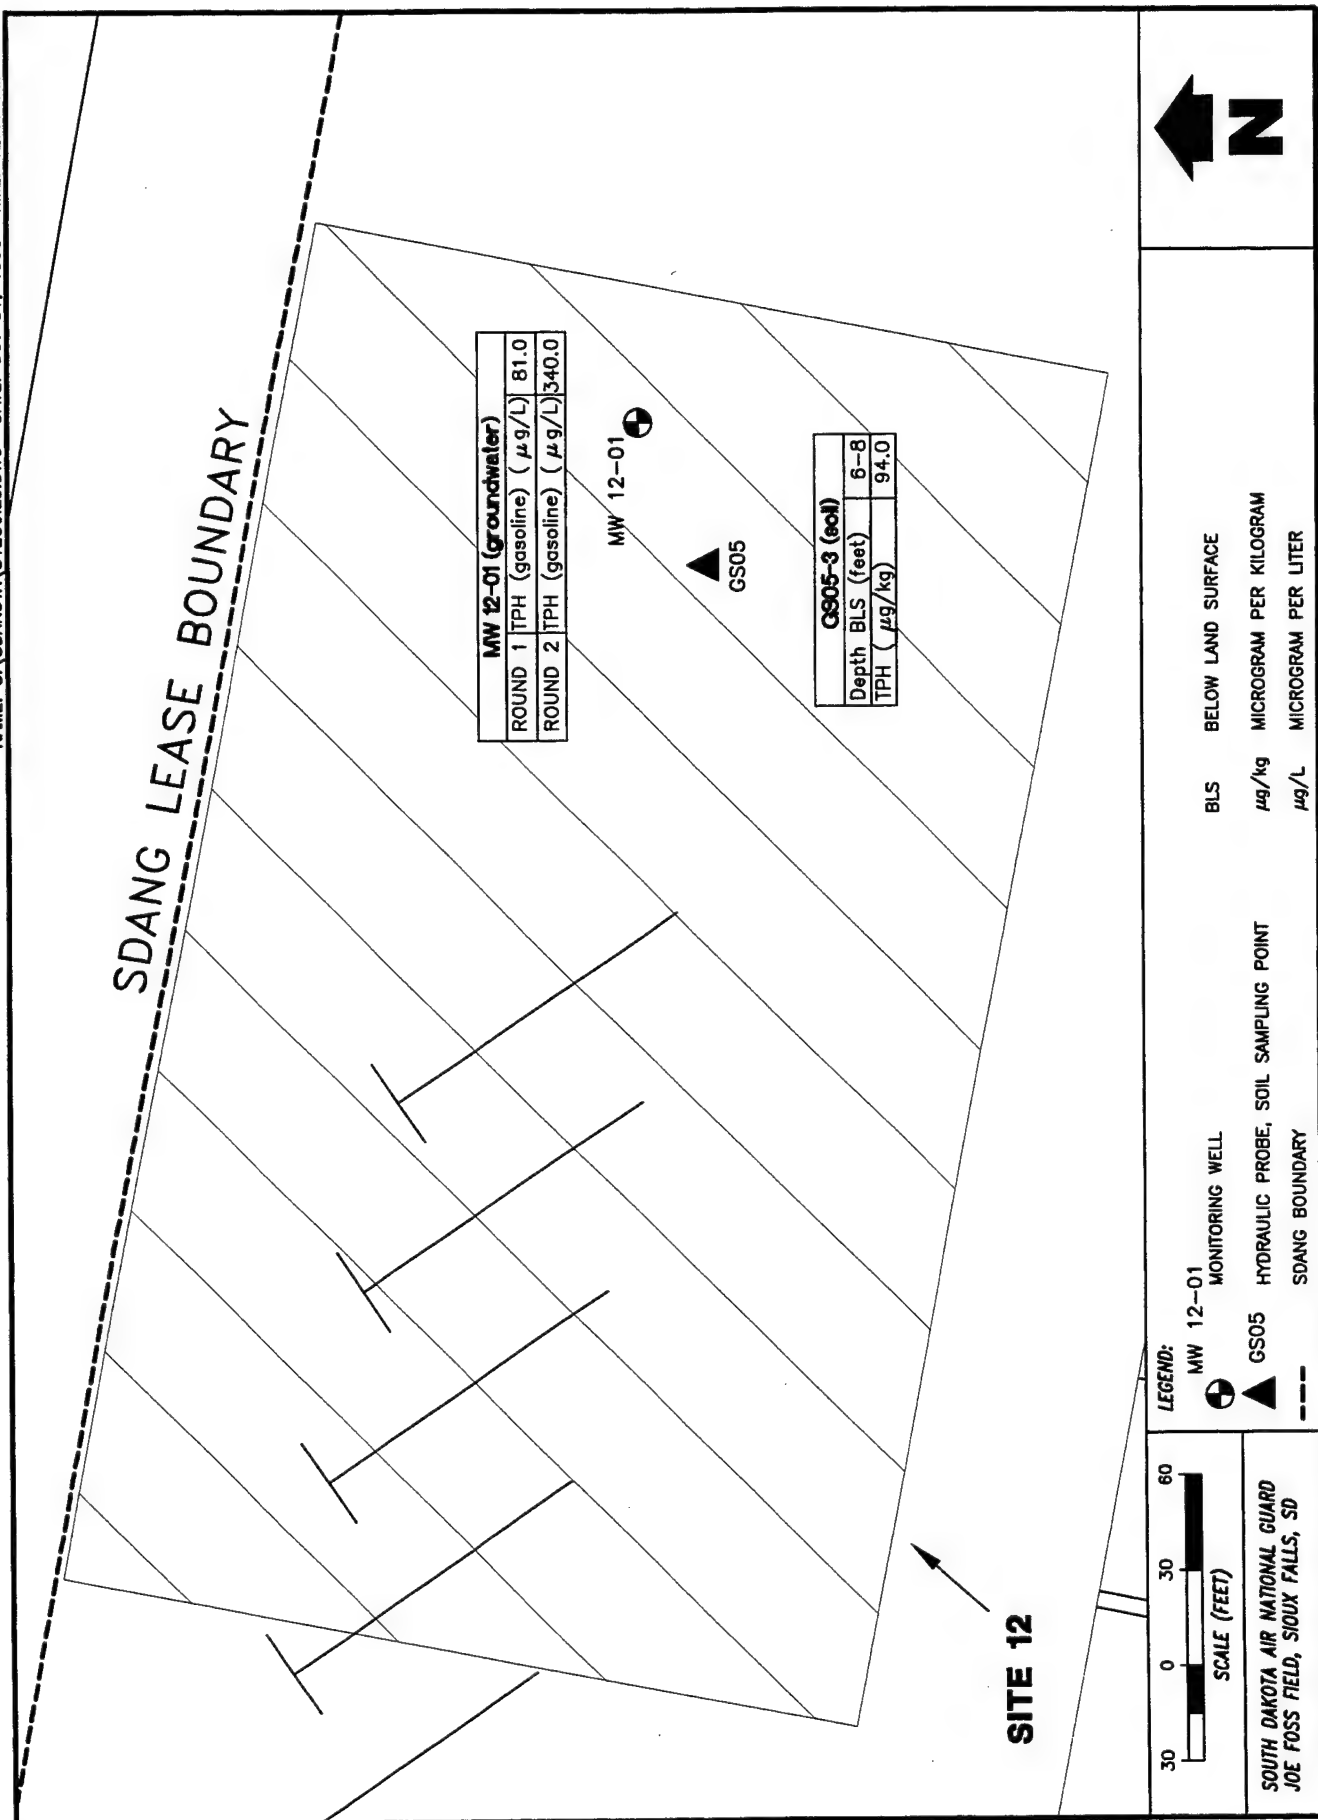


Figure 5-3. Summary of Site 12 Soil and Groundwater Results

Table 5-4. Site 12 Groundwater* Summary of Results

Parameter	MDL	MCL	MW12-1	MW12-2
Benzene	1 µg/L	5 µg/L	ND	ND
Toluene	1 µg/L	1000 µg/L	ND	ND
Ethylbenzene	1 µg/L	700 µg/L	ND	ND
Total Xylenes	1 µg/L	10000 µg/L	ND	ND
TPH (Gasoline) ¹	7 µg/L	100 µg/L	81	340
TPH (No. 2 Fuel Oil) ¹	100 µg/L	100 µg/L	ND	ND

* Analyzed by offsite laboratory.

MCL- Maximum Contaminant Level

MDL- Method Detection Limit.

¹South Dakota standard for wellhead protection areas.

Note: Refer to Figure 5-3 for sample locations.

5.2 SITE 13 - MVMF RESULTS

5.2.1 Screening Activity Results

Results of the screening activities conducted at Site 13 are reported in Appendix A.

5.2.1.1 SOV Survey

BTEX compounds and TPH (see Appendix A) were not detected in soil gas samples collected at Site 13.

5.2.1.2 Soil Screening

BTEX, TPH, and solvents were not detected in soil samples collected at Site 13.

5.2.1.3 Groundwater Screening

Contaminants at Site 13 were detected immediately surrounding the pump island. BTEX were detected at GW1305, approximately 9 feet due east of the pump island. The maximum concentration of any compound was 20.8 µg/L of toluene. Toluene and xylene also were detected at GW1308, immediately west of the pump island, and GW1307, immediately north of the island, as shown in Figure 5-4 and Table 5-5. VOCs and TPH were not detected in any other groundwater sample.

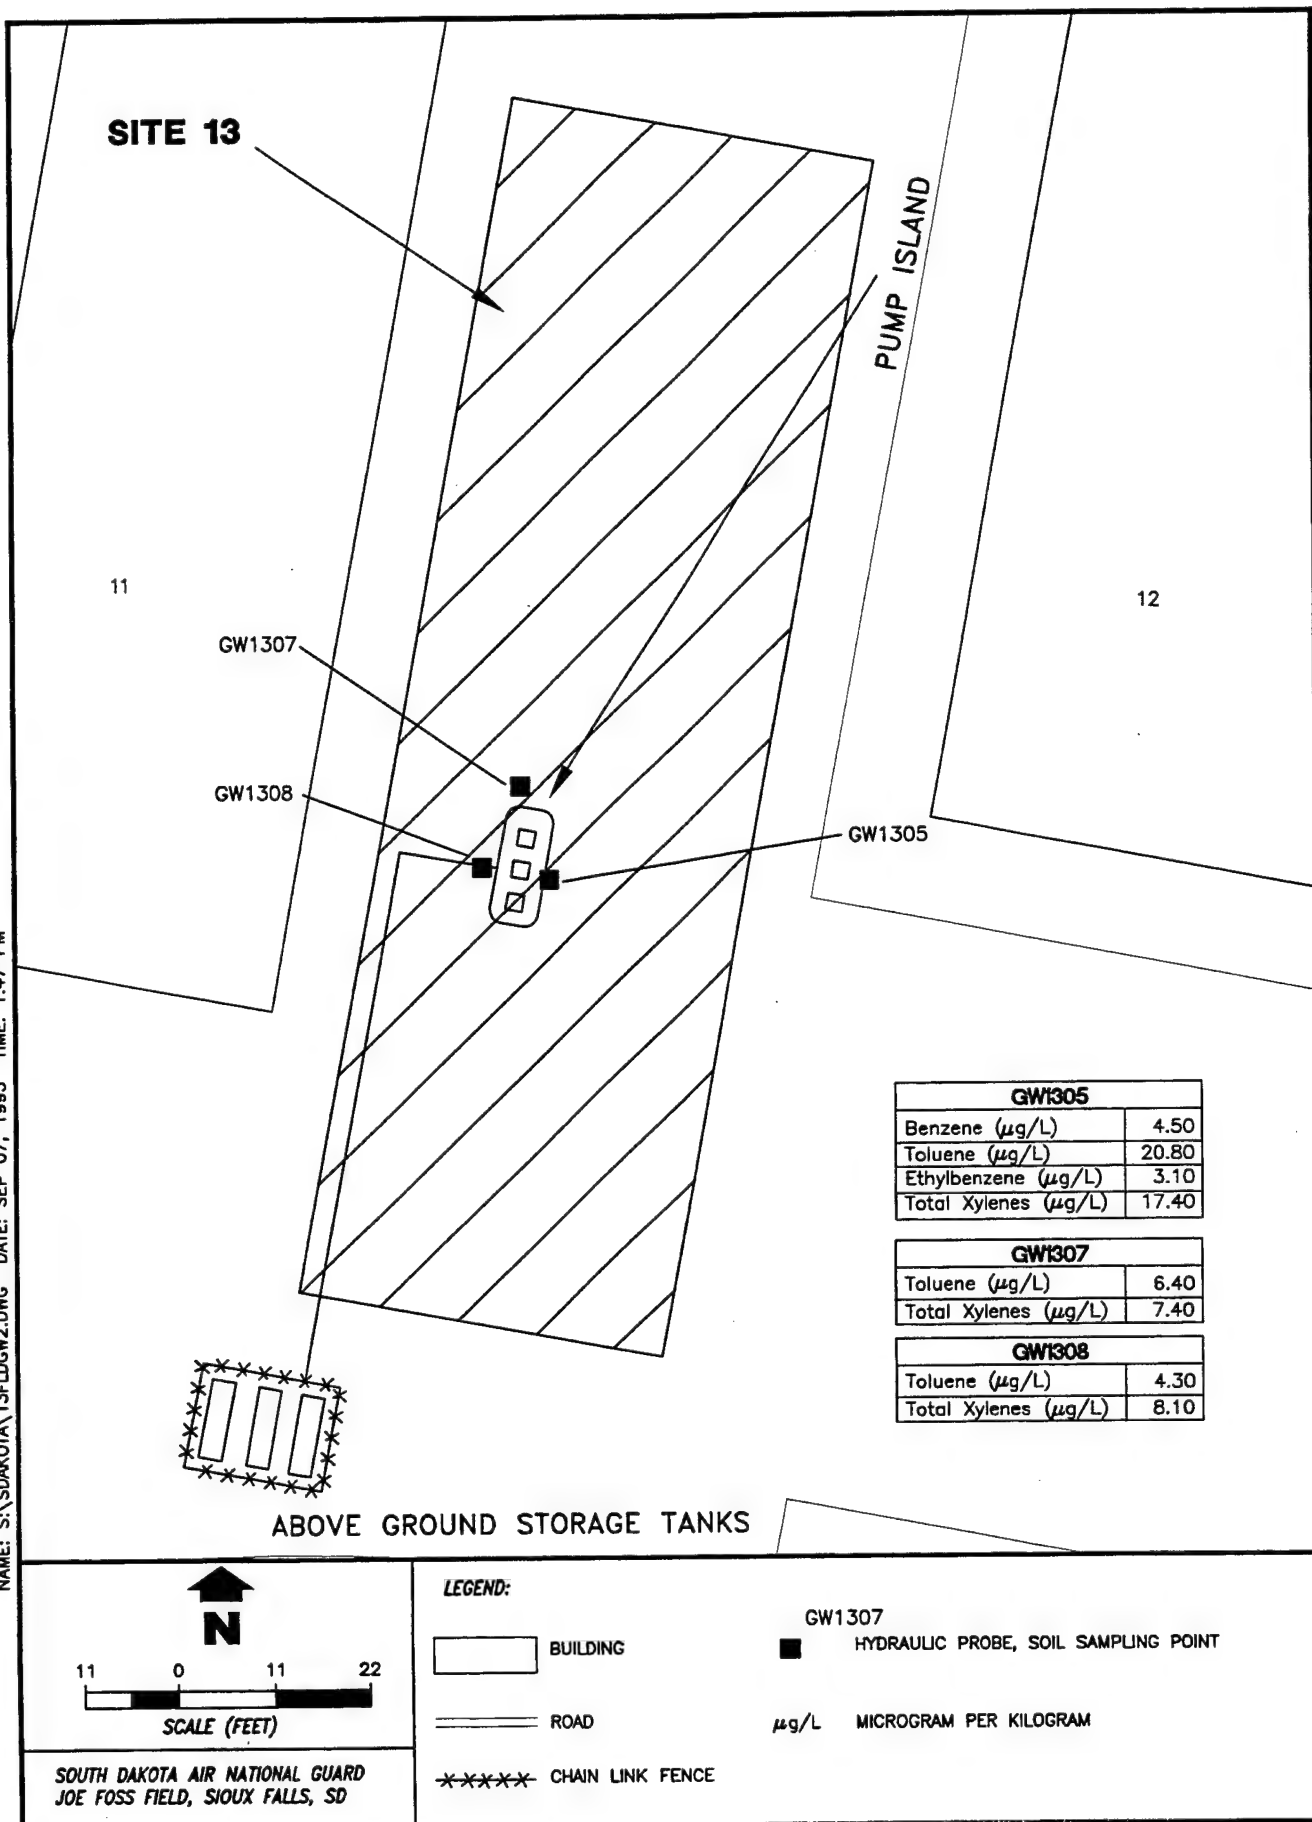


Figure 5-4. Summary of Site 13 Groundwater Field Screening Results

Table 5-5. Site 13 Groundwater Field Screening* Summary of Results

Parameter	Detection Limit	GW1305	GW1307	GW1308
Benzene	1 µg/L	4.5	ND	ND
Toluene	1 µg/L	20.8	6.4	4.3
Ethylbenzene	1 µg/L	3.1	ND	ND
Total Xylenes	1 µg/L	17.4	7.4	8.1
Solvents	1 µg/L	ND	ND	ND
TPH	500 µg/L	ND	ND	ND

* Analyzed by onsite laboratory .

Note: Refer to Figure 5-4 for sample locations.

5.2.2 Soils

Two soil samples were collected from each of four locations at Site 13 and analyzed for BTEX, TPH, vinyl chloride, chloroform, 1,1,1-trichloroethane, trichloroethene, 1,2-dichloroethene, tetrachloroethene, and carbon tetrachloride. These samples, designated GS13-1, GS13-2, GS13-3, and GS13-4, contained no detectable concentrations of these analytes.

5.2.3 Groundwater

Monitoring well MW13-1 was sampled at Site 13 for BTEX, TPH, and eight solvents. All results for these analytes were below detection limits.

6. CONCLUSIONS

6.1 SITE 12 - RAMP AREA CONCLUSIONS

Subsurface soils immediately east of Area 1 contain detectable concentrations of benzene, toluene, ethylbenzene, and xylene (BTEX) and total petroleum hydrocarbons (TPH) in the soil vapor phase. The highest concentrations of soil vapors are located around soil organic vapor (SOV) point 19 (391.7 $\mu\text{g/L-V}$ TPH and 59.2 $\mu\text{g/L-V}$ xylenes). This point might have been the center of a spill or other release of petroleum products. The soil gas detections seem to be most areally extensive in the 6- to 8-foot sampling interval (approximately 9,000 square feet).

TPH was detected in low concentrations at two of five sampling locations (at 5 and 10 mg/kg [5 and 10 ppm] at GS03 and 5 mg/kg [5 ppm] at GS05) during field screening of soils to confirm the SOV results. No pattern of TPH distribution was apparent among the samples in which TPH was detected. Soil analysis for BTEX and TPH indicated TPH was present above detection limits only at GS05, at 94 $\mu\text{g/kg}$ (0.094 ppm). The location of GS05 coincides with SOV point 19. Petroleum odors were noticeable during sampling.

TPH was detected during groundwater screening at GW12-6 at 70 $\mu\text{g/L}$ (a duplicate sample of GW12-5). BTEX compounds were not detected during the groundwater screening. During confirmatory sampling of the five monitoring wells, TPH was detected at MW12-1, at 81 $\mu\text{g/L}$ and 340 $\mu\text{g/L}$ in two rounds of sampling. The location of GW12-5 coincides with SOV point 19.

These findings indicate that isolated areas of contamination are present in the subsurface soils. This is consistent with the Geotek investigation conducted in 1993. TPH contamination in soils may be impacting groundwater quality at Site 12, especially in the area immediately east of Area 1. However, contaminant levels in soils are below the South Dakota Department of Environment and Natural Resources (DENR) cleanup levels. Maximum contaminant levels (MCLs) for BTEX compounds were not exceeded in groundwater. However, one occurrence of TPH (340 $\mu\text{g/L}$ at MW12-1) exceeds the South Dakota standard of 100 $\mu\text{g/L}$ for wellhead protection areas.

6.2 SITE 13 - MOTOR VEHICLE MAINTENANCE FACILITY CONCLUSIONS

BTEX compounds, TPH, and organic solvents were not detected during the SOV survey and soil screening at Site 13. These analytes were not detected during offsite laboratory analysis of soils at four locations at Site 13.

BTEX compounds were detected at low concentrations in groundwater screening samples obtained from the immediate area of the pump island, at Geoprobe locations GW1305, GW1307, and GW1308. TPH and solvents were not present above detection limits. No analytes above detection limits were detected during offsite laboratory analysis of the groundwater sample from monitoring well GW1-13-01, located downgradient from the Geoprobe points.

7. RECOMMENDATIONS

7.1 SITE 12 - RAMP AREA RECOMMENDATIONS

Isolated areas of low-level contamination have been identified in subsurface soils and groundwater at Site 12. This contamination is present in the area immediately east of Area 1, and at one point in the northwestern corner of the site. Soil organic vapor (SOV) data indicate that a potential source is or was located in soils at or near SOV point 19, immediately east of Area 1. Noticeable odors of petroleum were present during soil and water sampling at Site 12. Soil samples collected at Site 12 contained total petroleum hydrocarbons (TPH) at concentrations below the South Dakota Department of Environment and Natural Resources (DENR) cleanup level of 100 mg/kg.

TPH were detected in one of the five monitoring wells sampled. Concentrations of TPH were below maximum contaminant levels (MCLs) or the South Dakota requirements for wellhead protection areas with one exception (340 $\mu\text{g/L}$ at MW12-1). The groundwater analytical results do not indicate that the TPH is migrating.

The results indicate that contamination is present in the soils and that groundwater quality is locally affected. Therefore, it is recommended that the Air National Guard (ANG) continue groundwater monitoring on a quarterly basis. Groundwater samples were collected from Site 12 in June and July 1995. Three additional rounds of groundwater samples will be collected in February, May, and August 1996. The samples will be analyzed for TPH and benzene, toluene, ethylbenzene, and xylene (BTEX). Continued monitoring will expand the data set for groundwater at Site 12, allowing ANG to determine temporal and spatial variations in TPH concentrations. The data should allow ANG to evaluate whether soil contamination east of Area 1 impacts the groundwater sufficiently to warrant further study.

7.2 SITE 13 - MOTOR VEHICLE MAINTENANCE FACILITY RECOMMENDATIONS

TPH, solvents, and BTEX compounds were not detected during soil gas, soil, and groundwater analyses at Site 13. Although BTEX compounds were present at low concentrations in three groundwater screening locations, none was detected in the sample from the monitoring

well installed at Site 13. BTEX concentrations in groundwater did not exceed MCLs. Because of these findings, Site 13 is recommended for no further action. A decision document recommending no further action should be prepared for Site 13. This recommendation is consistent with the observed low levels of contamination.

8. REFERENCES

HDR (HDR Engineering, Inc.). 1990. Big Sioux Aquifer Study, Part 1 - Evaluation of Existing Well Field. July 1990.

HMTC (Hazardous Materials Technical Center). 1986. Phase I Records Search, South Dakota Air National Guard, Joe Foss Field, Sioux Falls, South Dakota. June.

Jorgensen, D.G., and E.A. Ackroyd. 1973. Water Resources of the Big Sioux River Valley Near Sioux Falls, South Dakota. U.S. Geological Survey Water Supply Paper 2024.

Koch, N.C. 1982. A Digital-Computer Model of the Big Sioux Aquifer in Minnehaha County, South Dakota, U.S. Geological Survey Water Resources Investigations Report. 82-4064. Huron, South Dakota.

DENR (Department of Environment and Natural Resources). 1993. Letter from Bill Markley, Administrator, Groundwater Quality Program, Division of Environment Regulation, South Dakota Department of Environment and Natural Resources, to Colonel Tom Lien, SDANG, dated January 6, 1993.

DENR. 1994. Letter from Bill Markley, Administrator, Groundwater Quality Program, Division of Environmental Regulation, South Dakota Department of Environment and Natural Resources, to Colonel Tom Lien, SDANG, dated December 7, 1994.

SAIC (Science Applications International Corporation). 1990. Installation Restoration Program Remedial Investigation Final Report. South Dakota Air National Guard, Joe Foss Field, Sioux Falls, South Dakota. September.

SAIC. 1994. Minutes of Meeting Held at South Dakota Air National Guard on December 9, 1994.

SAIC. 1995. Installation Restoration Program Site Investigation Final Work Plan. South Dakota Air National Guard, Joe Foss Field, Sioux Falls, South Dakota. May.

USDA (U.S. Department of Agriculture). 1964. Soil Survey - Minnehaha County. South Dakota Series 1958, No. 30. USDA Soil Conservation Service.

THIS PAGE WAS INTENTIONALLY LEFT BLANK

**APPENDIX A. TARGET ENVIRONMENTAL SERVICES, INC.
SITE SCREENING DATA REPORT**

THIS PAGE WAS INTENTIONALLY LEFT BLANK

SITE SCREENING DATA

**JOE FOSS FIELD
SIOUX FALLS, SOUTH DAKOTA**

PREPARED FOR

**SAIC
1710 GOODRIDGE DRIVE
MCLEAN, VIRGINIA 22102**

PREPARED BY

**TARGET ENVIRONMENTAL SERVICES, INC.
9180 RUMSEY ROAD
COLUMBIA, MARYLAND 21045
(410) 992-6622**

JULY 1995

THIS PAGE WAS INTENTIONALLY LEFT BLANK

TABLE OF CONTENTS

	<u>Page</u>
Introduction	1
Sample Collection and Analysis	1
Quality Assurance/Quality Control (QA/QC) Evaluation	4
Results	4

FIGURES

Figures 1-3. Sample Locations

Figures 4-19. Analyte Concentration Maps

TABLES

Soil Gas Sample Analyses & QA/QC Data

Area 12 Soil Sample Analyses & QA/QC Data

Area 13 Water Sample Analyses & QA/QC Data

Area 13 Soil Sample Analyses & QA/QC Data

THIS PAGE WAS INTENTIONALLY LEFT BLANK

Introduction

SAIC contracted TARGET Environmental Services, Inc. (TARGET) to perform a site screening survey at Joe Foss Field, an active municipal airfield shared by the National Guard and civilian aviators in Sioux Falls, South Dakota. The study area actually includes two sites: the Area 12 Site - Ramp Area and the Area 13 Site - Motor Vehicle Maintenance Facility. Under the direction of SAIC personnel a total of 176 soil gas, 32 soil and 26 groundwater samples were collected at the site. All of the samples except for 5 groundwater samples were analyzed for benzene, toluene, ethylbenzene, xylenes (BTEX) and total petroleum hydrocarbons (TPH). Area 13 Site samples were also analyzed for solvent. The field phase of the survey was performed on June 8-15, 1995.

Sample Collection and Analysis

Soil gas, soil and groundwater samples were collected at multiple depths at the locations shown in Figures 1 through 3. Soil gas samples were collected at 2-foot intervals as deep as 8 feet, soil samples were collected over 2-foot intervals as deep as 9 feet, and groundwater samples were generally collected from 10 to 12 feet.

Prior to the collection of each soil gas sample, the entire sampling system (including down-hole probe, tubing, syringe, and all associated plumbing) was purged with ambient air drawn through an organic vapor filter cartridge. An electric hammer drill was used to penetrate pavement where necessary. To collect the samples, a truck-mounted hydraulic probe was used to advance connected 3-foot sections of 1" to 1.5" OD threaded steel casing down to the sampling depth. Once at depth, the casing was hydraulically raised a fraction of an inch to release a disposable drive point and open the bottom of the casing. A teflon line with a hollow stainless

steel probe end was inserted into the casing to the bottom of the hole, and threaded through a plug which isolates the bottom-hole sampling chamber from the up-hole annulus. A sample of in-situ soil gas was then withdrawn through the probe and used to purge atmospheric air from the sampling system. A second sample of soil gas was withdrawn through the probe and encapsulated in a pre-evacuated glass vial at two atmospheres of pressure (15 psig). The self-sealing vial was detached from the sampling system, packaged, labeled, and stored for laboratory analysis. Deeper samples within the same boring were collected by readvancing the casing with the disposable drive point leading. All sampling holes were backfilled with bentonite and the surface repaired with like material upon completion of the sampling.

Prior to the day's field activities all sampling equipment and probes were decontaminated by washing with a Liquinox/distilled water solution and rinsing thoroughly with distilled water. Internal surfaces were air-dried, and external surfaces were wiped clean using clean paper towels.

To collect the soil samples, a the hydraulic probe was used to advance a 24" long, 1.25" to 1.75" OD steel sampling tube (equipped with an acetate liner and a piston stop tip) attached to connected sections of casing down to the sampling depth. An electric hammer drill was used to penetrate pavement where necessary. The piston stop was then released and the pipe driven an additional 2 feet, allowing soil to enter the sampling tube. The sampling tube was retrieved, and the liner containing the soil core was removed from the casing. The soil was then extruded into glass jars, which were sealed with teflon-lined caps, labeled and relinquished to TEG's on-site mobile laboratory for analysis. The sampling tube was decontaminated by scrubbing with a solution of Liquinox/distilled water, rinsing with distilled water and drying with clean paper towels prior to reuse. A new liner was used for each sample.

To collect the groundwater samples, the hydraulic probe was used to advance steel casing to the sampling depth. An electric hammer drill was used to penetrate pavement where necessary. The steel casing was removed and connected 5-foot sections of 1/2" PVC slotted screen and riser were inserted to the full depth of the hole. A water level sensor was used to detect the surface of the groundwater table and to ensure that a sufficient amount of water had entered the pipe to complete a sample. The water level sensor was removed and the sample was collected using one of two methods. At locations in Area 12, an up-and-down motion was manually applied to a length of teflon tubing fitted at its lower end with a stainless steel ball check valve and inserted down into the casing to the groundwater table, in essence pumping the water using positive displacement. At Area 13 Site, a 21" long by 7/16" O.D. stainless steel bailer was used to collect the sample. Samples were placed in 40 ml glass vials, which were sealed, labeled and relinquished to TEG's on-site mobile laboratory for analysis.

Prior to the day's field activities and after collection of each sample, the steel casing and the bailer or teflon sampling tube were decontaminated by washing with a solution of Liquinox/distilled water, rinsing with distilled water and drying with filtered ambient air to ensure discrete sampling. New sections of PVC slotted screen and riser were used for each groundwater sampling location.

The samples selected for analysis by TEG were analyzed according to the following EPA Methods:

TPH:	8015 modified
BTEX:	8020
Solvent:	3810/8010

Quality Assurance/Quality Control (QA/QC) Evaluation

Field QA/QC Samples

Soil gas field control samples (blanks) were collected at the beginning and end of each day's field activities, between sites and after every twentieth sample. These QA/QC blanks were obtained by filtering ambient air through a dust and organic vapor filter cartridge and encapsulating as described in the "Field Procedures" in Appendix A. An equipment rinseate blank was collected after groundwater sampling at the Area 13 Site by rinsing distilled water through the decontaminated bailer into sample vials as previously described. The laboratory results for these samples are reported in the attached data tables in their order of collection with the field samples. Concentrations of all analytes were below the detection limit in all field control blanks, indicating that the QA/QC measures employed were sufficient to prevent cross-contamination of the samples during collection. Laboratory QA/QC is presented as received in the attached data tables.

Results

In order to provide graphic presentation of the results, individual data sets from the attached data tables with data above detection limits have been mapped and contoured to produce Figures 4 through 19. Map sample points with no data shown indicate that the analyte concentrations in the sample were below the detection limit. Area 12 soil samples were too far apart and too irregularly spaced to facilitate contouring, although the data was mapped. Area 13 soil samples yielded no detectable concentrations of BTEX or TPH and were therefore not mapped.

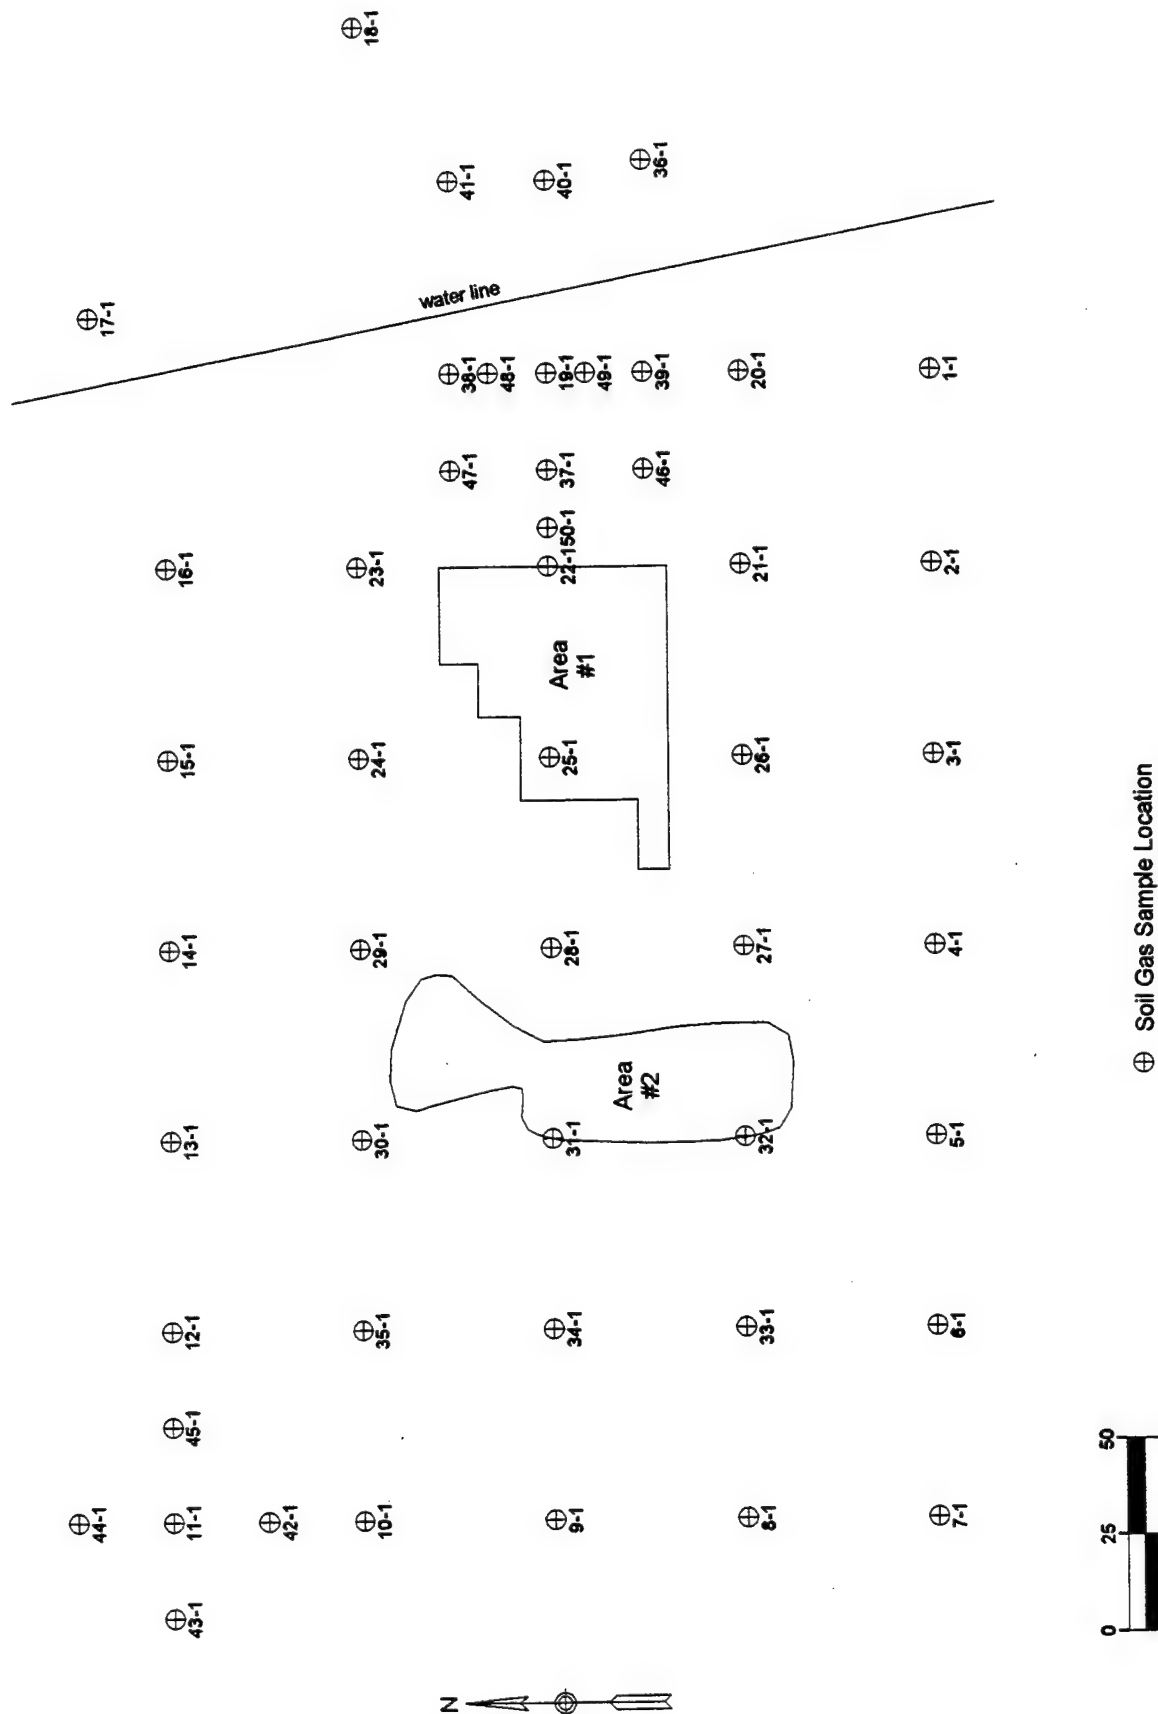


FIGURE 1. Soil Gas Sample Locations
 AREA 12 SITE
 SOUTH DAKOTA AIR NATIONAL GUARD STATION
 SIOUX FALLS, SOUTH DAKOTA

GS03-2

GS02-2

GS01-2

GS05-2

GS04-2




+ Soil Sample Location



TARGET ENVIRONMENTAL SERVICES, INC.

This map is integral to a written report
and should be viewed in that context.


FIGURE 2. Soil Sample Locations
AREA 12 SITE
SOUTH DAKOTA AIR NATIONAL GUARD STATION
SIOUX FALLS, SOUTH DAKOTA

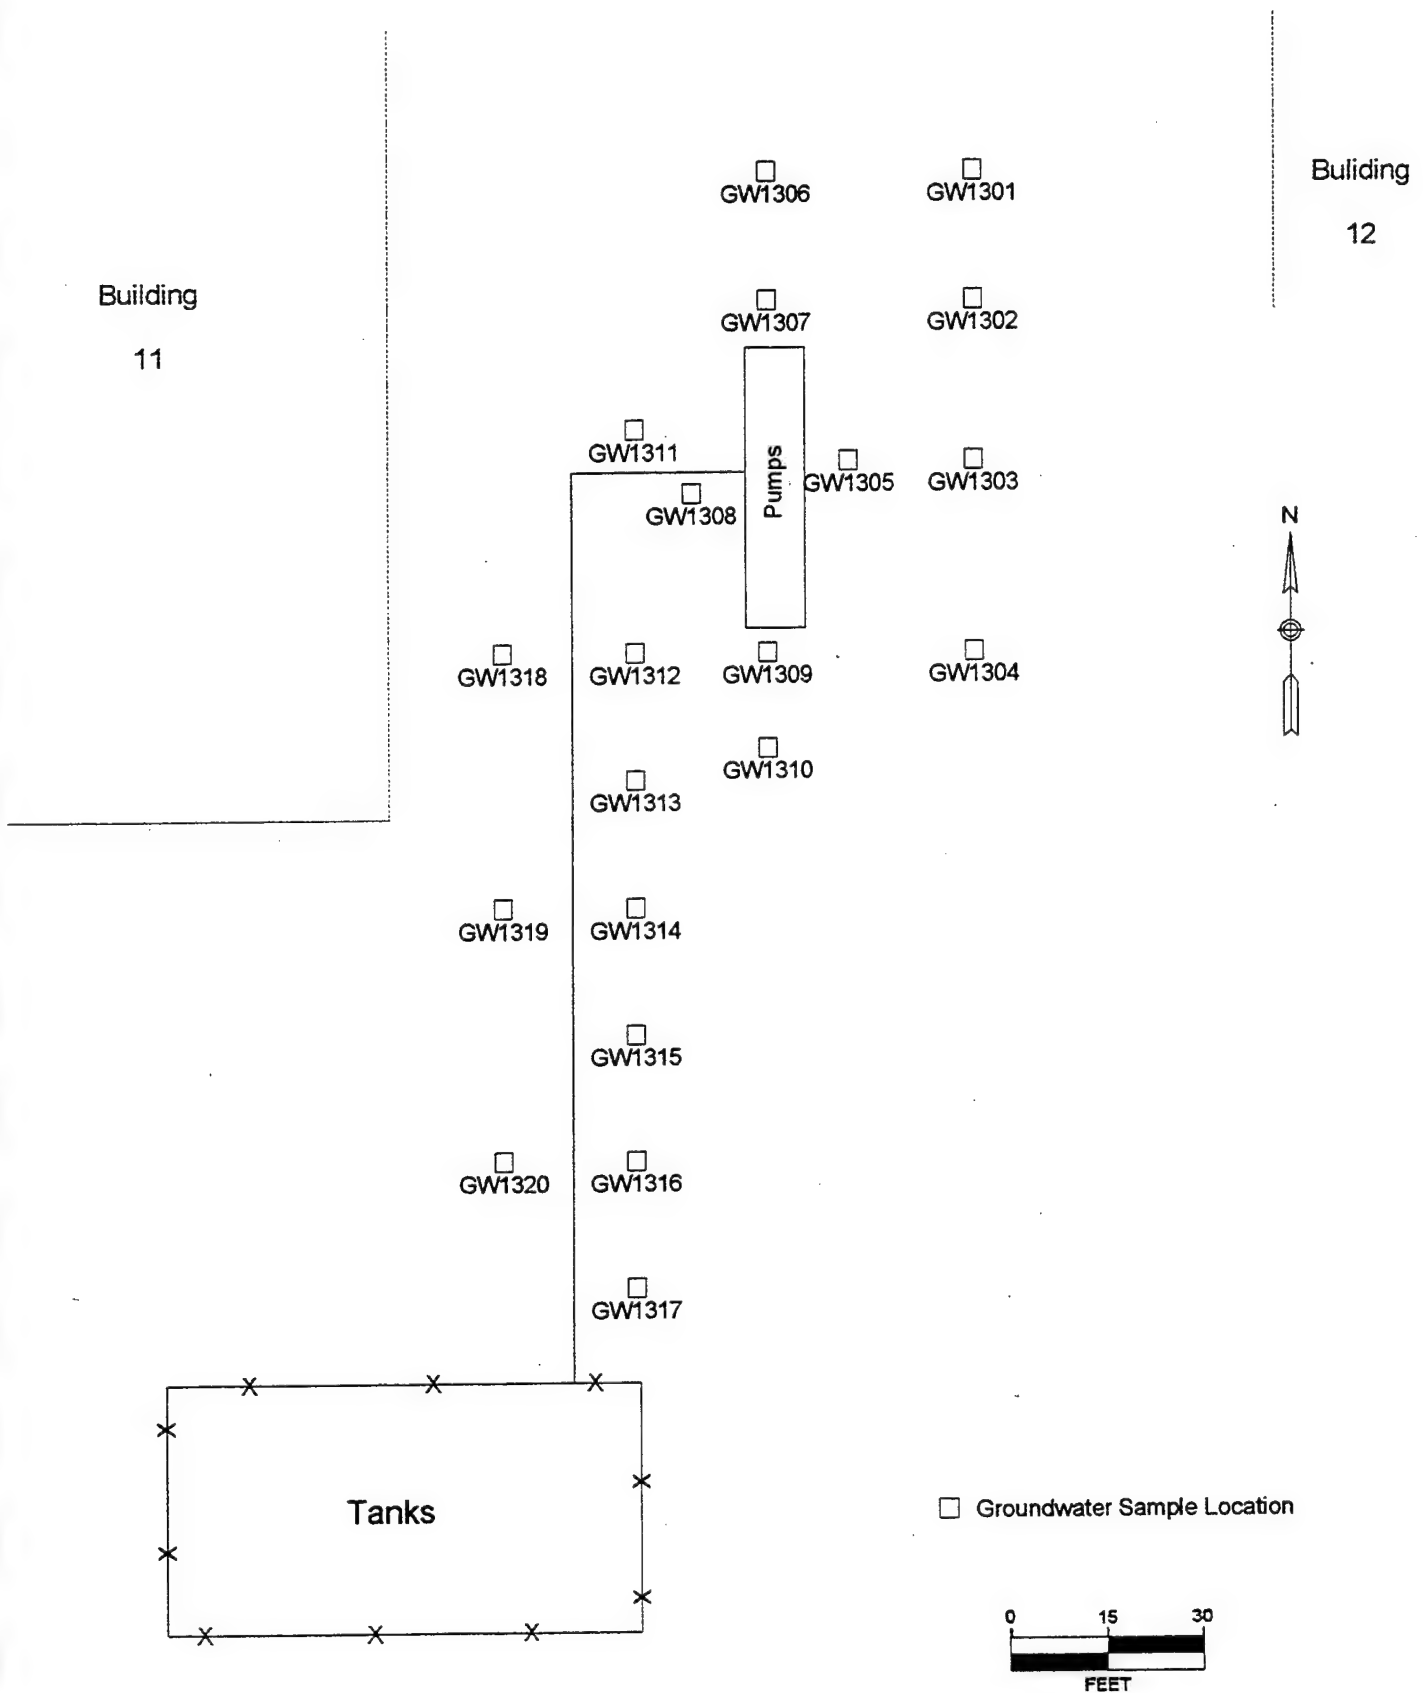

TARGET ENVIRONMENTAL SERVICES, INC.

This map is integral to a written report
and should be viewed in that context.

FIGURE 3. Groundwater Sample Locations
AREA 13 SITE
SOUTH DAKOTA AIR NATIONAL GUARD BASE
SIOUX FALLS, SOUTH DAKOTA

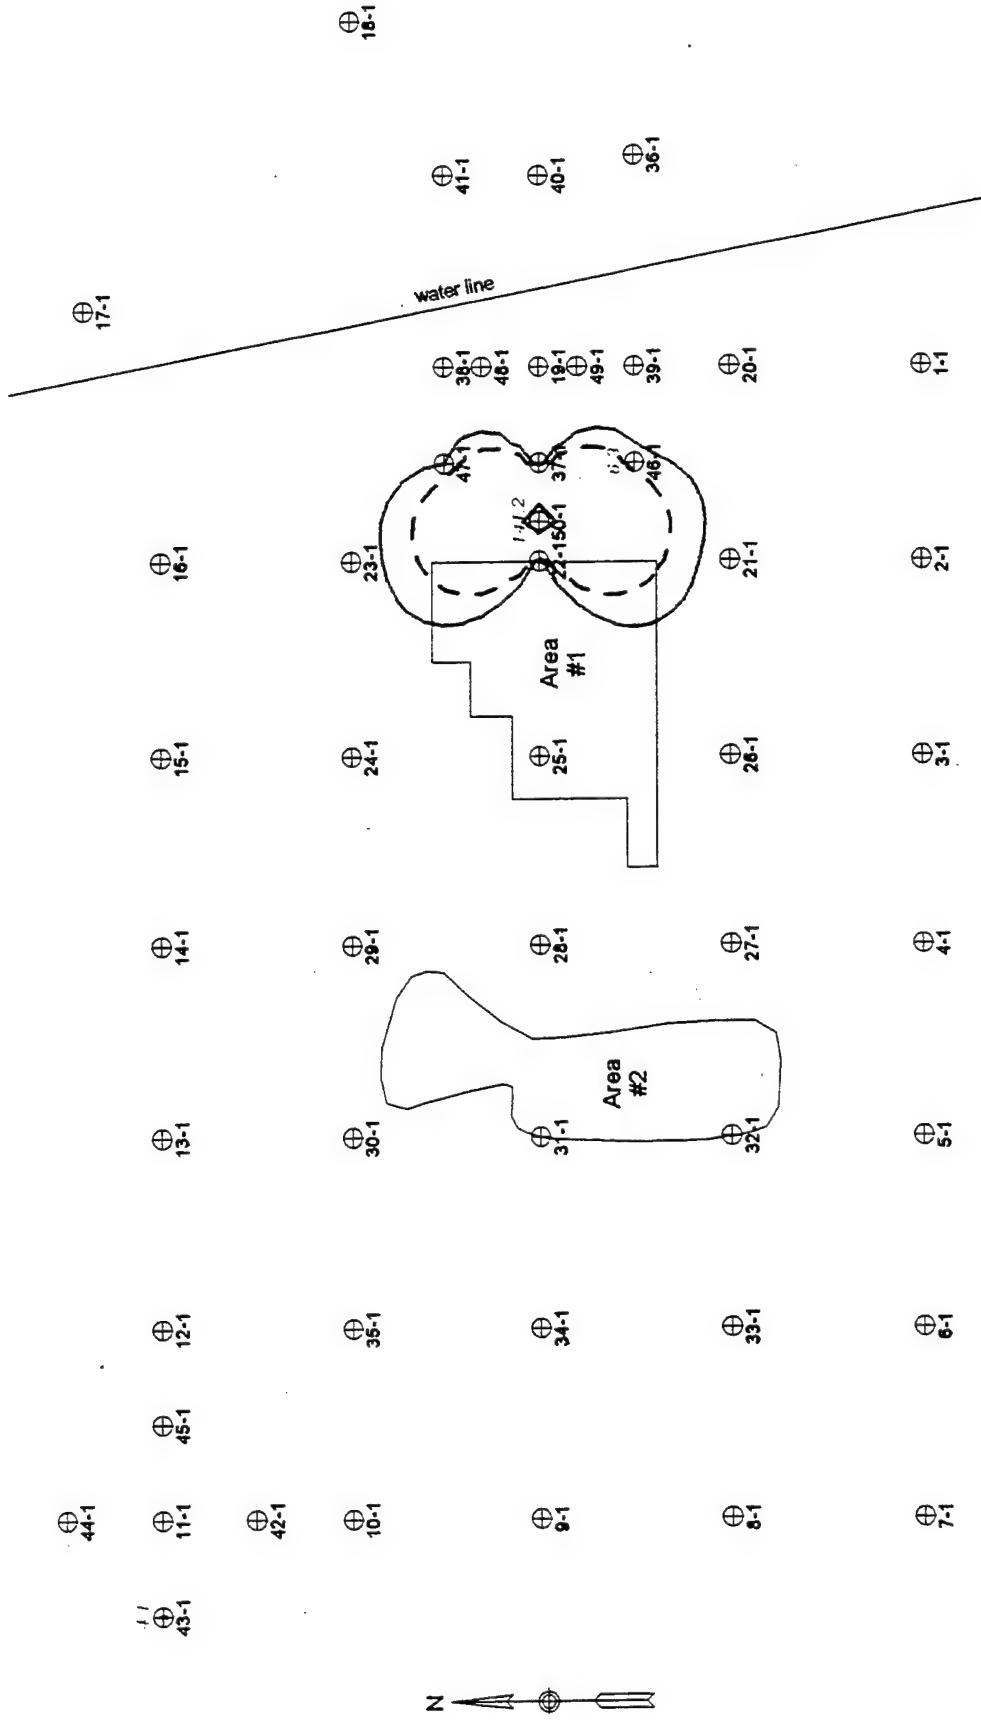

⊕ Soil Gas Sample Location

CONCENTRATION CONTOUR KEY
 10 --- --



TARGET ENVIRONMENTAL SERVICES, INC.

This map is integral to a written report and should be viewed in that context.

FIGURE 4. TPH (ug/l-v)

AREA 12 SOIL GAS, 2'
 SOUTH DAKOTA AIR NATIONAL GUARD STATION
 SIOUX FALLS, SOUTH DAKOTA

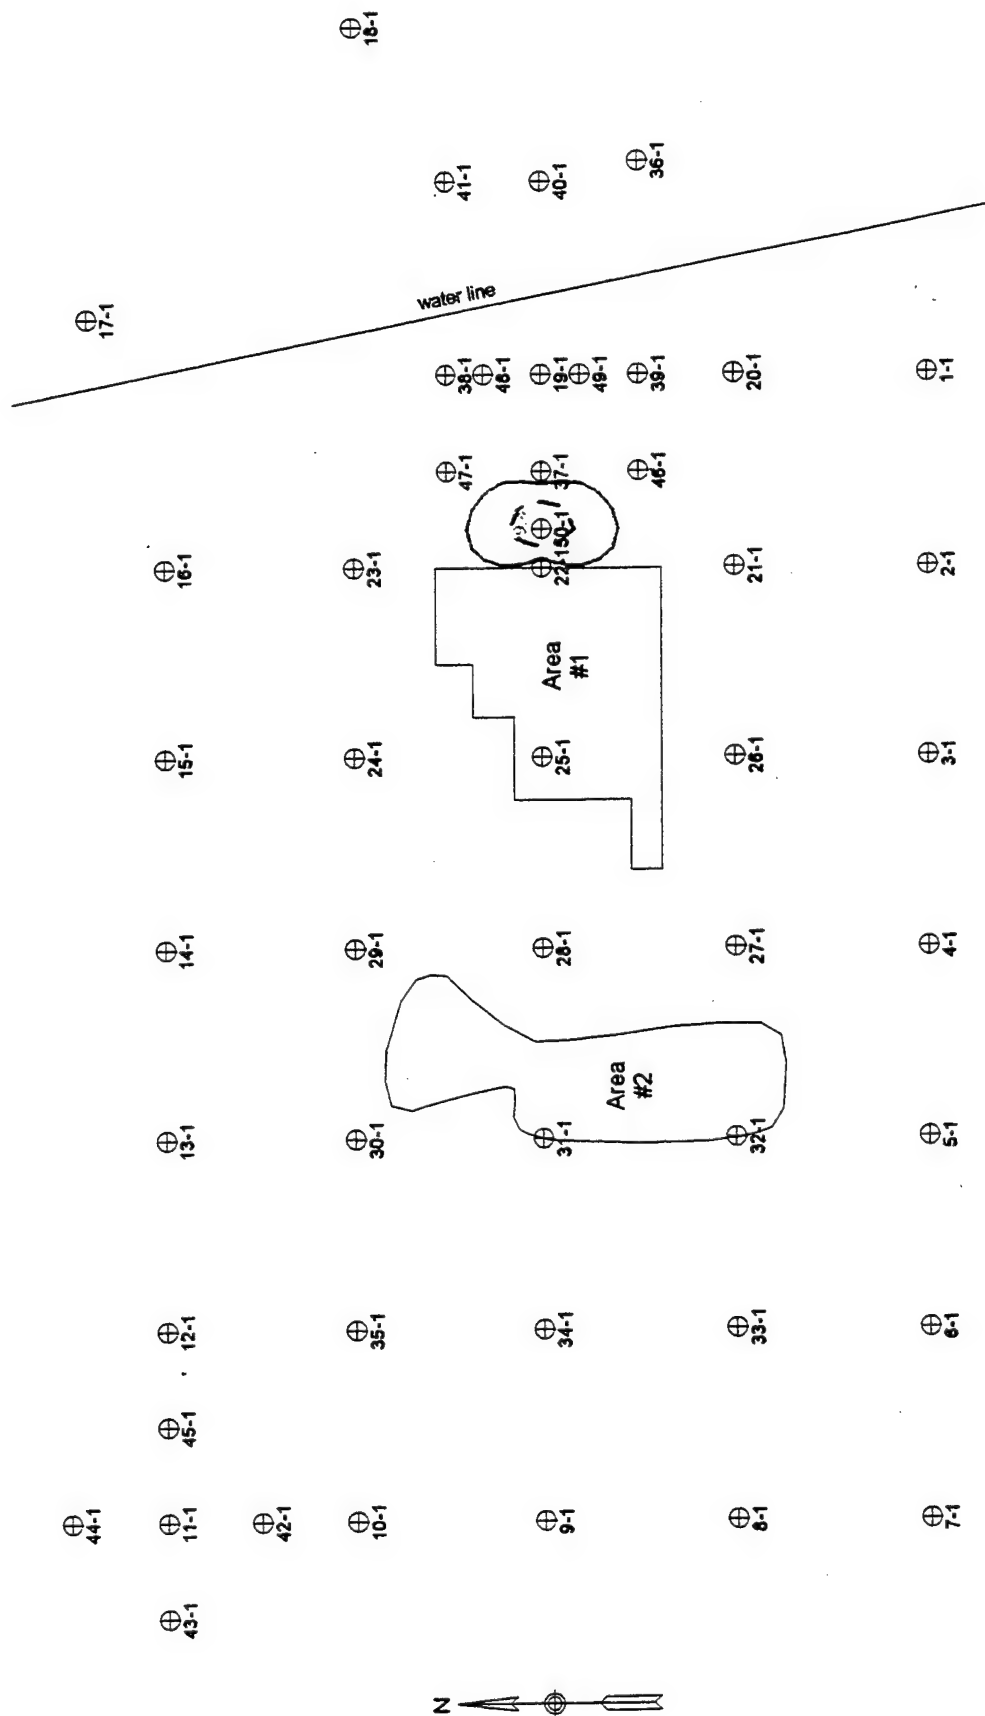


FIGURE 5. Ethylbenzene (ug/l-v)
 AREA 12 SOIL GAS, 2'
 SOUTH DAKOTA AIR NATIONAL GUARD STATION
 SIOUX FALLS, SOUTH DAKOTA

⊕ Soil Gas Sample Location

CONCENTRATION CONTOUR (UG/L-V)



4
10

0 25 50
 FEET



TARGET ENVIRONMENTAL SERVICES, INC.

This map is integral to a written report
 and should be viewed in that context.

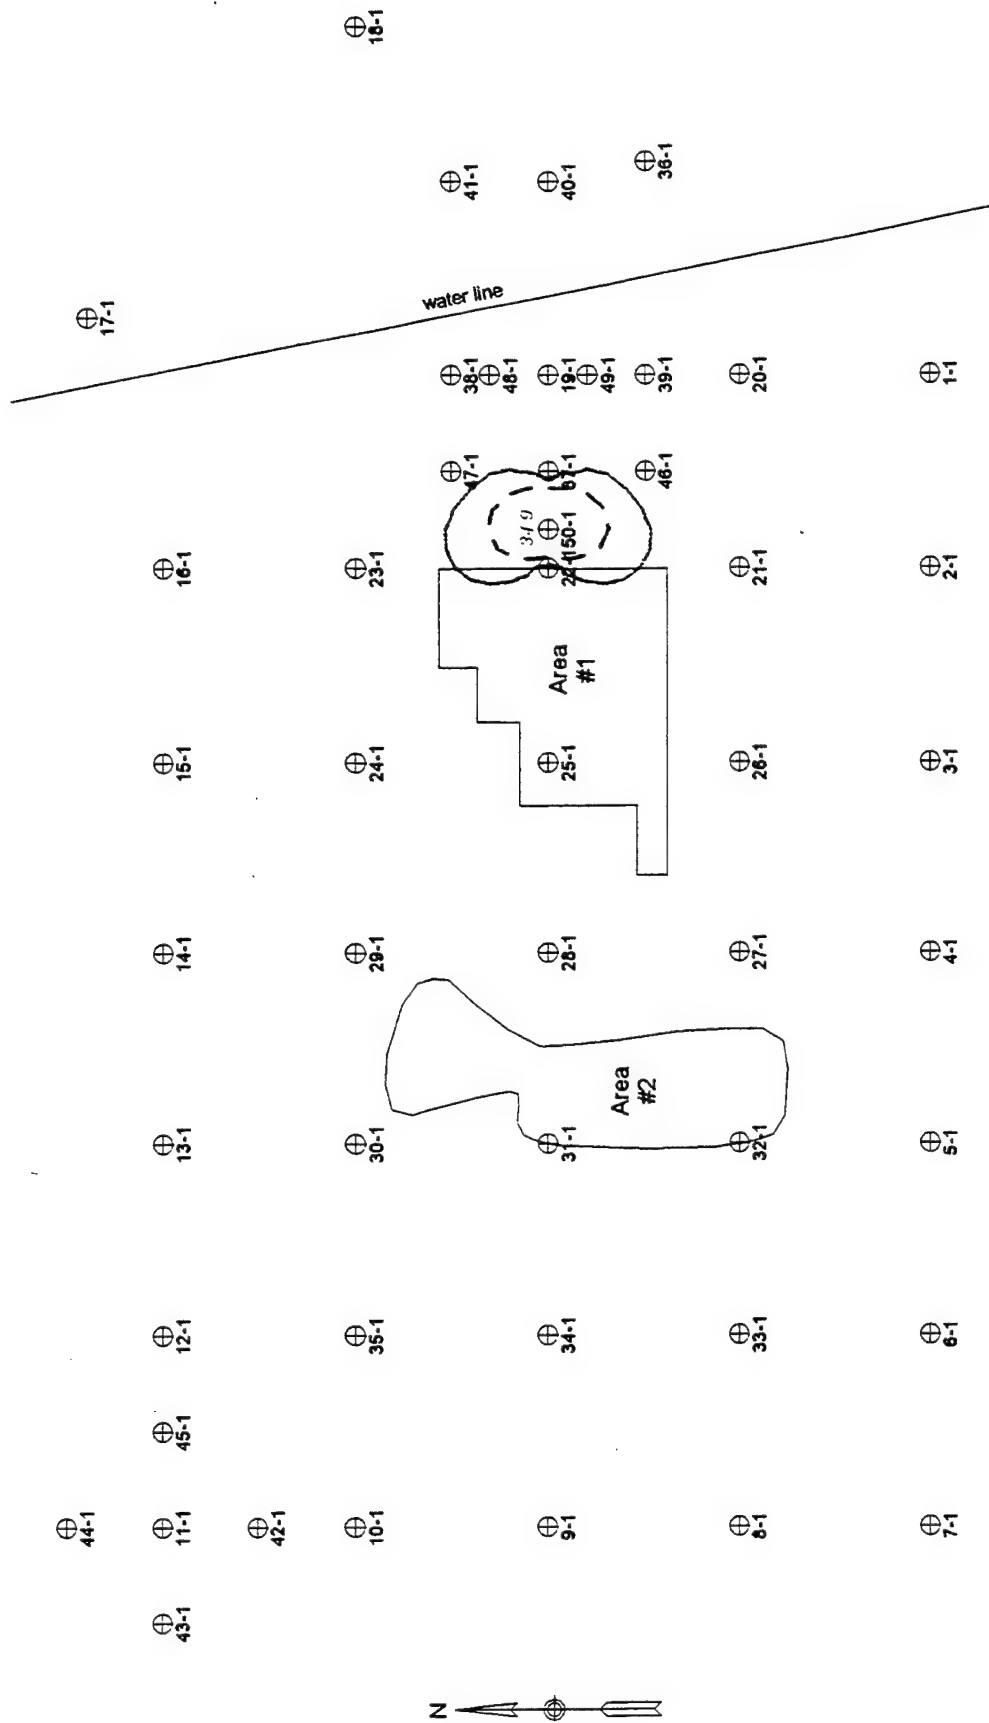

⊕ Soil Gas Sample Location

CONCENTRATION CONTOUR KEY
4 ———
10 - - -



TARGET ENVIRONMENTAL SERVICES, INC.

This map is integral to a written report and should be viewed in that context.

FIGURE 6. Xylenes (ug/l-v)

AREA 12 SOIL GAS, 2'
SOUTH DAKOTA AIR NATIONAL GUARD STATION
SIOUX FALLS, SOUTH DAKOTA


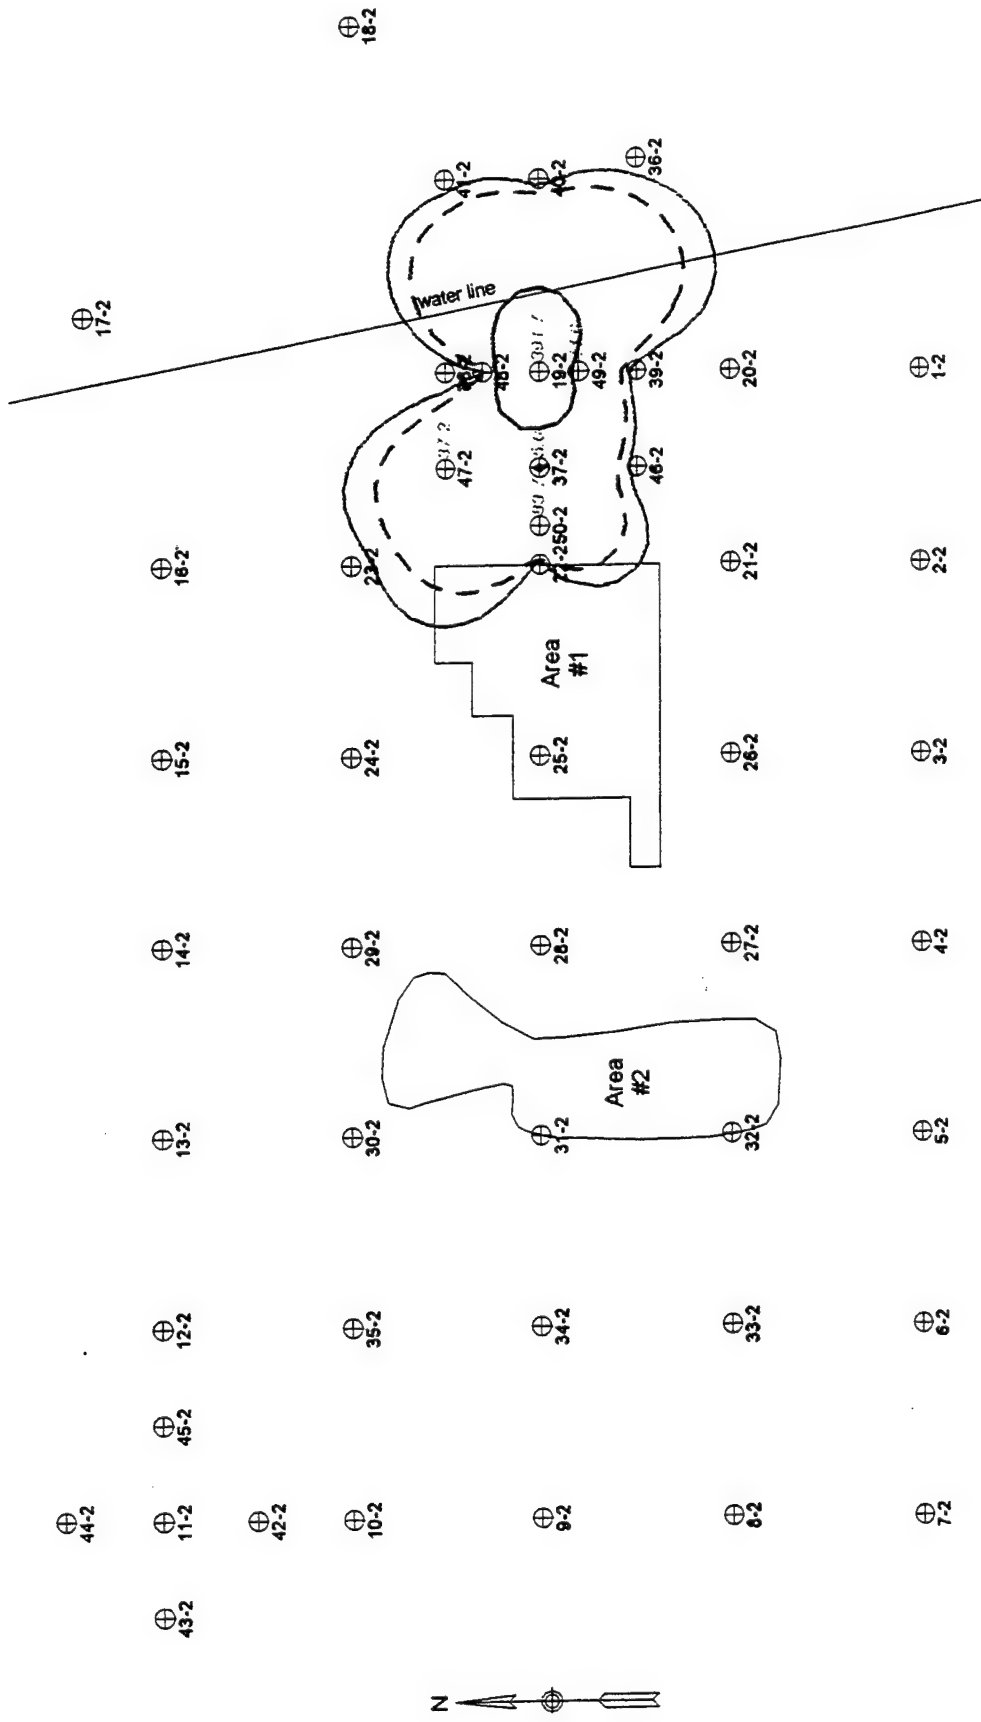


FIGURE 7. TPH (ug/l-v)
 AREA 12 SOIL GAS, 4'
 SOUTH DAKOTA AIR NATIONAL GUARD STATION
 SIOUX FALLS, SOUTH DAKOTA



⊕ Soil Gas Sample Location

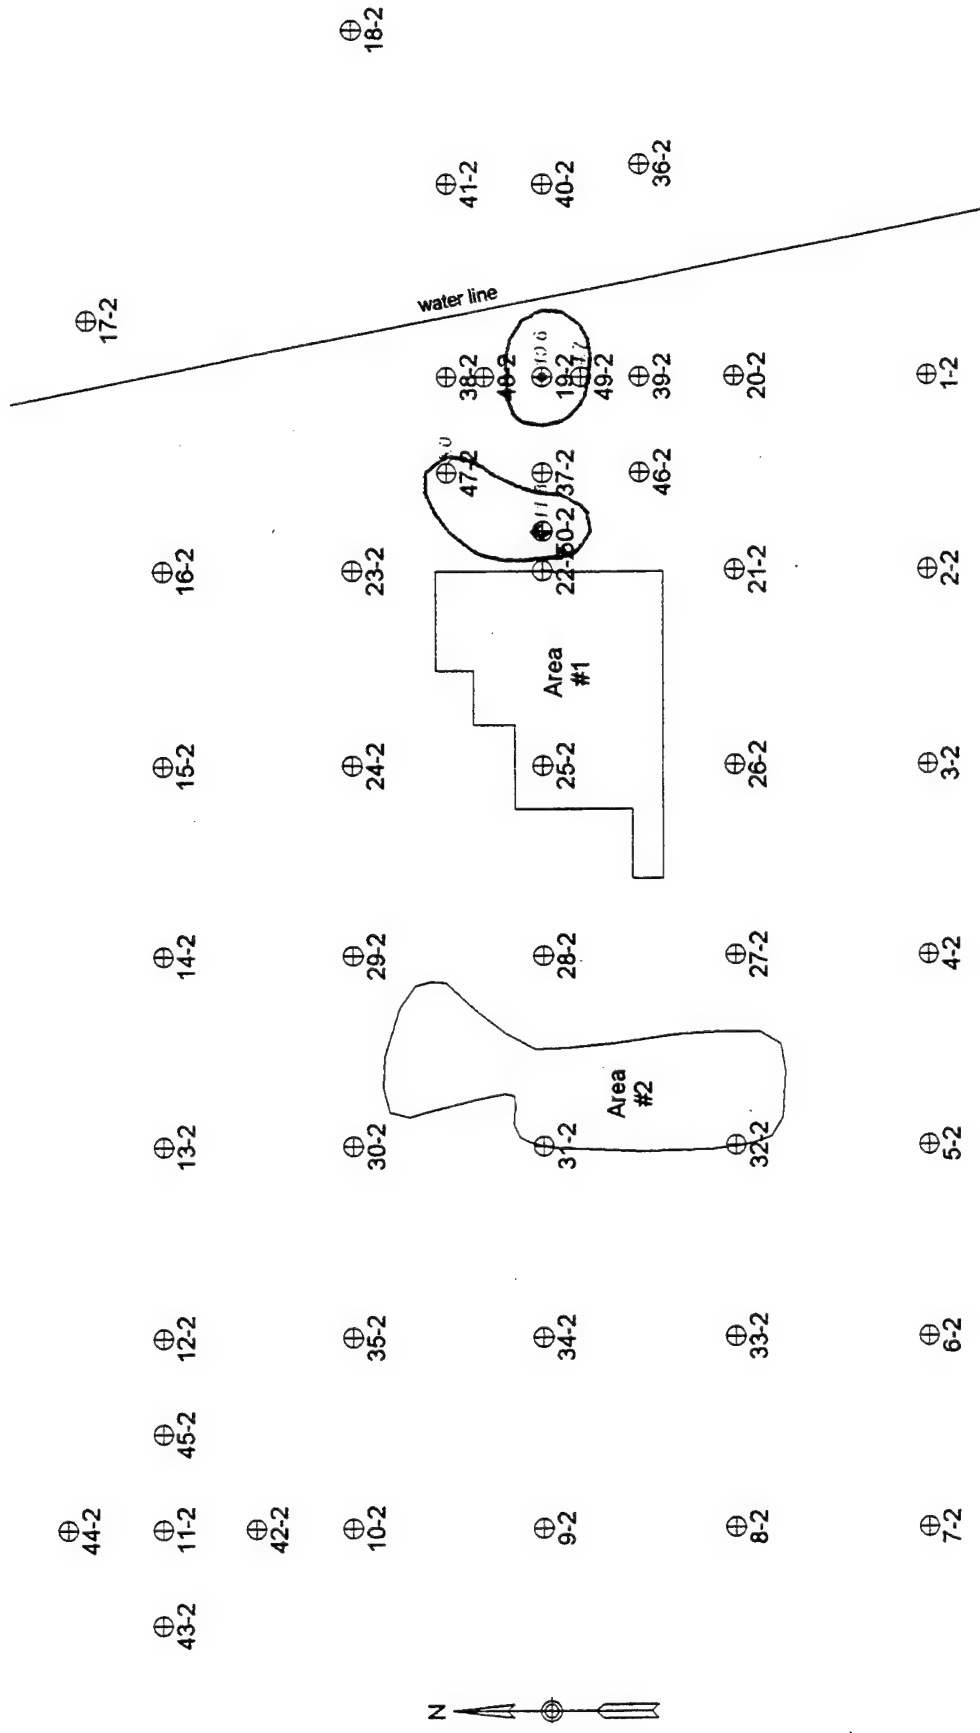

TARGET ENVIRONMENTAL SERVICES, INC.

CONCENTRATION CONTOUR LINE



FIGURE 8. Ethylbenzene (ug/l-v)

AREA 12 SOIL GAS, 4'
SOUTH DAKOTA AIR NATIONAL GUARD STATION
SIOUX FALLS, SOUTH DAKOTA

This map is integral to a written report and should be viewed in that context.


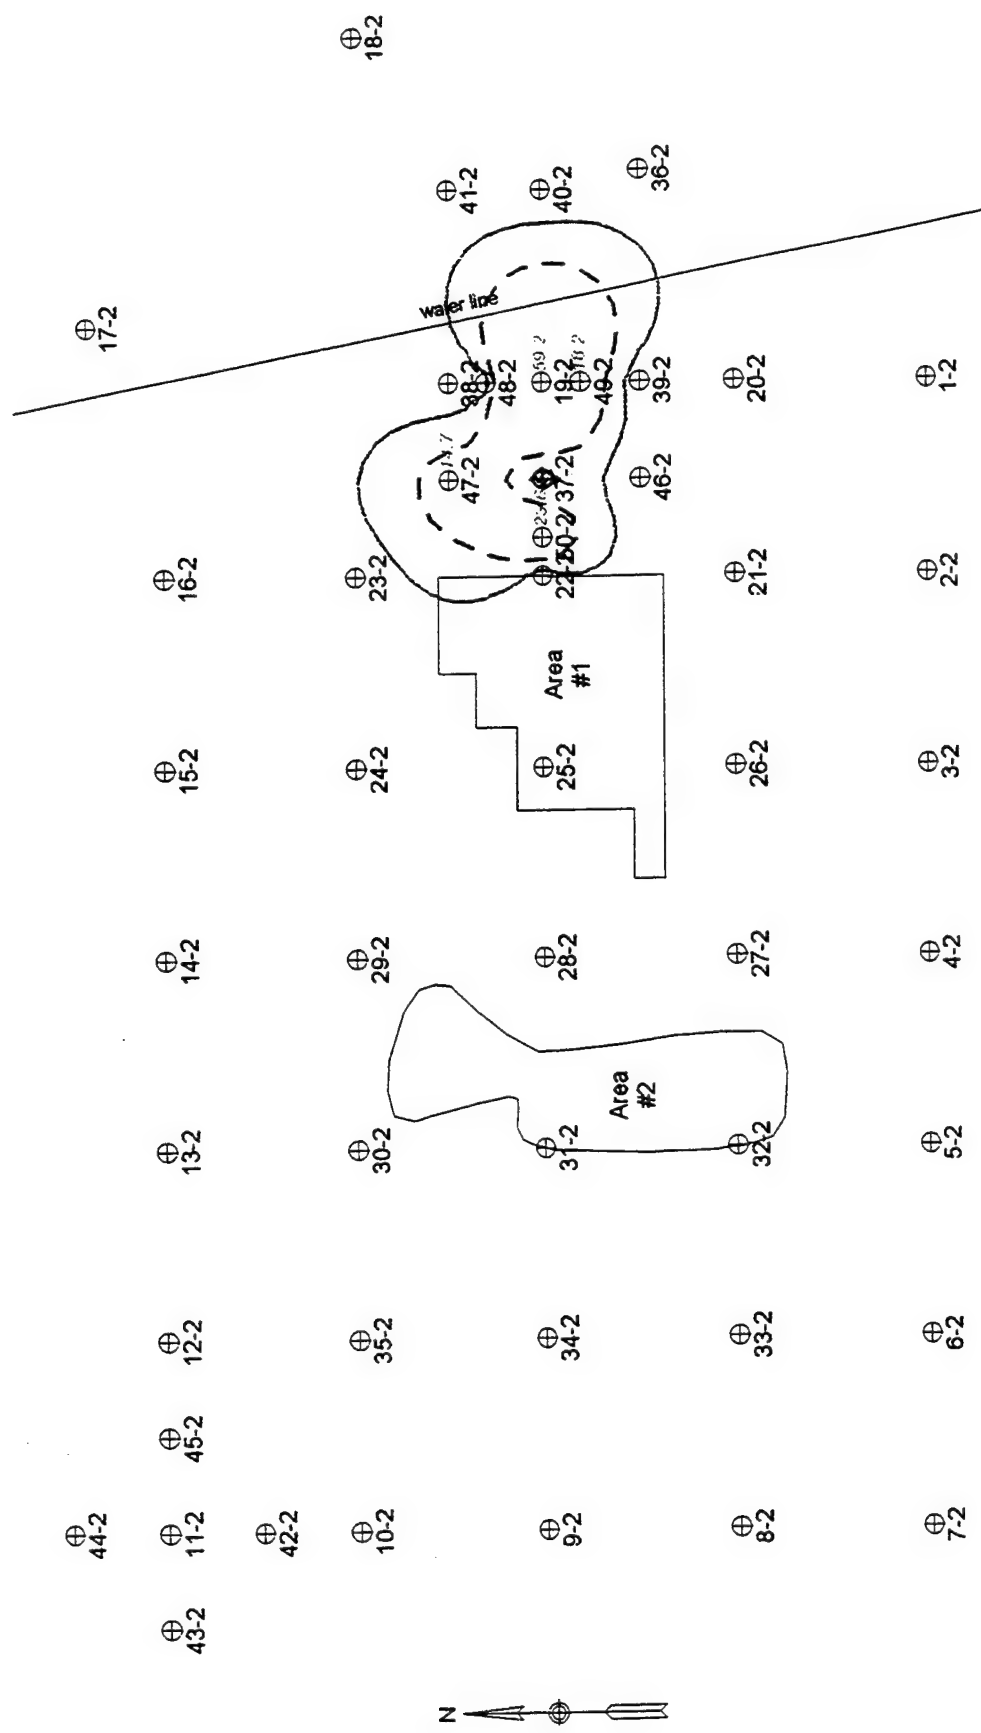


FIGURE 9. Xylenes (ug/l-v)
 AREA 12 SOIL GAS, 4'
 SOUTH DAKOTA AIR NATIONAL GUARD STATION
 SIOUX FALLS, SOUTH DAKOTA

CONCENTRATION CONTOUR KEY
 4
 10

TARGET ENVIRONMENTAL SERVICES, INC.

This map is integral to a written report and should be viewed in that context.




CONV. TRANSFORMER KEY

AREA 12 SITE SOIL GAS, 6'
SOUTH DAKOTA AIR NATIONAL GUARD STATION
SIOUX FALLS, SOUTH DAKOTA


TARGET ENVIRONMENTAL SERVICES, INC.

This map is integral to a written report and should be viewed in that context.

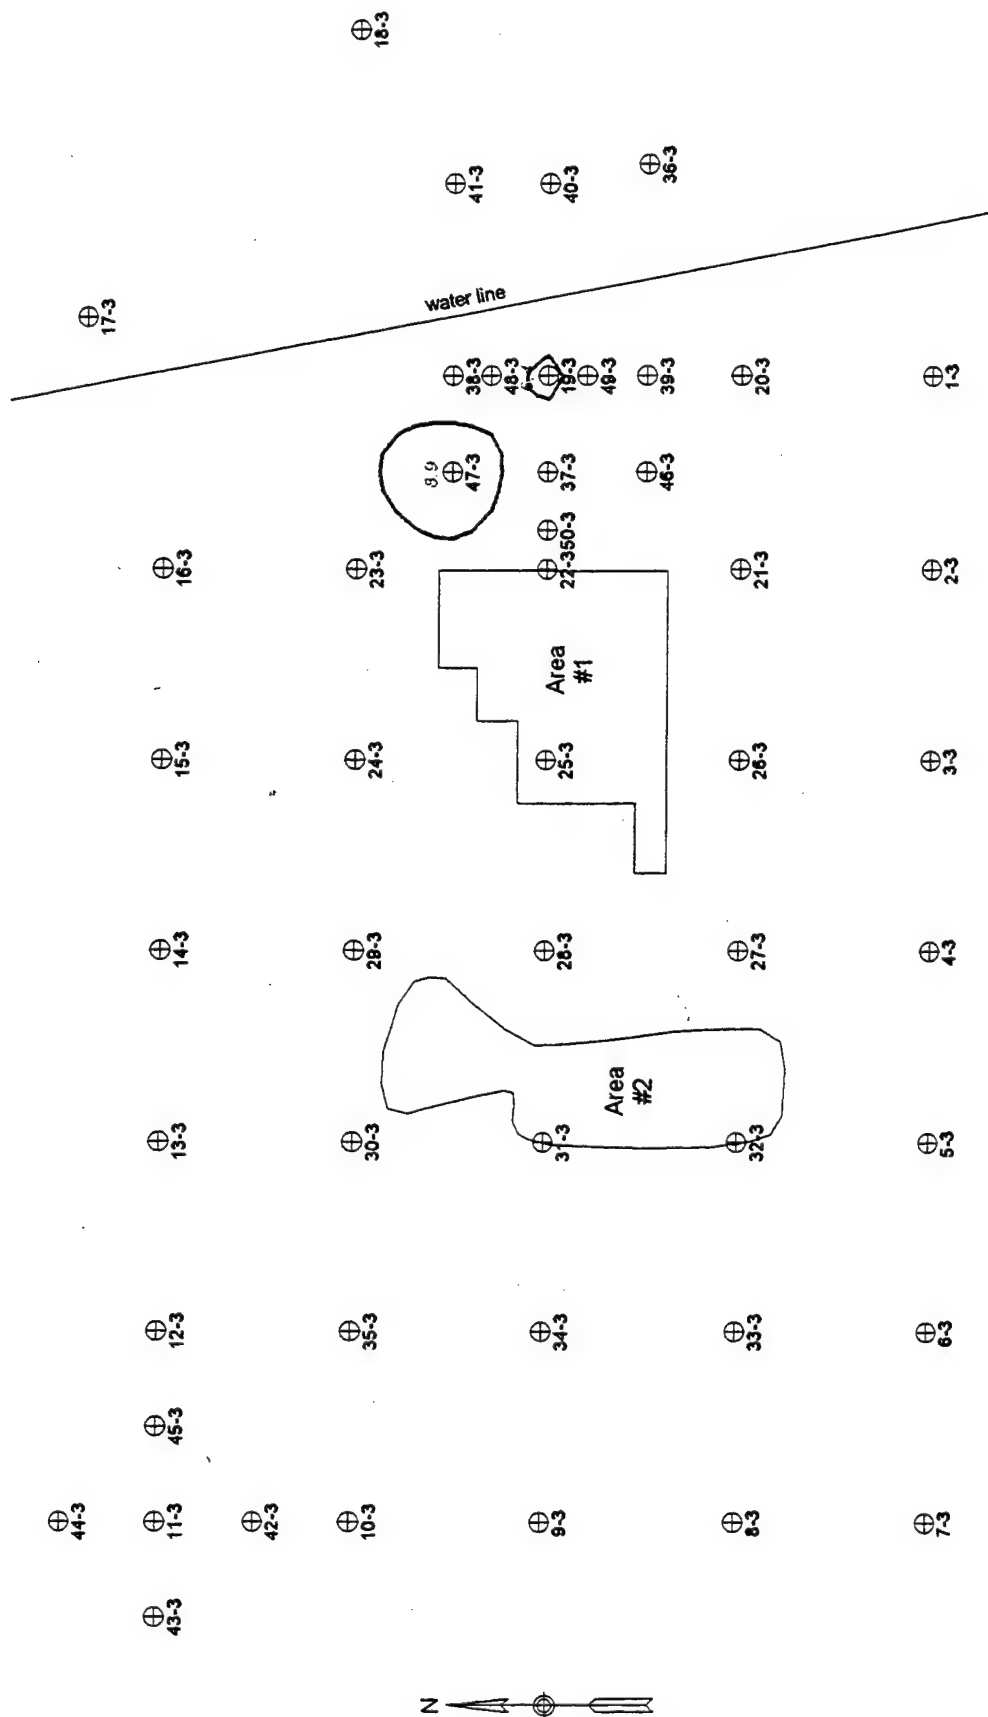

⊕ Soil Gas Sample Location

CONCENTRATION CONTOUR LINE



TARGET ENVIRONMENTAL SERVICES, INC.

FIGURE 11. Ethylbenzene (ug/l-v)

AREA 12 SITE SOIL GAS, 6'
SOUTH DAKOTA AIR NATIONAL GUARD STATION
SIOUX FALLS, SOUTH DAKOTA

This map is integral to a written report
and should be viewed in that context.

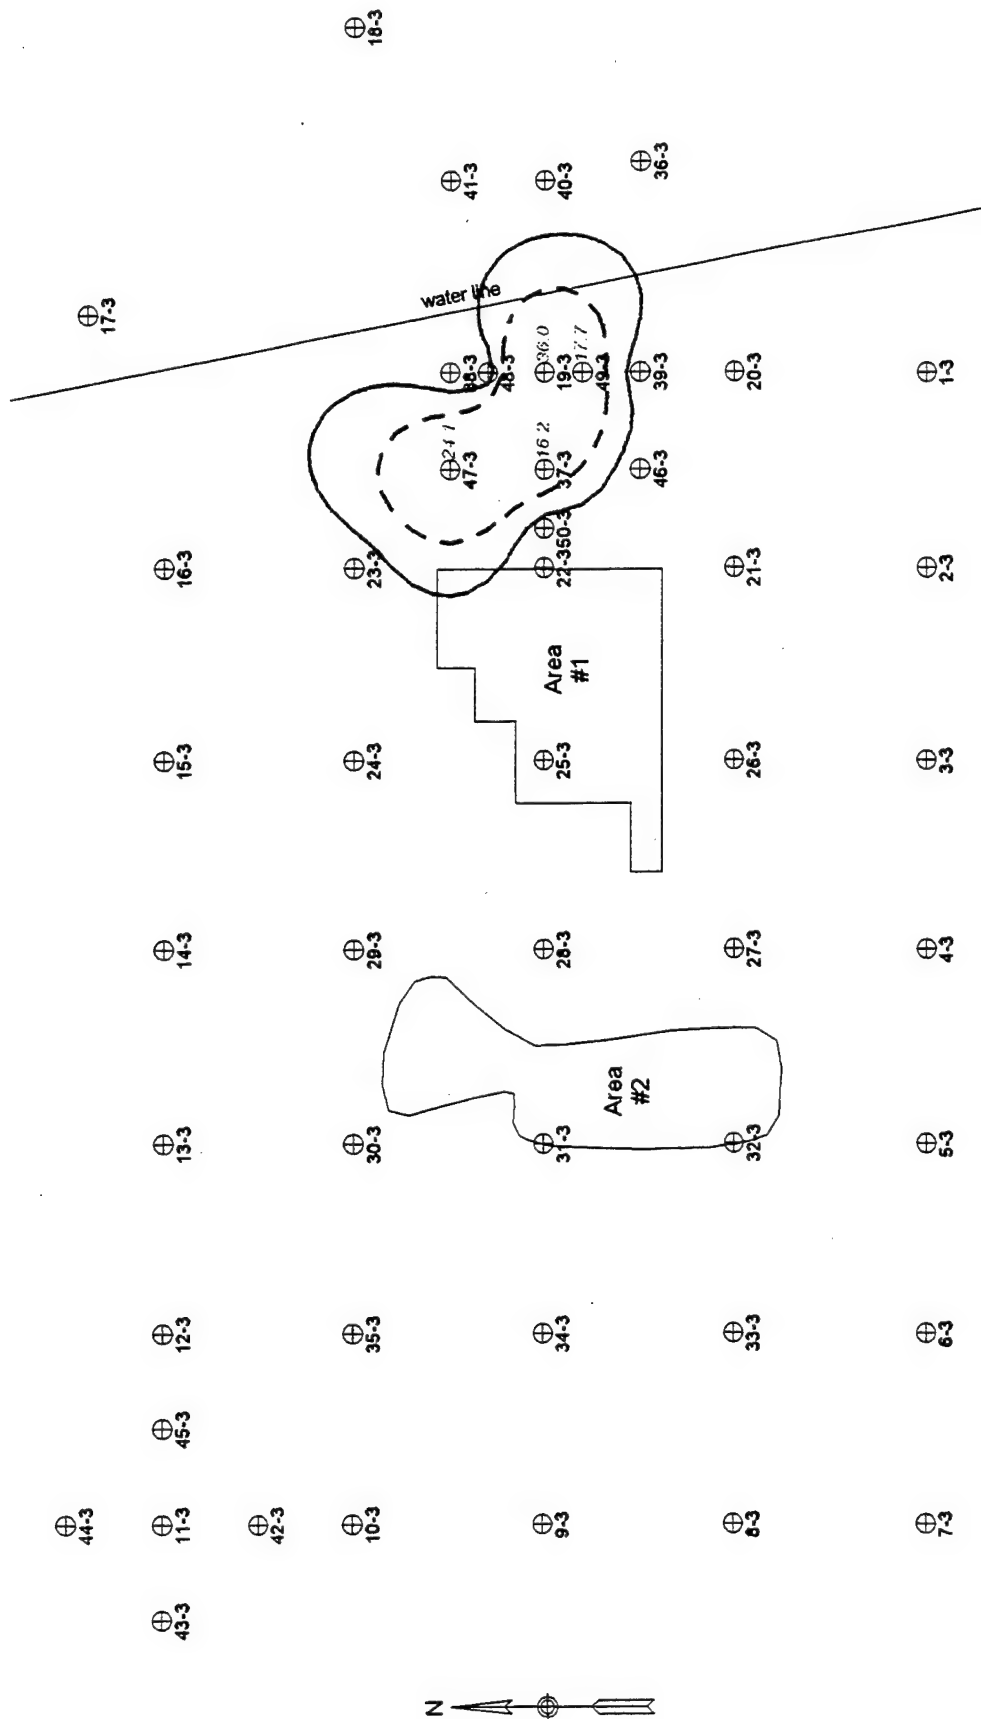


FIGURE 12. Xylenes (ug/l-v)
 AREA 12 SITE SOIL GAS, 6'
 SOUTH DAKOTA AIR NATIONAL GUARD STATION
 SIOUX FALLS, SOUTH DAKOTA

TARGET ENVIRONMENTAL SERVICES, INC.

This map is integral to a written report and should be viewed in that context.

10
+
GS03-2

+
GS02-2

+
GS01-2

+
GS05-2

+
GS04-2



+ Soil Sample Location



TARGET ENVIRONMENTAL SERVICES, INC.

This map is integral to a written report
and should be viewed in that context.

FIGURE 13. TPH - Diesel (mg/kg)

AREA 12 SITE SOIL, 2'-4'
SOUTH DAKOTA AIR NATIONAL GUARD STATION
SIOUX FALLS, SOUTH DAKOTA

+
GS03-2

+
GS02-2

+
GS01-2



5
+
GS05-2

+
GS04-2



+ Soil Sample Location



TARGET ENVIRONMENTAL SERVICES, INC.

This map is integral to a written report
and should be viewed in that context.

FIGURE 14. TPH - Diesel (mg/kg)

AREA 12 SITE SOIL, 4'-6'
SOUTH DAKOTA AIR NATIONAL GUARD STATION
SIOUX FALLS, SOUTH DAKOTA

+
GS03-3



+
GS02-3

+
GS01-3

10
+
GS05-3

+
GS04-3



+ Soil Sample Location



TARGET ENVIRONMENTAL SERVICES, INC.

This map is integral to a written report
and should be viewed in that context.

FIGURE 15. TPH - Diesel (mg/kg)

AREA 12 SITE SOIL, 6'-8'
SOUTH DAKOTA AIR NATIONAL GUARD STATION
SIOUX FALLS, SOUTH DAKOTA

Building

11

GW1306

GW1301

Building

12

GW1307

GW1302

GW1311

GW1308

4 5
GW1305

GW1303

GW1318

GW1312

GW1309

GW1304

GW1313

GW1310

GW1319

GW1314

GW1315

GW1320

GW1316

GW1317

Pumps



Tanks

□ Groundwater Sample Location



TARGET ENVIRONMENTAL SERVICES, INC.

This map is integral to a written report
and should be viewed in that context.

FIGURE 16. Benzene (ug/l)


AREA 13 SITE GROUNDWATER
SOUTH DAKOTA AIR NATIONAL GUARD BASE
SIOUX FALLS, SOUTH DAKOTA

Building

11

Building


12

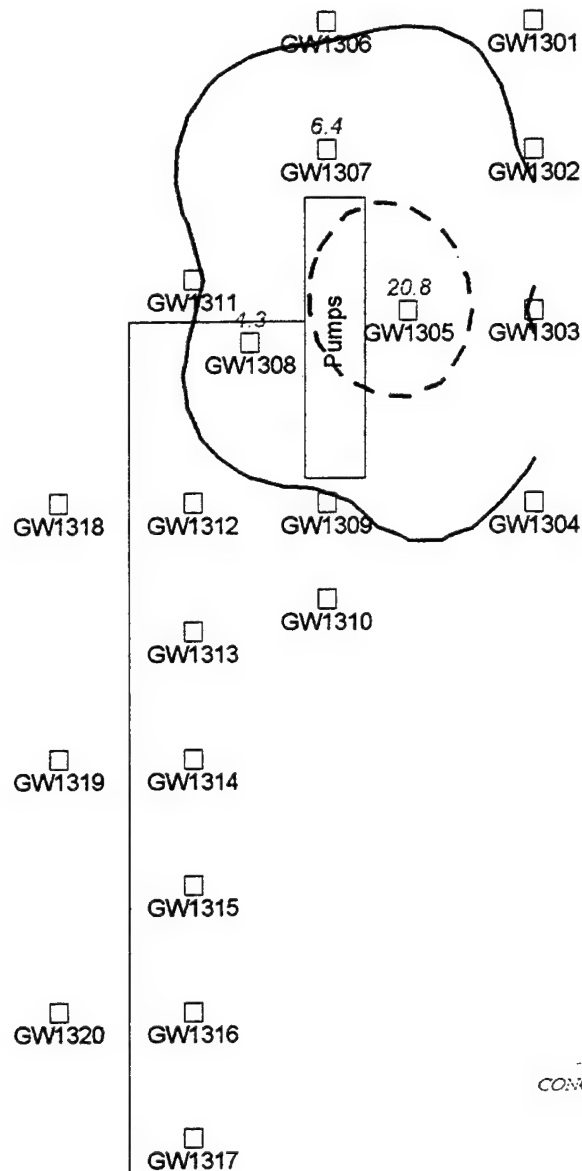

CONCENTRATION CONTOUR KEY

1 ———
10 - - - -

□ Groundwater Sample Location



Tanks




TARGET ENVIRONMENTAL SERVICES, INC.

This map is integral to a written report
and should be viewed in that context.

FIGURE 17. Toluene (ug/l)

AREA 13 SITE GROUNDWATER
SOUTH DAKOTA AIR NATIONAL GUARD BASE
SIOUX FALLS, SOUTH DAKOTA

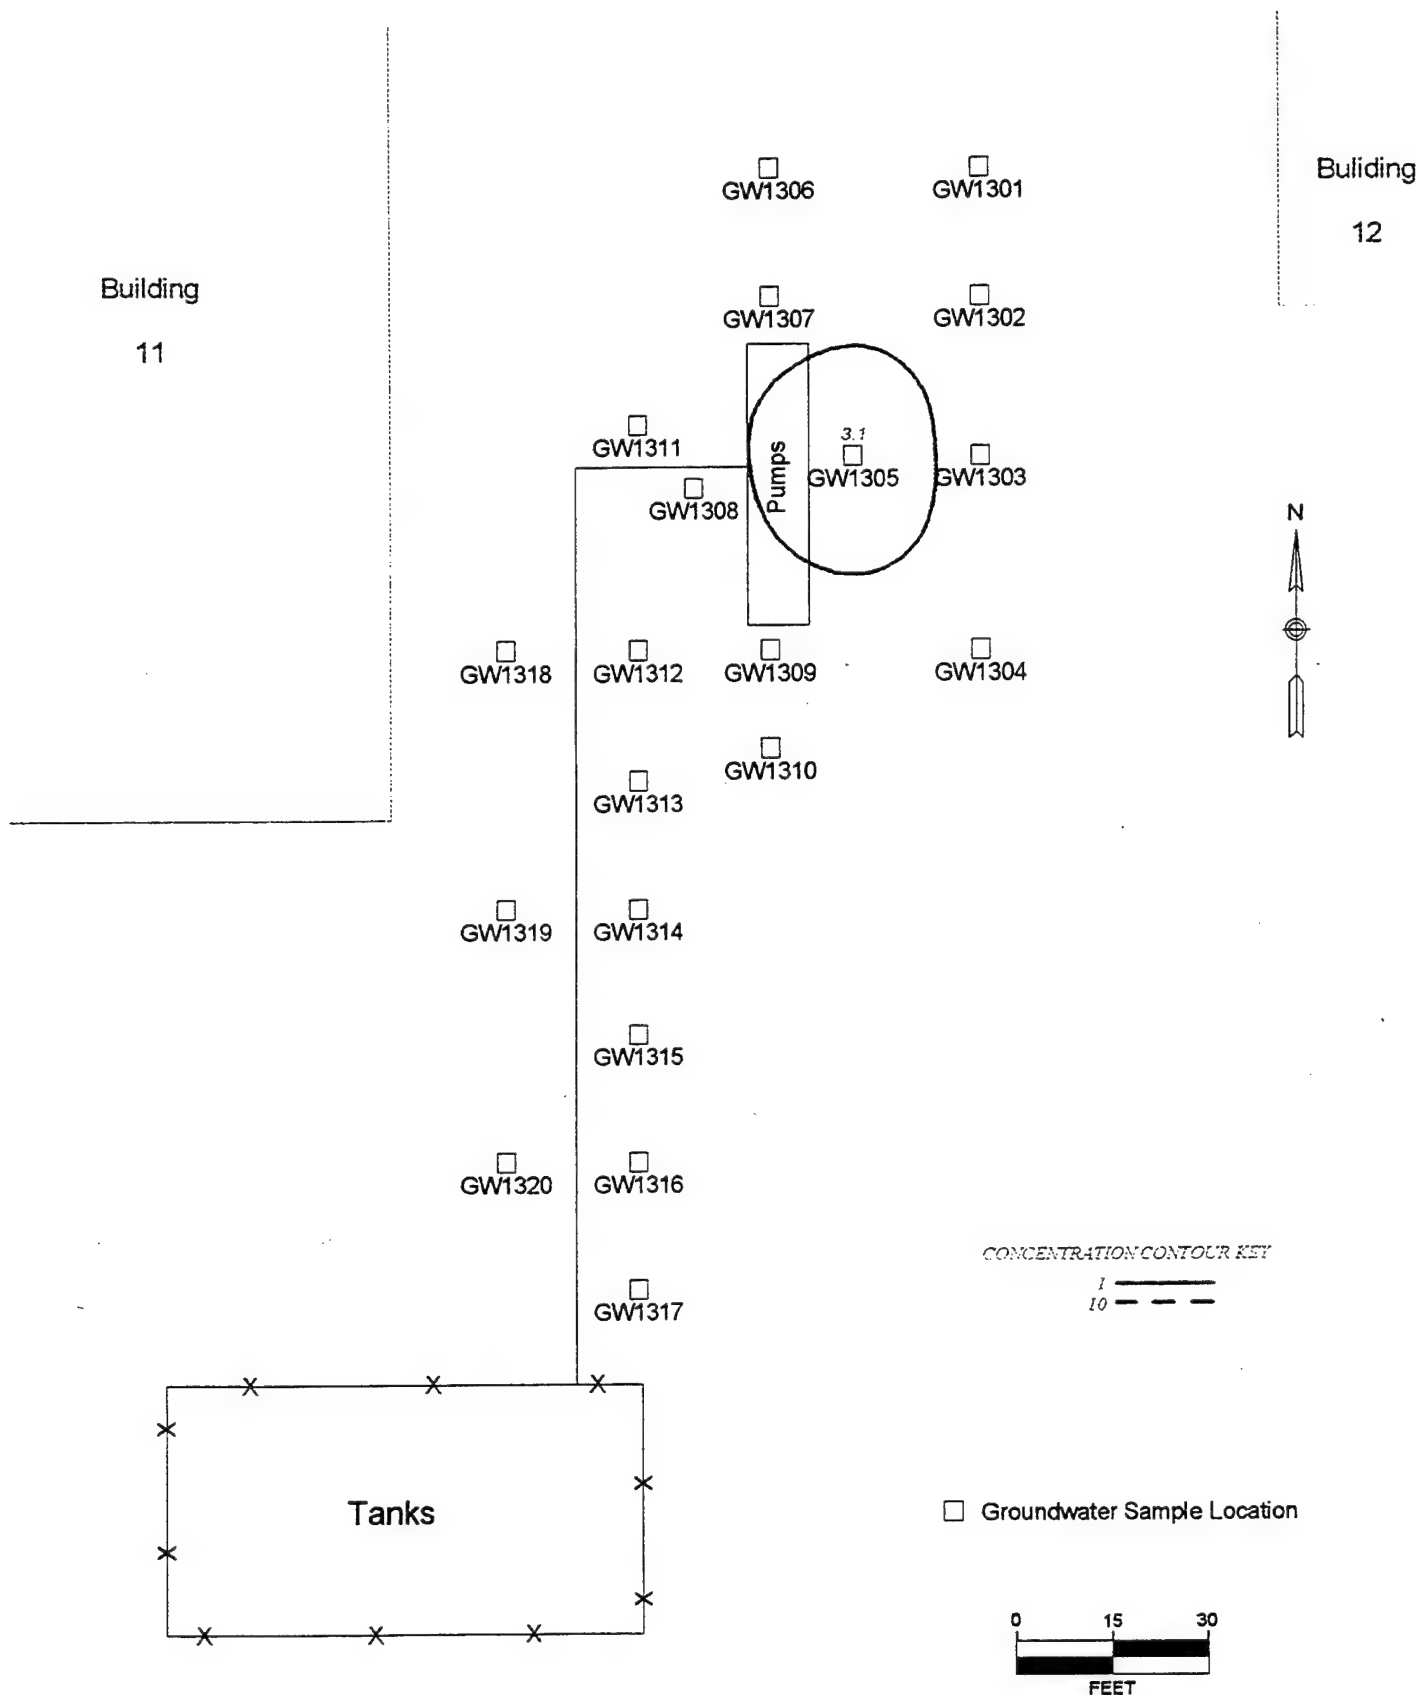

TARGET ENVIRONMENTAL SERVICES, INC.

This map is integral to a written report
and should be viewed in that context.

FIGURE 18. Ethylbenzene (ug/l)


AREA 13 SITE GROUNDWATER
SOUTH DAKOTA AIR NATIONAL GUARD BASE
SIOUX FALLS, SOUTH DAKOTA

Building

11

Building

12

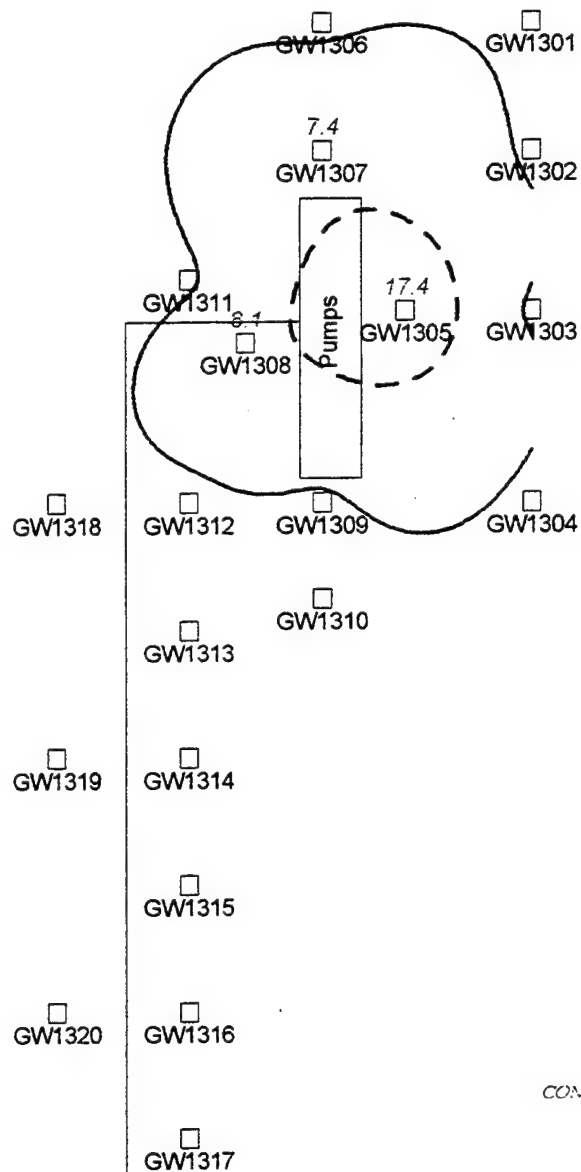

CONCENTRATION CONTOUR KEY

1 ———
10 - - -

□ Groundwater Sample Location

0 15 30
FEET



TARGET ENVIRONMENTAL SERVICES, INC.

This map is integral to a written report
and should be viewed in that context.

FIGURE 19. Xylenes (ug/l)

AREA 13 SITE GROUNDWATER
SOUTH DAKOTA AIR NATIONAL GUARD BASE
SIOUX FALLS, SOUTH DAKOTA

Soil Gas
FINAL DATA
 SAIC Project # 01-0827-04-3423-008 @
 South Dakota Air National Guard Station
 Sioux Falls, SD

UNITS = microgram per liter of air (ug/L of Air)

DETECTION LIMIT = 4.00 ug/L of Air

<u>SAMPLE ID</u>	<u>DATE</u>	<u>TPH</u>	<u>BENZ</u>	<u>TOL</u>	<u>EBENZ</u>	<u>TOTAL XYLENES</u>	<u>SOLVENT</u>
500 BLK	6/8/95	ND	ND	ND	ND	ND	ND
SG1-1	6/8/95	ND	ND	ND	ND	ND	ND
SG1-1 DUP	6/8/95	ND	ND	ND	ND	ND	ND
SG1-2	6/8/95	ND	ND	ND	ND	ND	ND
SG1-3	6/8/95	ND	ND	ND	ND	ND	ND
SG1-4	6/8/95	ND	ND	ND	ND	ND	ND
SG2-1	6/8/95	ND	ND	ND	ND	ND	ND
SG2-2	6/8/95	ND	ND	ND	ND	ND	ND
SG2-3	6/8/95	ND	ND	ND	ND	ND	ND
SG2-4	6/8/95	ND	ND	ND	ND	ND	ND
SG3-1	6/8/95	ND	ND	ND	ND	ND	ND
SG3-2	6/8/95	ND	ND	ND	ND	ND	ND
SG3-3	6/8/95	ND	ND	ND	ND	ND	ND
SG3-3D	6/8/95	ND	ND	ND	ND	ND	ND
SG3-4	6/8/95	ND	ND	ND	ND	ND	ND
SG4-1	6/8/95	ND	ND	ND	ND	ND	ND
SG4-2	6/8/95	ND	ND	ND	ND	ND	ND
SG4-3	6/8/95	ND	ND	ND	ND	ND	ND
SG4-4	6/8/95	ND	ND	ND	ND	ND	ND
SG5-1	6/8/95	ND	ND	ND	ND	ND	ND
SG5-2	6/8/95	ND	ND	ND	ND	ND	ND
SG5-3	6/8/95	ND	ND	ND	ND	ND	ND
SG5-4	6/8/95	ND	ND	ND	ND	ND	ND
501 BLK	6/9/95	ND	ND	ND	ND	ND	ND
502 BLK	6/9/95	ND	ND	ND	ND	ND	
SG12 1-1	6/9/95	ND	ND	ND	ND	ND	
SG12 1-2	6/9/95	ND	ND	ND	ND	ND	
SG12 1-3	6/9/95	ND	ND	ND	ND	ND	
SG12 1-4	6/9/95	ND	ND	ND	ND	ND	
SG12 2-1	6/9/95	ND	ND	ND	ND	ND	
SG12 2-2	6/9/95	ND	ND	ND	ND	ND	
SG12 2-3	6/9/95	ND	ND	ND	ND	ND	
SG12 2-4	6/9/95	ND	ND	ND	ND	ND	
SG12 3-1	6/9/95	ND	ND	ND	ND	ND	
SG12 3-2	6/9/95	ND	ND	ND	ND	ND	
SG12 3-3	6/9/95	ND	ND	ND	ND	ND	
SG12 4-1	6/9/95	ND	ND	ND	ND	ND	
SG12 4-2	6/9/95	ND	ND	ND	ND	ND	
SG12 4-3	6/9/95	ND	ND	ND	ND	ND	
SG12 5-1	6/9/95	ND	ND	ND	ND	ND	
SG12 5-2	6/9/95	ND	ND	ND	ND	ND	
SG12 5-3	6/9/95	ND	ND	ND	ND	ND	
SG12 6-1	6/9/95	ND	ND	ND	ND	ND	
SG12 6-2	6/9/95	ND	ND	ND	ND	ND	
SG12 6-3	6/9/95	ND	ND	ND	ND	ND	
SG12 7-1	6/9/95	ND	ND	ND	ND	ND	
SG12 7-2	6/9/95	ND	ND	ND	ND	ND	
SG12 7-3	6/9/95	ND	ND	ND	ND	ND	
SG12 11-1	6/9/95	ND	ND	ND	ND	ND	
SG12 11-1 DUP	6/9/95	ND	ND	ND	ND	ND	
SG12 11-2	6/9/95	ND	ND	ND	ND	ND	
SG12 11-3	6/9/95	ND	ND	ND	ND	ND	
503 BLK	6/9/95	ND	ND	ND	ND	ND	
504 BLK	6/9/95	ND	ND	ND	ND	ND	

Soil Gas
FINAL DATA
 SAIC Project # 01-0827-04-3423-008 @
 South Dakota Air National Guard Station
 Sioux Falls, SD

UNITS = microgram per liter of air (ug/L of Air)

DETECTION LIMIT = 4.00 ug/L of Air

<u>SAMPLE ID</u>	<u>DATE</u>	<u>TPH</u>	<u>BENZ</u>	<u>TOL</u>	<u>EBENZ</u>	<u>TOTAL XYLENES</u>
505 BLK	6/10/95	ND	ND	ND	ND	ND
SG12 10-1	6/10/95	ND	ND	ND	ND	ND
SG12 10-2	6/10/95	ND	ND	ND	ND	ND
SG12 10-3	6/10/95	ND	ND	ND	ND	ND
SG12 9-1	6/10/95	ND	ND	ND	ND	ND
SG12 9-2	6/10/95	ND	ND	ND	ND	ND
SG12 9-3	6/10/95	ND	ND	ND	ND	ND
SG12 8-1	6/10/95	ND	ND	ND	ND	ND
SG12 8-2	6/10/95	ND	ND	ND	ND	ND
SG12 8-3	6/10/95	ND	ND	ND	ND	ND
SG12 12-1	6/10/95	ND	ND	ND	ND	ND
SG12 12-2	6/10/95	ND	ND	ND	ND	ND
SG12 12-3	6/10/95	ND	ND	ND	ND	ND
SG12 13-1	6/10/95	ND	ND	ND	ND	ND
SG12 13-2	6/10/95	ND	ND	ND	ND	ND
SG12 13-3	6/10/95	ND	ND	ND	ND	ND
SG12 14-1	6/10/95	ND	ND	ND	ND	ND
SG12 14-2	6/10/95	ND	ND	ND	ND	ND
SG12 14-3	6/10/95	ND	ND	ND	ND	ND
SG12 15-1	6/10/95	ND	ND	ND	ND	ND
SG12 15-2	6/10/95	ND	ND	ND	ND	ND
506 BLK	6/10/95	ND	ND	ND	ND	ND
SG12 15-3	6/10/95	ND	ND	ND	ND	ND
SG12 16-1	6/10/95	ND	ND	ND	ND	ND
SG12 16-2	6/10/95	ND	ND	ND	ND	ND
SG12 16-3	6/10/95	ND	ND	ND	ND	ND
SG12 17-1	6/10/95	ND	ND	ND	ND	ND
SG12 17-2	6/10/95	ND	ND	ND	ND	ND
SG12 17-3	6/10/95	ND	ND	ND	ND	ND
SG12 18-1	6/10/95	ND	ND	ND	ND	ND
SG12 18-2	6/10/95	ND	ND	ND	ND	ND
SG12 18-3	6/10/95	ND	ND	ND	ND	ND
SG12 18-3DUP	6/10/95	ND	ND	ND	ND	ND
SG12 19-1	6/10/95	ND	ND	ND	ND	ND
SG12 19-2	6/10/95	391.73	ND	ND	10.56	59.20
SG12 19-2DUP	6/10/95	355.25	ND	ND	7.11	55.94
SG12 19-3	6/10/95	251.93	ND	ND	6.36	36.00
SG12 19-3DUP	6/10/95	173.73	ND	ND	5.57	24.74
SG12 20-1	6/10/95	ND	ND	ND	ND	ND
SG12 20-2	6/10/95	ND	ND	ND	ND	ND
SG12 20-3	6/10/95	ND	ND	ND	ND	ND
SG12 21-1	6/10/95	ND	ND	ND	ND	ND
SG12 21-2	6/10/95	ND	ND	ND	ND	ND
SG12 21-3	6/10/95	ND	ND	ND	ND	ND
SG12 22-1	6/10/95	ND	ND	ND	ND	ND
507 BLK	6/10/95	ND	ND	ND	ND	ND
SG12 22-2	6/10/95	ND	ND	ND	ND	ND
SG12 22-3	6/10/95	ND	ND	ND	ND	ND
SG12 23-1	6/10/95	ND	ND	ND	ND	ND
SG12 23-2	6/10/95	ND	ND	ND	ND	ND
SG12 23-3	6/10/95	ND	ND	ND	ND	ND
SG12 24-1	6/10/95	ND	ND	ND	ND	ND
SG12 24-2	6/10/95	ND	ND	ND	ND	ND
SG12 24-3	6/10/95	ND	ND	ND	ND	ND
SG12 25-1	6/10/95	ND	ND	ND	ND	ND
SG12 25-2	6/10/95	ND	ND	ND	ND	ND
SG12 25-3	6/10/95	ND	ND	ND	ND	ND
508 BLK	6/10/95	ND	ND	ND	ND	ND

Soil Gas
FINAL DATA
 SAIC Project # 01-0827-04-3423-008 @
 South Dakota Air National Guard Station
 Sioux Falls, SD

UNITS = microgram per liter of air (ug/L of Air)

DETECTION LIMIT = 4.00 ug/L of Air

<u>SAMPLE ID</u>	<u>DATE</u>	<u>TPH</u>	<u>BENZ</u>	<u>TOL</u>	<u>EBENZ</u>	<u>TOTAL XYLENES</u>
509 BLK	6/11/95	ND	ND	ND	ND	ND
SG12 26-1	6/11/95	ND	ND	ND	ND	ND
SG12 26-2	6/11/95	ND	ND	ND	ND	ND
SG12 26-3	6/11/95	ND	ND	ND	ND	ND
SG12 27-1	6/11/95	ND	ND	ND	ND	ND
SG12 27-2	6/11/95	ND	ND	ND	ND	ND
SG12 27-3	6/11/95	ND	ND	ND	ND	ND
SG12 28-1	6/11/95	ND	ND	ND	ND	ND
SG12 28-2	6/11/95	ND	ND	ND	ND	ND
SG12 28-3	6/11/95	ND	ND	ND	ND	ND
SG12 29-1	6/11/95	ND	ND	ND	ND	ND
SG12 29-2	6/11/95	ND	ND	ND	ND	ND
SG12 29-3	6/11/95	ND	ND	ND	ND	ND
SG12 30-1	6/11/95	ND	ND	ND	ND	ND
SG12 30-2	6/11/95	ND	ND	ND	ND	ND
SG12 30-3	6/11/95	ND	ND	ND	ND	ND
SG12 31-1	6/11/95	ND	ND	ND	ND	ND
SG12 31-2	6/11/95	ND	ND	ND	ND	ND
SG12 31-3	6/11/95	ND	ND	ND	ND	ND
SG12 32-1	6/11/95	ND	ND	ND	ND	ND
SG12 32-2	6/11/95	ND	ND	ND	ND	ND
SG12 32-3	6/11/95	ND	ND	ND	ND	ND
510 BLK	6/11/95	ND	ND	ND	ND	ND
SG12 33-1	6/11/95	ND	ND	ND	ND	ND
SG12 33-2	6/11/95	ND	ND	ND	ND	ND
SG12 33-3	6/11/95	ND	ND	ND	ND	ND
SG12 34-1	6/11/95	ND	ND	ND	ND	ND
SG12 34-2	6/11/95	ND	ND	ND	ND	ND
SG12 34-3	6/11/95	ND	ND	ND	ND	ND
SG12 35-1	6/11/95	ND	ND	ND	ND	ND
SG12 35-2	6/11/95	ND	ND	ND	ND	ND
SG12 35-3	6/11/95	ND	ND	ND	ND	ND
SG12 36-1	6/11/95	ND	ND	ND	ND	ND
SG12 36-2	6/11/95	ND	ND	ND	ND	ND
SG12 36-3	6/11/95	ND	ND	ND	ND	ND
SG12 40-1	6/11/95	ND	ND	ND	ND	ND
SG12 40-2	6/11/95	ND	ND	ND	ND	ND
SG12 40-3	6/11/95	ND	ND	ND	ND	ND
SG12 41-1	6/11/95	ND	ND	ND	ND	ND
SG12 41-2	6/11/95	ND	ND	ND	ND	ND
SG12 41-3	6/11/95	ND	ND	ND	ND	ND
SG12 38-1	6/11/95	ND	ND	ND	ND	ND
SG12 38-2	6/11/95	ND	ND	ND	ND	ND
SG12 38-3	6/11/95	ND	ND	ND	ND	ND
SG12 39-1	6/11/95	ND	ND	ND	ND	ND
SG12 39-2	6/11/95	ND	ND	ND	ND	ND
SG12 39-3	6/11/95	ND	ND	ND	ND	ND
SG12 37-1	6/11/95	ND	ND	ND	ND	ND
SG12 37-2	6/11/95	5.03	ND	ND	ND	ND
SG12 37-3	6/11/95	60.26	ND	ND	ND	16.17
SG12 37-3 DUP	6/11/95	56.27	ND	ND	ND	14.51
SG12 37-3DUP2	6/11/95	47.22	ND	ND	ND	12.33
SG12 44-1	6/11/95	ND	ND	ND	ND	ND
SG12 44-2	6/11/95	ND	ND	ND	ND	ND
SG12 44-3	6/11/95	ND	ND	ND	ND	ND
511 BLK	6/11/95	ND	ND	ND	ND	ND

Soil Gas
FINAL DATA
 SAIC Project # 01-0827-04-3423-008 @
 South Dakota Air National Guard Station
 Sioux Falls, SD

UNITS = microgram per liter of air (ug/L of Air)

DETECTION LIMIT = 4.00 ug/L of Air

<u>SAMPLE ID</u>	<u>DATE</u>	<u>TPH</u>	<u>BENZ</u>	<u>TOL</u>	<u>EBENZ</u>	<u>TOTAL XYLENES</u>
512 BLK	6/12/95	ND	ND	ND	ND	ND
SG12 42-1	6/12/95	ND	ND	ND	ND	ND
SG12 42-2	6/12/95	ND	ND	ND	ND	ND
SG12 42-3	6/12/95	ND	ND	ND	ND	ND
SG12 43-1	6/12/95	4.07	ND	ND	ND	ND
SG12 43-2	6/12/95	ND	ND	ND	ND	ND
SG12 43-3	6/12/95	ND	ND	ND	ND	ND
SG12 45-1	6/12/95	ND	ND	ND	ND	ND
SG12 45-2	6/12/95	ND	ND	ND	ND	ND
SG12 45-3	6/12/95	ND	ND	ND	ND	ND
SG12 48-1	6/12/95	ND	ND	ND	ND	ND
SG12 48-2	6/12/95	ND	ND	ND	ND	ND
SG12 48-3	6/12/95	ND	ND	ND	ND	ND
SG12 47-1	6/12/95	3.84	ND	ND	ND	ND
SG12 47-2	6/12/95	37.18	ND	ND	5.04	14.68
SG12 47-3	6/12/95	71.99	ND	ND	8.94	24.10
SG12 47-3 DUP	6/12/95	56.53	ND	ND	13.75	24.25
SG12 50-1	6/12/95	141.16	ND	ND	19.37	34.86
SG12 50-1 DUP	6/12/95	88.92	ND	ND	11.28	22.93
SG12 50-2	6/12/95	83.70	ND	ND	11.79	23.63
SG12 50-3	6/12/95	8.42	ND	ND	ND	ND
SG12 46-1	6/12/95	6.34	ND	ND	ND	ND
SG12 46-2	6/12/95	ND	ND	ND	ND	ND
SG12 46-3	6/12/95	6.20	ND	ND	ND	ND
SG12 49-1	6/12/95	ND	ND	ND	ND	ND
SG12 49-2	6/12/95	44.60	ND	ND	4.69	18.16
SG12 49-3	6/12/95	40.71	ND	ND	ND	17.69
513 BLK	6/12/95	ND	ND	ND	ND	ND

<u>SAMPLE ID</u>	<u>DATE</u>	<u>TPH</u>	<u>BENZ</u>	<u>TOL</u>	<u>EBENZ</u>	<u>TOTAL XYLENES</u>	<u>SOLVENT</u>
515 BLK	6/14/95	ND	ND	ND	ND	ND	ND
SG13 6-1	6/14/95	ND	ND	ND	ND	ND	ND
SG13 6-2	6/14/95	ND	ND	ND	ND	ND	ND
SG13 6-3	6/14/95	ND	ND	ND	ND	ND	ND

FINAL QC DATA
 SAIC Project # 01-0827-04-3423-008 @
 South Dakota Air National Guard Station
 Sioux Falls, SD

UNITS = microgram per liter of air (ug/L of Air)

DETECTION LIMIT = 4.00 ug/L of Air

Duplicate Analysis

<u>SAMPLE ID</u>	<u>DATE</u>	<u>TPH</u>	<u>BENZ</u>	<u>TOL</u>	<u>EBENZ</u>	<u>TOTAL XYLENES</u>	<u>SOLVENT</u>
SG1-1	6/8/95	ND	ND	ND	ND	ND	ND
SG1-1 DUP	6/8/95	ND	ND	ND	ND	ND	ND
	RPD	N/A	N/A	N/A	N/A	N/A	N/A
SG12 11-1	6/9/95	ND	ND	ND	ND	0.70	
SG12 11-1 DUP	6/9/95	ND	ND	ND	ND	0.71	
	RPD	N/A	N/A	N/A	N/A	1%	

Soil Gas
FINAL QC DATA
 SAIC Project # 01-0827-04-3423-008 @
 South Dakota Air National Guard Station
 Sioux Falls, SD

UNITS = microgram per liter of air (ug/L of Air)

DETECTION LIMIT = 4.00 ug/L of Air

Duplicate Analysis

<u>SAMPLE ID</u>	<u>DATE</u>	<u>TPH</u>	<u>BENZ</u>	<u>TOL</u>	<u>EBENZ</u>	<u>TOTAL XYLENES</u>
SG12 18-3	6/10/95	ND	ND	ND	ND	ND
SG12 18-3DUP	6/10/95	ND	ND	ND	ND	ND
	RPD	N/A	N/A	N/A	N/A	N/A
SG12 19-2	6/10/95	391.73	ND	ND	10.56	59.20
SG12 19-2DUP	6/10/95	355.25	ND	ND	7.11	55.94
	RPD	10%	N/A	N/A	39%	6%
SG12 19-3	6/10/95	251.93	ND	ND	6.36	36.00
SG12 19-3DUP	6/10/95	173.73	ND	ND	5.57	24.74
	RPD	37%	N/A	N/A	13%	37%
SG12 37-3	6/11/95	60.26	ND	ND	ND	16.17
SG12 37-3 DUP	6/11/95	56.27	ND	ND	ND	14.51
	RPD	7%	N/A	N/A	N/A	11%
SG12 37-3	6/11/95	60.26	ND	ND	ND	16.17
SG12 37-3DUP2	6/11/95	47.22	ND	ND	ND	12.33
	RPD	24%	N/A	N/A	N/A	27%
SG12 47-3	6/12/95	71.99	ND	ND	8.94	24.10
SG12 47-3 DUP	6/12/95	56.53	ND	ND	13.75	24.25
	RPD	24%	N/A	N/A	42%	1%
SG12 50-1	6/12/95	141.16	ND	ND	19.37	34.86
SG12 50-1 DUP	6/12/95	88.92	ND	ND	11.28	22.93
	RPD	45%	N/A	N/A	53%	41%

Opening and Closing Standards Analysis

<u>SAMPLE ID</u>	<u>DATE</u>	<u>TPH</u>	<u>BENZ</u>	<u>TOL</u>	<u>EBENZ</u>	<u>M- & P- XYLENES</u>	<u>O- XYLENE</u>
OPENING STD	6/8/95	99.08	30.52	35.54	48.14	90.98	45.93
CLOSING STD	6/8/95	77.52	26.11	27.28	30.56	69.94	37.96
	RPD (%)	24%	16%	26%	45%	26%	19%
OPENING STD	6/9/95	99.08	30.52	35.54	48.14	90.98	45.93
CLOSING STD	6/9/95	79.65	48.52	73.95	107.77	223.02	113.55
	RPD (%)	22%	46%	70%	76%	84%	85%
OPENING STD	6/10/95	99.08	30.52	35.54	48.14	90.98	45.93
CLOSING STD	6/10/95	119.17	38.01	32.85	39.10	66.99	33.64
	RPD (%)	18%	22%	8%	21%	30%	31%
OPENING STD	6/11/95	99.08	30.52	35.54	48.14	90.98	45.93
CLOSING STD	6/11/95	90.45	32.99	40.23	61.59	100.62	54.04
	RPD (%)	9%	8%	12%	25%	10%	16%
OPENING STD	6/12/95	99.08	30.52	35.54	48.14	90.98	45.93
CLOSING STD	6/12/95	99.42	38.29	51.64	74.49	79.42	72.82
	RPD (%)	0%	23%	37%	43%	14%	45%
OPENING STD	6/14/95	99.08	30.52	35.54	48.14	90.98	45.93
CLOSING STD	6/14/95	89.14	30.41	36.55	64.56	96.13	44.26
	RPD (%)	11%	0%	3%	29%	5%	4%

Soil Gas
FINAL QC DATA
 SAIC Project # 01-0827-04-3423-008 @
 South Dakota Air National Guard Station
 Sioux Falls, SD

UNITS = microgram per liter of air (ug/L of Air)

DETECTION LIMIT = 4.00 ug/L of Air

<u>Solvent Analyte</u>	<u>Solvent Calibration</u>			<u>Solvent Duplicate Analyses</u>		
	<u>Ave. RF</u> <u>from 3-pt.</u>	<u>SD of RF</u> <u>from 3-pt.</u>	<u>RSD (%)</u>	<u>SG1-1</u>	<u>SG1-1DUP</u>	<u>RPD (%)</u>
1,1-Dichloroethene	324.03	84.31	26.0%	ND	ND	N/A
Methylene Chloride	459.83	130.34	28.3%	ND	ND	N/A
trans-1,2-Dichloroethene	393.95	59.68	15.1%	ND	ND	N/A
1,1-Dichloroethane	728.95	155.98	21.4%	ND	ND	N/A
cis-1,2-Dichloroethene	510.07	150.06	29.4%	ND	ND	N/A
Chloroform	808.28	207.61	25.7%	ND	ND	N/A
1,1,1-Trichloroethane	575.85	133.73	23.2%	ND	ND	N/A
Carbon Tetrachloride	841.40	230.10	27.3%	ND	ND	N/A
1,2-Dichloroethane	803.11	204.11	25.4%	ND	ND	N/A
Benzene	28.73	5.92	20.6%	ND	ND	N/A
Trichloroethene	463.89	68.55	14.8%	ND	ND	N/A
Toluene	25.07	4.19	16.7%	ND	ND	N/A
1,1,2-Trichloroethane	778.30	209.51	26.9%	ND	ND	N/A
Tetrachloroethene	341.44	37.58	11.0%	ND	ND	N/A
Chlorobenzene	172.63	15.83	9.2%	ND	ND	N/A
1,1,1,2-Tetrachloroethane	854.09	231.08	27.1%	ND	ND	N/A
Ethylbenzene	20.47	3.35	16.4%	ND	ND	N/A
m- & p-Xylene	22.63	3.47	15.4%	ND	ND	N/A
o-Xylene	21.39	3.16	14.8%	ND	ND	N/A
1,1,2,2-Tetrachloroethane	772.91	206.19	26.7%	ND	ND	N/A

Calibration Date: 6/8/95

Dup. Analysis: 6/8/95

ANALYSES PERFORMED IN TEG-MIDWEST'S MOBILE LABORATORY

ANALYSES PERFORMED BY: MR. JEFFREY E. FILKINS

DATA REVIEWED BY: MR. JEFFREY E. FILKINS 7/7/95

Area 12 - Soils
FINAL DATA
 SAIC Project # 01-0827-04-3423-008 @
 South Dakota Air National Guard Station
 Sioux Falls, SD

TEG Project #950607MW

TPH (Mod. EPA Method 8015) & BTEX (EPA Method 8020) ANALYSES OF SOILS

SAMPLE NUMBER	DATE ANALYZED	TPH-GAS (PH-DIESEL (C5-C12) (C13-C24) BENZENE TOLUENE THYLBEN. XYLENES					TOTAL (mg/kg)
		(mg/kg)	(mg/kg)	(mg/kg)	(mg/kg)	(mg/kg)	
REAGENT BLAN.	06/13/95	ND	ND	ND	ND	ND	ND
GS01-1	06/13/95	ND	ND	ND	ND	ND	ND
GS01-2	06/13/95	ND	ND	ND	ND	ND	ND
GS01-3	06/13/95	ND	ND	ND	ND	ND	ND
GS02-1	06/13/95	ND	ND	ND	ND	ND	ND
GS02-2	06/13/95	ND	ND	ND	ND	ND	ND
GS02-3	06/13/95	ND	ND	ND	ND	ND	ND
GS03-1	06/13/95	ND	10	ND	ND	ND	ND
GS03-2	06/13/95	ND	ND	ND	ND	ND	ND
GS03-3	06/13/95	ND	ND	ND	ND	ND	ND
GS04-1	06/13/95	ND	ND	ND	ND	ND	ND
GS04-2	06/13/95	ND	ND	ND	ND	ND	ND
GS04-3	06/13/95	ND	ND	ND	ND	ND	ND
GS05-1	06/13/95	ND	ND	ND	ND	ND	ND
GS05-2	06/13/95	ND	5	ND	ND	ND	ND
GS05-2 DUP	06/13/95	ND	7	ND	ND	ND	ND
GS05-3	06/13/95	ND	10	ND	ND	ND	ND
DETECTION LIMITS		5.0	5.0	0.10	0.10	0.10	0.10

ND INDICATES NOT DETECTED AT LISTED DETECTION LIMITS

QC DATA - MATRIX SPIKE ANALYSIS - SOILS (mg/kg)

Spiked Conc.	06/13/95	200	500	1.000	1.000	1.000	3.000
Measured Conc.		250	623	1.125	1.221	1.147	3.891
% Recovery		125.0%	124.6%	112.5%	122.1%	114.7%	129.7%
Spiked Conc.	06/13/95	200	500	1.000	1.000	1.000	3.000
Measured Conc.		212	544	0.893	0.980	0.955	3.059
% Recovery		106.0%	108.8%	89.3%	98.0%	95.5%	102.0%
RPD		16.5%	13.5%	23.0%	21.9%	18.3%	23.9%

ACCEPTABLE RECOVERY LIMITS: 65% TO 135%

ANALYSES PERFORMED IN TEG-MIDWEST'S MOBILE LABORATORY

ANALYSES PERFORMED BY: MR. JEFFREY E. FILKINS

DATA REVIEWED BY: MR. JEFFREY E. FILKINS 06/14/95

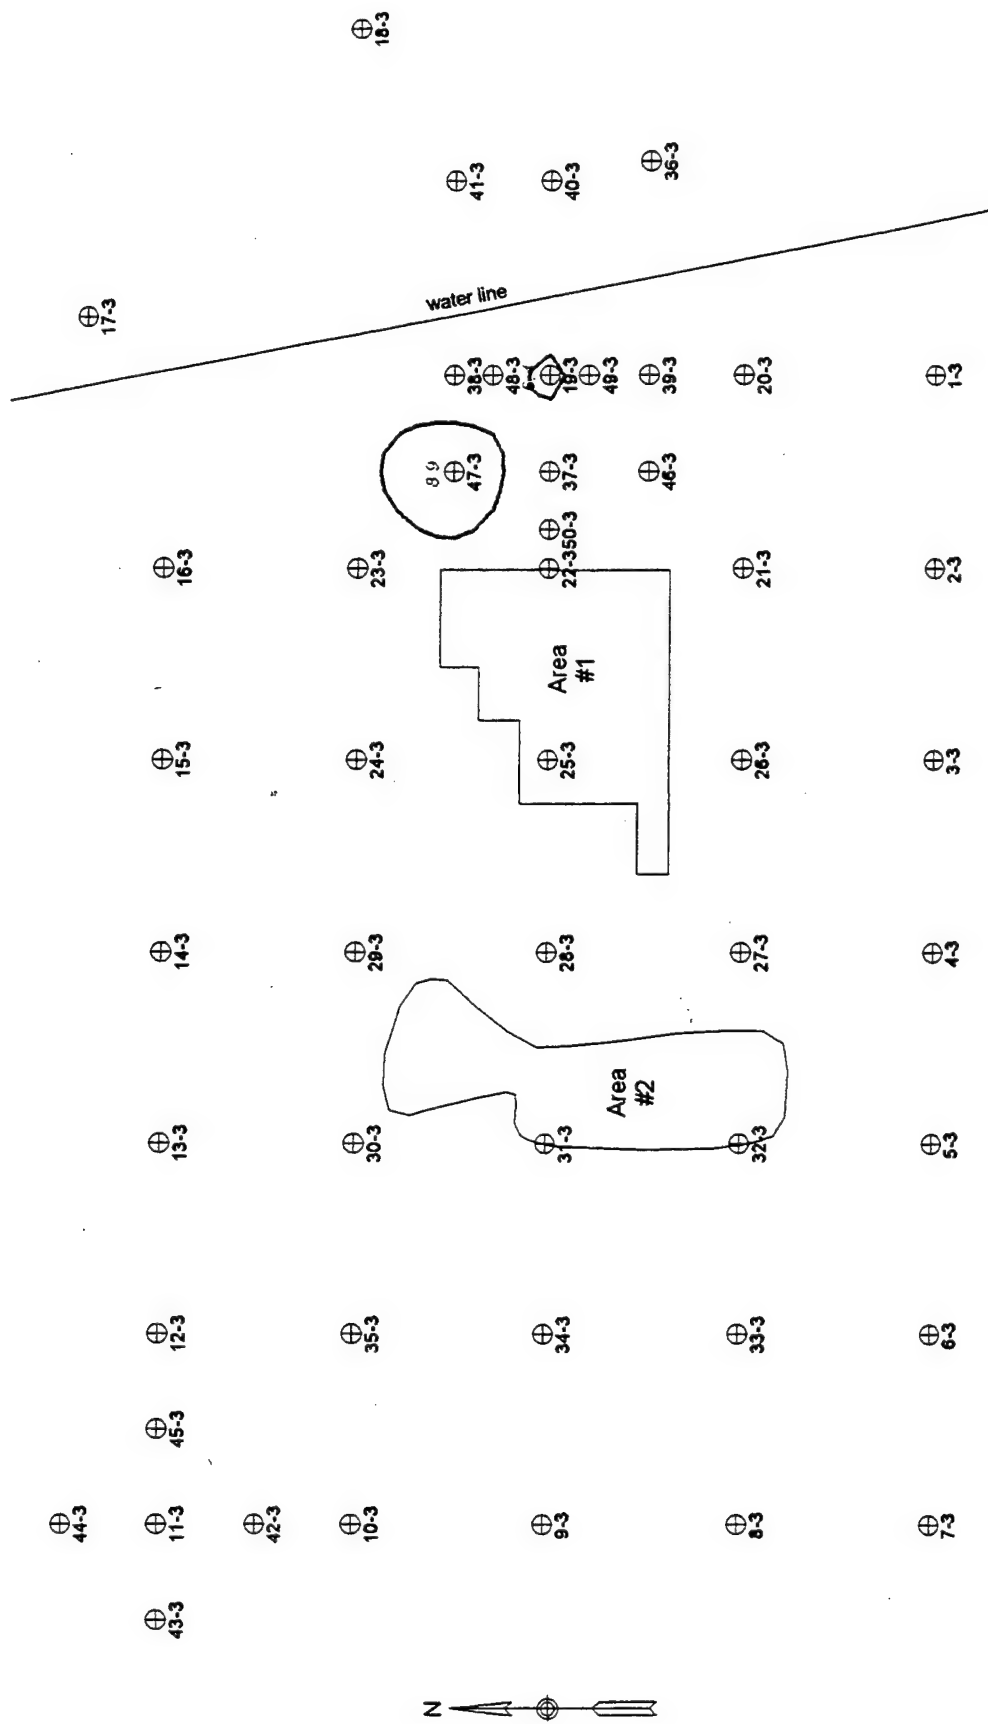


FIGURE 11. Ethylbenzene (ug/l-v)
 AREA 12 SITE SOIL GAS, 6'
 SOUTH DAKOTA AIR NATIONAL GUARD STATION
 SIOUX FALLS, SOUTH DAKOTA

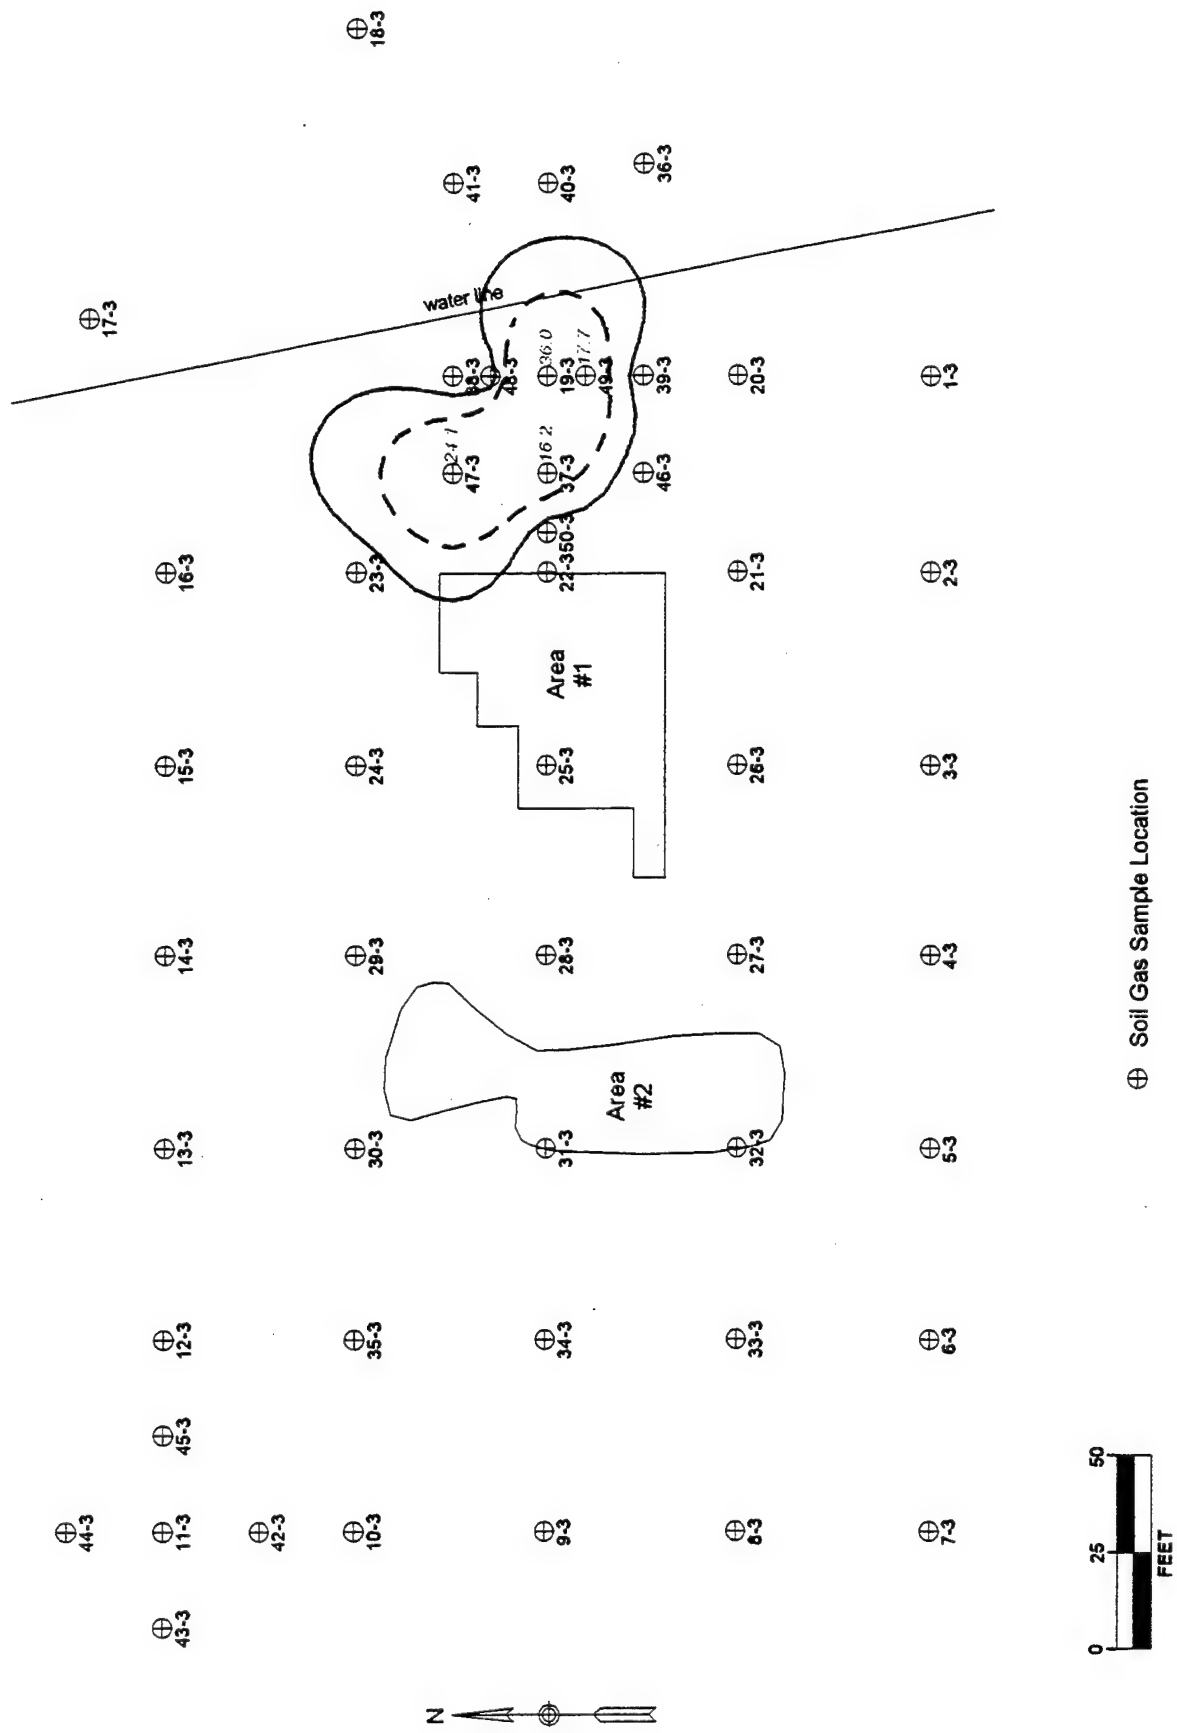


FIGURE 12. Xylenes (ug/l-v)
 AREA 12 SITE SOIL GAS, 6'
 SOUTH DAKOTA AIR NATIONAL GUARD STATION
 SIOUX FALLS, SOUTH DAKOTA

CONCENTRATION CONTOUR KEY
 4 ———
 10 - - -



This map is integral to a written report
 and should be viewed in that context.

Area 13 - Waters

FINAL DATA

SAIC Project # 01-0827-04-3423-008 @
South Dakota Air National Guard Station
Sioux Falls, SD

TEG Project #950607MW

TPH (Mod. EPA 8015), BTEX (EPA 8020) & SOLVENT (EPA 3810/8010) ANALYSES OF WATERS

SAMPLE ID	DATE	TPH	TPH	BENZ	TOL	EBENZ	TOTAL	SOLVENT
		Gasoline	Diesel				XYLENES	
		(ug/L)	(ug/L)	(ug/L)	(ug/L)	(ug/L)	(ug/L)	(ug/L)
MBLK 6/14	6/14/95	ND	ND	ND	ND	ND	ND	ND
GW1301	6/14/95	ND	ND	ND	ND	ND	ND	ND
GW1302	6/14/95	ND	ND	ND	ND	ND	ND	ND
GW1303	6/14/95	ND	ND	ND	ND	ND	ND	ND
GW1304	6/14/95	ND	ND	ND	ND	ND	ND	ND
GW1305	6/14/95	ND	ND	4.5	20.8	3.1	17.4	ND
GW1306	6/14/95	ND	ND	ND	ND	ND	ND	ND
GW1307	6/14/95	ND	ND	ND	6.4	ND	7.4	ND
GW1308	6/14/95	ND	ND	ND	4.3	ND	8.1	ND
GW1309	6/14/95	ND	ND	ND	ND	ND	ND	ND
GW1310	6/15/95	ND	ND	ND	ND	ND	ND	ND
GW1311	6/14/95	ND	ND	ND	ND	ND	ND	ND
GW1312	6/14/95	ND	ND	ND	ND	ND	ND	ND
GW1313	6/14/95	ND	ND	ND	ND	ND	ND	ND
GW1314	6/14/95	ND	ND	ND	ND	ND	ND	ND
GW1315	6/15/95	ND	ND	ND	ND	ND	ND	ND
GW1316	6/15/95	ND	ND	ND	ND	ND	ND	ND
GW1317	6/15/95	ND	ND	ND	ND	ND	ND	ND
GW1318	6/15/95	ND	ND	ND	ND	ND	ND	ND
GW1319	6/15/95	ND	ND	ND	ND	ND	ND	ND
GW1319 DUP	6/15/95	ND	ND	ND	ND	ND	ND	ND
GW1320	6/15/95	ND	ND	ND	ND	ND	ND	ND
600 BLK (EOD)	6/15/95	ND	ND	ND	ND	ND	ND	ND
DETECTION LIMITS		500	500	1.0	1.0	1.0	1.0	1.0
ND INDICATES NOT DETECTED AT LISTED DETECTION LIMITS								

FINAL QC DATA

SAIC Project # 01-0827-04-3423-008 @
South Dakota Air National Guard Station
Sioux Falls, SD

TEG Project #950607MW

QC DATA - MATRIX SPIKE ANALYSIS - WATERS (ug/L)

	DATE	TPH	TPH	BENZ	TOL	EBENZ	TOTAL
		Gasoline	Diesel				XYLENES
		(ug/L)	(ug/L)	(ug/L)	(ug/L)	(ug/L)	(ug/L)
Spiked Conc.	6/18/95	1500	3000	10.0	10.0	10.0	30.0
Measured Conc.		1273	2946	9.3	9.8	9.2	30.4
% Recovery		84.9%	98.2%	93.0%	98.0%	92.0%	101.4%
Spiked Conc.	6/18/95	1500	3000	10.0	10.0	10.0	30.0
Measured Conc.		1225	2748	8.3	9.8	9.7	28.2
% Recovery		81.7%	91.6%	83.0%	98.0%	97.0%	94.2%
RPD		3.8%	7.0%	11.4%	0.0%	5.3%	7.4%

ACCEPTABLE RECOVERY LIMITS: 65% TO 135%

Area 13 - Waters
FINAL QC DATA
 SAIC Project # 01-0827-04-3423-008 @
 South Dakota Air National Guard Station
 Sioux Falls, SD

TEG Project #950607MW

QC DATA - MATRIX SPIKE ANALYSIS - WATERS (ug/L)

Solvent Analyte	Spiked Conc.	MS		MSD		RPD (%)
		Measured Conc.	% Recovery	Measured Conc.	% Recovery	
1,1-Dichloroethene	10.0	9.8	98.0%	12.5	125.0%	24.2%
Methylene Chloride	10.0	7.6	76.0%	7.3	73.0%	4.0%
trans-1,2-Dichloroethene	10.0	8.8	88.0%	8.6	86.0%	2.3%
1,1-Dichloroethane	10.0	8.3	83.0%	7.7	77.0%	7.5%
cis-1,2-Dichloroethene	10.0	8.8	88.0%	7.9	79.0%	10.8%
Chloroform	10.0	8.3	83.0%	8.0	80.0%	3.7%
1,1,1-Trichloroethane	10.0	7.6	76.0%	6.6	66.0%	14.1%
Carbon Tetrachloride	10.0	7.4	74.0%	7.3	73.0%	1.4%
1,2-Dichloroethane	10.0	9.3	93.0%	8.2	82.0%	12.6%
Trichloroethene	10.0	9.4	94.0%	9.7	97.0%	3.1%
1,1,2-Trichloroethane	10.0	8.0	80.0%	4.6	46.0%	54.0%
Tetrachloroethene	10.0	10.1	101.0%	10.3	103.0%	2.0%
Chlorobenzene	10.0	9.2	92.0%	9.5	95.0%	3.2%
1,1,1,2-Tetrachloroethane	10.0	10.0	100.0%	9.8	98.0%	2.0%
1,1,2,2-Tetrachloroethane	10.0	NA	NC	NA	NC	N/A

NA = Not Analyzed
 NC = Not Calculated
 N/A = Not Applicable

ANALYSES PERFORMED IN TEG-MIDWEST'S MOBILE LABORATORY

ANALYSES PERFORMED BY: MR. JEFFREY E. FILKINS

DATA REVIEWED BY: MR. JEFFREY E. FILKINS 7/10/95

Area 13 - Soils

FINAL DATA

SAIC Project # 01-0827-04-3423-008 @
South Dakota Air National Guard Station
Sioux Falls, SD

TEG Project #950607MW

TPH (Mod. EPA 8015), BTEX (EPA 8020) & SOLVENT (EPA 8010) ANALYSES OF SOILS

SAMPLE ID	DATE	TPH	TPH	BENZ	TOL	EBENZ	TOTAL	SOLVENT
		Gasoline (mg/Kg)	Diesel (mg/Kg)				XYLENES (mg/Kg)	
MBLK 6/16	6/17/95	ND	ND	ND	ND	ND	ND	ND
GS13-1-1	6/17/95	ND	ND	ND	ND	ND	ND	ND
GS13-1-2	6/17/95	ND	ND	ND	ND	ND	ND	ND
GS13-1-3	6/17/95	ND	ND	ND	ND	ND	ND	ND
GS13-1-4	6/17/95	ND	ND	ND	ND	ND	ND	ND
GS13-2-1	6/17/95	ND	ND	ND	ND	ND	ND	ND
GS13-2-2	6/17/95	ND	ND	ND	ND	ND	ND	ND
GS13-2-3	6/18/95	ND	ND	ND	ND	ND	ND	ND
GS13-2-4	6/18/95	ND	ND	ND	ND	ND	ND	ND
GS13-3-1	6/18/95	ND	ND	ND	ND	ND	ND	ND
GS13-3-2	6/18/95	ND	ND	ND	ND	ND	ND	ND
GS13-3-3	6/18/95	ND	ND	ND	ND	ND	ND	ND
GS13-3-4	6/18/95	ND	ND	ND	ND	ND	ND	ND
GS13-4-1	6/18/95	ND	ND	ND	ND	ND	ND	ND
GS13-4-2	6/18/95	ND	ND	ND	ND	ND	ND	ND
GS13-4-3	6/18/95	ND	ND	ND	ND	ND	ND	ND
GS13-4-4	6/18/95	ND	ND	ND	ND	ND	ND	ND
DETECTION LIMITS		5.0	5.0	0.10	0.10	0.10	0.10	0.10

ND INDICATES NOT DETECTED AT LISTED DETECTION LIMITS

FINAL DATA

SAIC Project # 01-0827-04-3423-008 @
South Dakota Air National Guard Station
Sioux Falls, SD

TEG Project #950607MW

QC DATA - MATRIX SPIKE ANALYSIS - SOILS (ug/Kg)

	DATE	TPH	TPH	BENZ	TOL	EBENZ	TOTAL
		Gasoline (ug/Kg)	Diesel (ug/Kg)				XYLENES (ug/Kg)
Spiked Conc.	6/18/95	200	500	1.00	1.00	1.00	3.00
Measured Conc.		212	539	0.69	0.74	0.62	2.28
% Recovery		106.0%	107.8%	69.2%	73.8%	62.0%	76.0%
Spiked Conc.	6/18/95	200	500	1.00	1.00	1.00	3.00
Measured Conc.		223	544	0.69	0.71	0.64	2.12
% Recovery		111.5%	108.8%	68.9%	71.0%	63.7%	70.7%
RPD		5.1%	0.9%	0.5%	3.8%	2.8%	7.2%

ACCEPTABLE RECOVERY LIMITS: 65% TO 135%

APPENDIX B. GEOPROBE LOGS

THIS PAGE WAS INTENTIONALLY LEFT BLANK



Field Boring Log

Page 1 of 1

Site File No.	County <u>Minnehaha</u>	Boring No. <u>G501</u>	Monitor Well No. <u>N/A</u>						
Site File Name <u>SDANG Joe Foss Field</u>	Surface Elev.	Completion Depth <u>N/A</u>							
Fed ID No.	Auger Depth	Rotary Depth							
State Planar Coordinates: N. E.	Date: Start <u>6/12/95</u> Time <u>1115</u>	Finish <u>6/13/95</u> Time <u>1230</u>							
Borehole status (BSTAT)*:	Ground water Depth:	Method (See back):							
Drilling Equipment: <u>GEOPROBE</u>	Surface (Circle one): <u>Bare CONCRETE</u>	Grassy	Wooded						
Refer to back of page	SAMPLES								
	Personnel								
USCS	DESCRIPTION*	Depth in feet	MOIST*	Sample No.	Sample Recovery	Lab Anal Y/N	N Valves (Blows)	F.I.D. or P.I.D./LEL Readings	G - M. CRAMER D - D. STARLING H - H -
									REMARKS
		2							
SP	SAND, SOME SILT, LIGHT BROWN, SOFT DRY 7.5YR6 1/3 Lt. Brown	4	DRY	G501-1	1.5/2			0ppm	
	SAND, FINE TO COARSE GRAINED, LOOSE, TRACE GRAVEL, DRY	6	DRY	G502	1.8/2			0ppm	
SP	SAME AS ABOVE, BUT WET.	8	WET	G501-3	1.8/2			0ppm	



Field Boring Log

Page 1 of 1

Site File No.		County <u>Minnehaha</u>		Boring No. <u>G502</u>		Monitor Well No. <u>NA</u>			
Site File Name <u>SDANG Joe Foss Field</u>				Surface Elev.		Completion Depth			
Fed ID No.				Auger Depth		Rotary Depth			
State Planar Coordinates: N. E.				Date: Start <u>6/13/95</u> Time <u>1425</u> Finish <u>6/13/95</u> Time <u>1500</u>					
Borehole status (BSTAT)*:				Ground water Depth:		Method (See back):			
Drilling Equipment: <u>GEOPROBE</u>				Surface (Circle one): <u>Bare Concrete</u>		Grassy Wooded			
				SAMPLES				Personnel	
								G-M. CRAMER D-D. STARLING H- H-	
USCS	DESCRIPTION*	Depth in feet	MOIST*	Sample No.	Sample Recovery	Lab Anal Y/N	N Valves (Blows)	F.I.D. or P.I.D./LEL Readings	REMARKS
	CONCRETE	2							
SC	2-2.8' CLAY AND SAND, BROWN, SOFT, FINE TO MEDIUM GRAINED SAND, DRY 7.5YR4/3 Brown	2.8		G502-1	1.25/2		NA	Oppm	
SP	2.8-4.0 SAND, FINE TO MEDIUM GRAINED, VERY LOOSE, BROWN MOTTLED WITH BLACK, DRY 7.5YR4/3 with 7.5YR2.5/1	4.0							
SP	SAND, FINE TO COARSE GRAINED, BROWN, TRACE GRAVEL, VERY LOOSE, DAMP 7.5YR4/3	6.0		G502-2	1.4/2		NA	Oppm	
SP GP	6.0-6.2 SAME AS ABOVE. 6.2-6.25 GRAVEL, UP TO 25 mm 6.25-8.0 SAME AS 4' TO 6' WITH LITTLE GRAVEL AND WET.	8.0		G502-3	1.8/2		NA	Oppm	
	END OF BORING								



Field Boring Log

Page 1 of 1

Site File No.	County <u>Minnchaha</u>	Boring No. <u>G503</u>	Monitor Well No. <u>NA</u>						
Site File Name <u>SDANG Joe Foss Field</u>	Surface Elev.	Completion Depth							
Fed ID No.	Auger Depth	Rotary Depth							
State Planar Coordinates: N. E.		Date: Start <u>6/13/95</u> Time <u>1520</u> Finish <u>6/13/95</u> Time <u>1600</u>							
Borehole status (BSTAT)*:		Ground water Depth: Method (See back):							
Drilling Equipment: <u>GEOPROBE</u>		Surface (Circle one): <u>Bare concrete</u> Grassy Wooded							
Refer to back of page		SAMPLES						Personnel	
		MOIST*	Sample No.	Sample Recovery	Lab Anal Y/N	N Valves (Blows)	F.I.D. or P.I.D./LEL Readings	G-M. CRAMER D-D. STARLING H- H-	
USCS	DESCRIPTION*	Depth in feet						REMARKS	
	CONCRETE	20							
SC	2.0-2.2- SAND AND CLAY, BROWN, LOOSE, DRY 7.5VR ¹ / ₃	20							
SP	2.2-4.0 - SAND, FINE TO MEDIUM GRAINED, BROWN 7.5VR ¹ / ₃ LITTLE GRAVEL, LOOSE, DRY.	40	DY	G503-1	1.6 2	NA	Oppm		
SP	SAND, FINE TO MEDIUM GRAINED, BROWN TO GREYISH BROWN, LITTLE GRAVEL, LOOSE, SLIGHTLY DAMP. 10VR ⁵ / ₃ to 10VR ⁵ / ₂	60	Slightly Damp	G503-2	1.8 2	NA	Oppm		
SP	SAME AS ABOVE, ONLY BROWN AND WET 10VR ⁵ / ₃	80	WET	G503-3	1.5 2	NA	Oppm		



Field Boring Log

Page 1 of 1

Site File No.	County <u>Minnchaha</u>	Boring No. <u>G504</u>	Monitor Well No. <u>NA</u>
Site File Name	<u>SDANG Joe Foss Field</u>	Surface Elev.	Completion Depth
Fed ID No.		Auger Depth	Rotary Depth
State Planar Coordinates: N. E.		Date: Start <u>6/13/95</u> Time <u>1717</u> Finish <u>6/13/95</u> Time <u>1750</u>	
Borehole status (BSTAT)*:		Ground water Depth:	Method (See back):
Drilling Equipment: <u>GEOPROBE</u>		Surface (Circle one): <u>Bare Concrete</u>	Grassy Wooded

* Refer to back of page

USCS	DESCRIPTION*	Depth in feet	SAMPLES						Personnel
			MOIST*	Sample No.	Sample Recovery	Lab Anal Y/N	N Valves (Blows)	F.I.D. or P.I.D./ LEL Readings	G- M. CRAMER D- D. STARLING H- H-
	CONCRETE	2.0							
SC	2.0-2.6 CLAY & SAND, FINE GRAINED SAND, DARK BROWN TRACE GRAVEL, LOOSE, DRY. 10YR 7.5	2.0	DRY	G504-1	1.8 2.0		NA	Oppm	
SP	2.6-4.0 SAND, FINE TO MEDIUM GRAINED, LIGHT BROWN TO DARK BROWN, LOOSE, DRY. 10YR 6.5 to 10YR 7.5	4.0	DRY	G504-2	1.8 2.0		NA	Oppm	
GP	4.0-4.05 GRAVEL	6.0							
SP	4.1-6.0 SAND, FINE TO MEDIUM GRAINED, BROWN, LOOSE, DRY 10YR 5.5	6.0	DRY	G504-3	1.4 2.0		NA	Oppm	
SP	SAME AS ABOVE WITH SOME FINE TO COARSE GRAVEL, AND WET.	8.0	WET						
	END OF BORING.								



Field Boring Log

Page 1 of 1

Site File No.		County <u>Minnehaha</u>		Boring No. <u>GS05</u>		Monitor Well No. <u>NA</u>			
Site File Name <u>SDANG Joe Foss Field</u>				Surface Elev.		Completion Depth			
Fed ID No.				Auger Depth		Rotary Depth			
State Planar Coordinates: N. E.				Date: Start <u>6/13/95</u> Time <u>1814</u> Finish <u>6/13/95</u> Time <u>1850</u>					
Borehole status (BSTAT)*:				Ground water Depth:		Method (See back):			
Drilling Equipment:				Surface (Circle one): <u>Bare Concrete</u>		Grassy Wooded			
Refer to back of page				SAMPLES				Personnel	
								G - M. CRAMER D - D. STARLING H - H -	
USCS	DESCRIPTION*	Depth in feet	MOIST*	Sample No.	Sample Recovery	Lab Anal Y/N	N Valves (Blows)	F.I.D. or P.T.D./LEL Readings	REMARKS
	Top 3" Concrete, Rest of Interval NOT TAKEN.	2							
SC	CLAY SOME SAND, DARK BROWN, MODERATELY PLASTIC, 10YR ^{3/3} MEDIUM STIFF, FINE GRAINED SAND, DRY		Dry						
			to						
SP	3.1' - SAND, FINE TO MEDIUM GRAINED, TRACE FINE GRAVEL, BROWN, TO LIGHT BROWN, LOOSE, DAMP 10YR ^{5/3} to 10YR ^{4/3}	4.0	Damp	GS05-1	1.6/2			2ppm	
SP	SAME AS ABOVE, ONLY SLIGHTLY MORE DAMP	6.0	Damp	GS05-2	1.8/2			7ppm	
SP	SAME AS ABOVE, WITH 6.3' to 6.4' BLACK 10YR ^{2/1} 6.4' - SAME AS ABOVE WITH MEDIUM TO COARSE GRAINED SAND, WET	8.0	WET	GS05-3	1.9/2			3ppm	



Field Boring Log

Page 1 of 1

Site File No.		County <u>Minnehaha</u>		Boring No. <u>GS13-1</u>		Monitor Well No. <u>NA</u>		
Site File Name <u>SDANG Joe Foss Field</u>				Surface Elev.		Completion Depth <u>9' bgs</u>		
Fed ID No.				Auger Depth <u>NA</u>		Rotary Depth <u>NA</u>		
State Planar Coordinates: N. E.				Date: Start <u>6/5/95</u> Time <u>1330</u> Finish <u>6/5/95</u> Time <u>1420</u>				
Borehole status (BSTAT)*:				Ground water Depth:		Method (See back):		
Drilling Equipment: <u>Geoprobe</u>				Surface (Circle one): <u>Bare Asphalt</u> Grassy Wooded				
				Personnel				
				G - M. Cramer D - D. Starling H - H -				
				REMARKS				
USCS	DESCRIPTION*	Depth in feet	MOIST*	Sample No.	Sample Recovery	Lab Anal Y/N	N Valves (Blows)	F.I.D. or P.I.D./LEL Readings
	ASPHALT - INTERVAL NOT TAKEN							
GP	Sand and Gravel, Brown to Rusty Brown, Fine to Course Sand, Loose, Slightly, Damp 10YR 5/3 to 5YR 4/3	1		GS13-1-1	70%			Øppm
CL	Gravel layer, Clay, Black, Plastic, Trace Silt, Dry, Medium Stiff 10YR 2/1	2						
CL	SAME AS ABOVE	3		GS13-1-2	100%			Øppm
CL	Clay, Some Sand, Trace Gravel, Light Olive Brown mottled with beige, Moderate Plastic, Soft, Trace Iron Staining, Dry to Slightly Damp 2.5Y 5/4	5		GS13-1-3	90%			Øppm
CL	SAME AS ABOVE	7		GS13-1-4	100%			Øppm
SC	Sand and Clay, Fine to Med., Moderate Plastic, Soft, Wet	7.75						
		9						
								Bottom of Boring 9' bgs



Field Boring Log

Page 1 of 1

Site File No.	County <u>Minnichaha</u>	Boring No. <u>GS13-2</u>	Monitor Well No. <u>NA</u>
Site File Name <u>SDANG Joe Foss Field</u>	Surface Elev.		Completion Depth
Fed ID No.	Auger Depth <u>NA</u>		Rotary Depth <u>NA</u>
State Planar Coordinates: N. E.	Date: Start <u>6/5/95</u> Time <u>1450</u> Finish <u>6/5/95</u> Time <u>1600</u>		

Borehole status (BSTAT)*:	Ground water Depth:	Method (See back):
Drilling Equipment: <u>Geoprobe</u>	Surface (Circle one): <u>Bare Asphalt</u>	Grassy Wooded

SAMPLES							Personnel
MOIST*	Sample No.	Sample Recovery	Lab Anal Y/N	N Valves (Blows)	F.I.D. or P.T.D./LEL Readings	REMARKS	
						G - M. Cramer D - D. Starling H - H -	

Refer to back of page

USCS	DESCRIPTION*	Depth in feet	MOIST*	Sample No.	Sample Recovery	Lab Anal Y/N	N Valves (Blows)	F.I.D. or P.T.D./LEL Readings	REMARKS
	Asphalt	1							
GP	1.0-1.25' Sand and Gravel, Brown to Rusty Brown, Fine to Course, Sand Damp	1		GS13-2-1	40%			0 ppm	
CL	1.25-1.75' Black Clay, Trace Silt, Plastic, Dry, Med. Stiff 7.5YR 2.5/1	3							
CL	SAME AS ABOVE	5			95%			NR	
CL	5.0-5.5' SAME AS ABOVE	5							
CL	5.5-6.7' Clay, trace, gravel, some sand, moderate plastic, soft, Dry to slightly damp	7			90%			NR	
SC	Clay & Sand, some silt, Med. Plastic, soft	7			70%			NR	
SP	8.8-9.0' Sand Fine to Med, Loose, Wet	9							



Field Boring Log

Page 1 of 1

Site File No.		County <u>Minnehaha</u>		Boring No. <u>GS13-3</u>		Monitor Well No. <u>NA</u>				
Site File Name <u>SDANG Joe Foss Field</u>				Surface Elev.		Completion Depth <u>9' bgs</u>				
Fed ID No.				Auger Depth <u>NA</u>		Rotary Depth <u>NA</u>				
State Planar Coordinates: N. E.				Date: Start <u>6/5/95</u> Time <u>1622</u> Finish <u>6/5/95</u> Time <u>1736</u>						
Borehole status (BSTAT)*:				Ground water Depth:		Method (See back):				
Drilling Equipment: <u>Geoprobe</u>				Surface (Circle one):		<u>Bare Asphalt</u> Grassy Wooded				
				SAMPLES		Personnel				
				MOIST*	Sample No.	Sample Recovery	Lab Anal Y/N	N Valves (Blows)	F.I.D. or P.I.D./LEL Readings	G- <u>M. Cramer</u> D- <u>D. Starling</u> H- H-
										REMARKS
USCS	DESCRIPTION*	Depth in feet								
	<u>Asphalt</u>									
<u>GP</u>	<u>1.0-1.8' Sand and Gravel, Lt. Brown, Fine to Course Sand, Loose, Dry 7.5YR 6/3</u>	<u>1</u>		<u>GS13-3-1</u>	<u>55%</u>				<u>10ppm</u>	
<u>SC</u>	<u>1.8-3.0' Sand and Clay, some Silt, Gray, Plastic, Med. Stiff, Dry 7.5YR 5/1</u>	<u>3</u>		<u>GS13-3-2</u>	<u>95%</u>				<u>0ppm</u>	
<u>CL</u>	<u>Clay, Some Silt, Black, Med. Stiff, Dry 7.5YR 2.5/1</u>	<u>5</u>		<u>GS13-3-3</u>	<u>45%</u>				<u>0ppm</u>	
<u>GP</u>	<u>SAME AS ABOVE, except Medium Brown 5.5-6.2 Sand and Gravel, Loose, Damp</u>	<u>7</u>		<u>GS13-3-4</u>	<u>100%</u>				<u>0ppm</u>	
<u>CL</u>	<u>Clay, Some Silt, Trace Fine Sand, Med. Brown to Black, Med. Plastic, Soft, Damp to Wet</u>	<u>9</u>								
<u>Bottom of Boring</u>										



Field Boring Log

Page 1 of 1

Site File No.	County <u>Minnehaha</u>	Boring No. <u>GS13-4</u>	Monitor Well No. <u>NA</u>		
Site File Name <u>SDANG Joe Foss Field</u>	Surface Elev.	Completion Depth			
Fed ID No.	Auger Depth <u>NA</u>	Rotary Depth <u>NA</u>			
State Planar Coordinates: N. E.	Date: Start <u>6/15/95</u> Time <u>1750</u> Finish <u>6/15/95</u> Time <u>1830</u>				
Borehole status (BSTAT)*:	Ground water Depth:	Method (See back):			
Drilling Equipment: <u>Geoprobe</u>	Surface (Circle one): <u>Bare Asphalt</u>	Grassy Wooded			
Refer to back of page	SAMPLES				
	Personnel				
USCS	DESCRIPTION*	Depth in feet	MOIST* Sample No. Sample Recovery Lab Anal Y/N N Valves (Blows) F.I.D. or P.I.D./ LEL Readings	G- <u>M. Cramer</u> D- <u>D. Starling</u> H- H-	
	<u>Asphalt</u>				
GP	1.0-1.25' Sand and Gravel, Brown to Rusty Brown, Fine to Course Sand, Loose, Dry, 10YR5/3 to 5YR4/3	1	GS13-4-1	40%	1 ppm
CL	1.25-1.75' Clay, Black, Plastic, Trace Silt, Dry, Medium Stiff 10YR2/1	3	GS13-4-2	100%	0 ppm
CL	SAME AS ABOVE	5	GS13-4-3	100%	.5 ppm
CL	SAME AS ABOVE EXCEPT SOME SILT AND COLOR Change to Lt. Olive Brown 2.5Y5/4	7	GS13-4-4	100%	1 ppm
SC	7.0-8.4' Clay and Sand, Some Silt, Med. Plastic, Soft, Light Olive Brown 2.5Y5/4	9			
SP	8.4-9.0' Sand, Fine to Med., Loose, Wet				
					Bottom of Boring

APPENDIX C. PIEZOMETER LOGS AND CONSTRUCTION DIAGRAMS

THIS PAGE WAS INTENTIONALLY LEFT BLANK



Field Boring Log

Page 1 of 2

Site File No.	County <u>Minnchaha</u>	Boring No. <u>PZ01</u>	Monitor Well No. <u>PZ01</u>
Site File Name <u>SDANG Joe Foss Field</u>	Surface Elev.	Completion Depth <u>15.8' bgs</u>	
Fed ID No.	Auger Depth <u>15' bgs</u>	Rotary Depth <u>NA</u>	
State Planar Coordinates: <u>N.</u>	<u>E.</u>	Date: Start <u>7/11/95</u> Time <u>1530</u> Finish <u>7/11/95</u> Time <u>1735</u>	

Borehole status (BSTAT)*:	Ground water Depth:	Method (See back):
Drilling Equipment:	Surface (Circle one):	Bare Grassy Wooded

Acker Hollow Stem Auger Drill Rig
 4" ID Hollow Stem Augers
 2" OD Split Spoon
 140 lb Hammer

* Refer to back of page

USCS	DESCRIPTION*	Depth in feet	SAMPLES						REMARKS
			MOIST*	Sample No.	Sample Recovery	Lab Anal Y/N	N Valves (Blows)	F.I.D. or P.T.D./ LEL Readings	
PT	0'-0.5' 10YR 2/1 Black Humus, Some Sand, Semi Plastic, Damp	1			25%		3 4 4	ppm	HNu Background Reading
PT	2.0-2.4' Same As Above with more sand	2					4 5 5	ppm	
SP	2.4-3.0' 10YR 3/3 Dark Brown, Sand, med to coarse, non cohesive, damp	3			60%		5 5 6	ppm	
P	3.0-3.2' Same As Above, Sand coarse	4					3 5 6	ppm	
SP	4.0-5.85' Same As Above grading to poorly sorted, well rounded, moist	5			80%		5 6 8	ppm	
		6							Shelby Tube Collected Water level at 6' bgs
		7							
		8							
SP	8.0-8.8' 10YR 3/3 Dark Brown, Sand, poorly sorted, saturated	9			60%		3 4 5	ppm	
SP	8.8-9.3' 10YR 3/3 Dark Brown, Sand, Fine, well sorted	10					4 5 4	ppm	
SP	10.0-11.3' 10YR 3/3 Dark Brown, Sand, med. to coarse grading to fine	11			60%		2 3 3	ppm	
		12					5 3 4	ppm	
SP	12.0-13.4' 10YR 3/3 Dark Brown, Sand, Fine grading to medium grading to poorly sorted coarse sand and gravel conglomerate	13			70%		4 4 5	ppm	
		14					5 4 5	ppm	
	14.0-15.8' SAME AS ABOVE Pebble Conglomerate with some sand	15			85%		5 5 5	ppm	
		16							Bottom of Boring 15.8' bgs



MONITORING WELL CONSTRUCTION LOG - Standard			Rev: 10/94
Site ID: PZ01	Installation: Joe Foss Field	Site: PZ01	
Project No.: 3423	Client / Project: SDANG	Organization (Drilling Contractor): Layne-Western Company, Inc.	
Built by: Tracey Bugg	Driller: Lyle Porter		
Comp. Start: 7/11/95	Comp. End: 7/11/95	Well Coord.:	

PROTECTIVE COVER		Flush Mount
Material Type:	Diameter of Protective Casing [CASES]:	Height:
Mortar Collar Height:	Depth BGS:	Drainage Hole ()
Size:		

GUARD POSTS	
Yes / <input checked="" type="radio"/> No	No.: Configuration: Type:

SURFACE PAD	
Material:	Size:

RISER PIPE	
Type: PVC	Length [CASE]: Diameter [CASED]: 2"

GROUT	
Composition: Portland	
Proportions:	
Interval:	
Method (See back):	
Tremied: YES <input checked="" type="radio"/> NO	Too Shallow

SEAL (BSEAL)	
2' Type: Peltonite	Source:
Setup / Hydration time: 20 minutes	Vol. Fluid Added: 7 gal Tremied: YES <input checked="" type="radio"/> NO

SCREEN (SCREN)	
Type: PVC	
Manufacturer: Campbell Monoflex	
Diameter (ID): 2"	
Slot Size: 010	
Schedule/Thickness: 40	
Method (See back):	

GRAVEL FILTER (GFILT)	
FILTER PACK	
Type: Morie GA9	
Amount Used: 2 bags	
Gr. Size Dist.: 010	
Source:	
Tremied: YES <input checked="" type="radio"/> NO	

BACKFILL PLUG (BFILL)	
Material: Sand	
Setup / Hydration time: NA	
Method (See back):	Tremied: YES <input checked="" type="radio"/> NO

CENTRALIZERS ()	
Type:	
Depth(s):	

TOTAL DEPTH (DPTOT)	
15 Ft.	

Borehole Dia.	
38'	

DEPTH (FEET)

CASES

STKUP

Flush

GS Elevation:

GS Height:

Depth BGS:

CASE No.

CASED No.

5 FL

14.25 Ft.

FL

15 FL

38'



Field Boring Log

Page 1 of 2

Site File No.	County <u>Minnehaha</u>	Boring No. <u>PZ02</u>	Monitor Well No. <u>PZ02</u>
Site File Name <u>SDANG Joe Foss Field</u>	Surface Elev.	Completion Depth <u>16' bgs</u>	
Fed ID No.	Auger Depth <u>16' bgs</u>	Rotary Depth <u>NA</u>	
State Planar Coordinates: <u>N.</u> <u>E.</u>	Date: Start <u>7/12/95</u> Time <u>0815</u>	Finish <u>7/12/95</u> Time <u>1030</u>	

Borehole status (BSTAT)*:	Ground water Depth:	Method (See back):
Drilling Equipment:	Surface (Circle one):	Bare Grassy Wooded

Acker Hollow Stem Auger Drill Rig
 4" ID Hollow Stem Augers
 2" OD Split Spoon
 140 lb Hammer

* Refer to back of page

USCS	DESCRIPTION*	Depth in feet	MOIST*	Sample No.	Sample Recovery	Lab Anal Y/N	N Valves (Blows)	F.I.D. or P.T.D./LEL Readings	Personnel	REMARKS
PT	0-0.25' 10YR 3/3 to 3/1 Dark Brown to Black, Humus, low to no plasticity, Dry	1			10%		5	0 ppm	G - Tracey Bugg D - Lyle Porter H - Mark Lesly H -	Background HME Reading 0 ppm
		2								No Split Spoon Collected
		3								
		4								
		5			0					Split Spoon Collected No Recovery
CH	6.0'-6.5' 10YR 3/1 Black, Clay, tight, High Plasticity, Moist	6					4			
SP	6.5'-7.0' 10YR 5/1 Gray, Sand, med., with silt, rounded, Saturated	7			50%		3	0 ppm		This Spoon is probably not representative of interval due to no recovery at 4'-6' interval Water level at 7' bgs
		8					5			No Split Spoon Collected
		9								
CH	10.0'-10.3' 10YR 2/1 Black, Clay, High Plasticity, Saturated	10					2			
SP	10.3'-10.9' 10YR 4/4 Lt. Yellowish Brown, Sand, Med.	11			80%		3	0 ppm		
SP	10.9'-11.8' 10YR 5/1 Gray, Sand	12					4			No Split Spoon Collected
		13								
SP	14.0'-15.5' 10YR 5/1 Gray, Sand, Fine grading to medium	14			90%		3	0 ppm		
		15					4			
SP	15.5'-15.9' 2.5Y 4/3 Olive Brown, Sand, med. to coarse, Some Pebbles	16					5			Bottom of Boring 16' bgs
		17								
		18								



MONITORING WELL CONSTRUCTION LOG - Standard			Rev: 10/94
Site ID: P202	Installation: Joe Foss Field	Site: P202	
Project No.: 3423	Client / Project: SDANG	Organization (Drilling Contractor): Layno - Western Company, Inc.	
Built by: Tracy Bugg	Driller: Lyle Porter		
Comp. Start: 7/12/95	Comp. End: 7/12/95	Well Coord.:	

DEPTH (FEET)	PROTECTIVE COVER	Flush Mount	
	Material Type:	Diameter of Protective Casing [CASES]:	Height:
	Mortar Collar Height:	Depth BGS:	Drainage Hole ()
	Size:		
	GUARD POSTS		
	Yes / No	Configuration:	Type:
	SURFACE PAD		
	Material:	Size:	
	RISER PIPE		
	Type: PVC	Length [CASE]:	Diameter [CASED]:
	GROUT		
	Composition: Portland		
	Proportions:		
	Interval:		
	Method (See back):		
	Tremmed: YES NO Too Shallow		
	SEAL (BSEAL)		
	Type: Peltonite	Source:	
	Setup / Hydration time: 10 minutes	Vol. Fluid Added: 4 gal Tremmed: YES NO	
	GRAVEL FILTER (GFILT)		
	FILTER PACK		
	Type: Morie GA9		
	Amount Used: 3 1/2 bags		
	Gr. Size Dist.: for 010		
	Source		
	Tremmed: YES NO		
	SCREEN (SCREN)		
	Type: PVC		
	Manufacturer: Campbell Monoflex		
	Diameter (ID): 2"		
	Slot Size: 010		
	Schedule/Thickness: 40		
	Method (See back):		
	BACKFILL PLUG (BFILL)		
	Material: Sand		
	Setup / Hydration time: NA		
	Method (See back):	Tremmed: YES NO	
	CENTRALIZERS ()		
	Type:		
	Depth(s):		
	TOTAL DEPTH (DPTOT)		
	16 FL		
	.38'		
	Borehole Dia.		



Field Boring Log

Page 1 of 2

Site File No.	County <u>Minnehaha</u>	Boring No. <u>PZ Ø3</u>	Monitor Well No. <u>PZ Ø3</u>
Site File Name <u>SDANG Joe Foss Field</u>	Surface Elev.	Completion Depth	
Fed ID No.	Auger Depth	Rotary Depth <u>NA</u>	
State Planar Coordinates: <u>N.</u> <u>E.</u>	Date: Start <u>7/2/95</u> Time <u>1230</u>	Finish <u>7/12/95</u> Time <u>1410</u>	
Borehole status (BSTAT)*:	Ground water Depth:	Method (See back):	
Drilling Equipment: <u>Acker Hollow Stem Auger Drill Rig</u> <u>4" ID Hollow Stem Augers</u> <u>2" OD Split Spoon</u> <u>140 lb Hammer</u>	Surface (Circle one): <u>Bare</u> <u>Grassy</u> <u>Wooded</u>		
	SAMPLES		Personnel
	MOIST*	Sample No.	Sample Recovery
		Lab Anal Y/N	N Valves (Blows)
		F.T.D. or P.T.D./	LEL Readings
			G - Tracey Bugg D - Lyle Porter H - Mark Lesly H -

* Refer to back of page

USCS	DESCRIPTION*	Depth in feet	MOIST*	Sample No.	Sample Recovery	Lab Anal Y/N	N Valves (Blows)	F.T.D. or P.T.D./ LEL Readings	REMARKS
	Core Not Logged 0-4'	1 2 3 4							Background H _{Nu} Reading <u>Oppm</u> No Split Spoons Collected
CL	4.0'-4.3' 10YR 7/1 Black, Clay with Silt, Low Plasticity, Moist	5			100%		5 13 14 16	Øppm	
SP	4.3'-5.6' 10YR 4/2 Dark Grayish Brown, Sand, med.	6					5 5 8 13	Øppm	Water Level at 7.8' bgs.
SP	5.6'-6.0' Sand, Fine to Med, Dry	7			40%				No Split Spoon Collected
SP	6.0'-6.8' 10YR 3/2 V. DK. Brown, Sand, Med-Course, grading to very course, saturated	8 9 10							
SP	10.0'-10.75' SAME AS ABOVE	11			80%		4 5 6 7	Øppm	No Split Spoon Collected
SP	10.75'-11.75' 10YR 3/3 Dark Brown, Sand, Med. Poorly Sorted, with pebble conglomerates	12 13 14							
SP	14.0'-14.25' Sand, Fine to Med.	15			50%		6 6 7 8	Øppm	
SP	14.25'-14.7' Sand, Course with pebbles conglomerates	16							
CL	14.7'-15.1' 10YR 4/2 Dark Grayish Brown, Silt with Clay and Sand, Semi-plastic								



MONITORING WELL CONSTRUCTION LOG - Standard			Rev: 10/94
Site ID: P203	Installation: Joe Foss Field	Site: P203	
Project No.: 3423	Client / Project: SDANG	Organization (Drilling Contractor): Layno - Western Company	
Built by: Tracey Bugg	Driller: Lyle Porter		
Comp. Start: 7/12/95	Comp. End: 7/12/95	Well Coord.:	

DEPTH (FEET)	PROTECTIVE COVER	Flush Mount	
	Material Type:	Diameter of Protective Casing [CASES]:	Height:
	Mortar Collar Height:	Depth BGS:	Drainage Hole ()
	Size:		
	GUARD POSTS		
	Yes / No:	Configuration:	Type:
	SURFACE PAD		
	Material:	Size:	
	RISER PIPE		
	Type: PVC	Length [CASE]:	Diameter [CASED]:
GROUT			
Composition: Portland			
Proportions:			
Interval:			
Method (See back):			
Tremied: YES NO Too Shallow			
CASE No.			
CASED No.			
SEAL (BSEAL)			
2' Type: Peltonite			
Source:			
Setup / Hydration time: 10 minutes			
Vol. Fluid Added: 3gal Tremied: YES NO			
GRAVEL FILTER (GFILT)			
FILTER PACK			
Type: Morie GA9			
Amount Used: 5 bags			
Gr. Size Dist.: for 010			
Source			
Tremied: YES NO			
SCREEN (SCREN)			
Type: PVC			
Manufacturer: Campbell Monoflex			
9.25' Diameter (ID): 2"			
Slot Size: 010			
Schedule/Thickness: 40			
Method (See back):			
14.25 Ft.			
FL.			
15 Ft.			
TOTAL DEPTH (DPTOT)			
16 Ft.			
.38' Borehole Dia.			
BACKFILL PLUG (BFILL)			
Material: Sand			
Setup / Hydration time: NA			
Method (See back):			
Tremied: YES NO			
CENTRALIZERS ()			
Type:			
Depth(s):			

APPENDIX D. MONITORING WELL LOGS AND CONSTRUCTION DIAGRAMS

THIS PAGE WAS INTENTIONALLY LEFT BLANK



Field Boring Log

Page 1 of 2

Site File No.		County <u>Minnehaha</u>		Boring No. <u>MW12-01</u>		Monitor Well No. <u>MW12-01</u>	
Site File Name <u>SDANG Joe Foss Field</u>				Surface Elev.		Completion Depth	
Fed ID No.				Auger Depth		Rotary Depth <u>NA</u>	
State Planar Coordinates: N. E.				Date: Start <u>7/14/95</u> Time <u>1425</u> Finish <u>7/14/95</u> Time <u>1850</u>			
Borehole status (BSTAT)*:				Ground water Depth:		Method (See back):	
Drilling Equipment: <u>Acker Hollow Stem Auger Drill Rig</u> <u>8" ID Hollow Stem Augers</u> <u>2" DD Split Spoon 140 lb Hammer</u>				Surface (Circle one): Bare Grassy Wooded			
Refer to back of page				Personnel: G - Tracey Bugg D - Lyle Porter H - Mark Hesly H -			
USCS		DESCRIPTION*		Depth in feet		REMARKS	
		Core Not Logged 0-6' bgs		0'		No Split Spoons Collected	
SP		6.0'-7.7' 2.5Y4/3 Olive Brown, Sand, med., poorly sorted		6'		Water Level at 7.2' bgs	
				7'		No Split Spoon Collected	
				8'			
				9'			
SP		10.0'-11.2' 2.5Y4/3 Olive Brown, Sand, fine to medium		10'			
SP		11.2'-11.7' SAME As Above Except 2.5Y4/2 Dark Grayish Brown		11'			
				12'		No Split Spoon Collected	
				13'			
SW		14.0'-14.75' 2.5Y3/3 Dark Olive Brown, Sand, Fine		14'			
SP		14.75'-15.1' Same As Above Except Coarse Sand		15'			
SW		15.1'-15.4' Same As Above Except Fine Sand		15'			
SP		15.4'-15.65' Coarse with pebbles		16'		Bottom of Boring 16' bgs	
SW		15.65'-15.9' 2.5Y Dark Gray Fine Sand		16'			



MONITORING WELL CONSTRUCTION LOG - Standard			Rev: 10/94
Site ID: MW12-Ø1	Installation: Joe Foss Field	Site: MW12-Ø2	
Project No.: 3423	Client / Project: SDANG	Organization (Drilling Contractor): Layne-Western Company, Inc.	
Built by: Tracey Bugg	Driller: Lyle Porter		
Comp. Start: 7/14/95	Comp. End: 7/14/95	Well Coord.:	

DEPTH (FEET)	Casing Height:	PROTECTIVE COVER	Flush Mount	Diameter of Protective Casing [CASES]:	Height:	
	Height:	Material Type:	Mortar Collar Height:	Depth BGS:	Drainage Hole ()	Size:
	CASES	GUARD POSTS	Yes / <input checked="" type="radio"/> No	No.:	Configuration:	Type:
	STKUP	SURFACE PAD	Material:	Size:		
	Flush	RISER PIPE	Type: PVC	Length [CASE]:	Diameter [CASED]:	
	GS Elevation:	GROUT				
	GS Height:	Composition: Portland				
	Depth BGS:	Proportions:				
		Interval:				
		Method (See back):				
	CASE No.	1'	Tremied: YES <input checked="" type="radio"/> NO Too Shallow			
	CASED No.					
	SEAL (BSEAL)	2'	Type: Peltonite	Source:		
	5 FL		Setup / Hydration time: 25 minutes	Vol. Fluid Added: 3 gal	Tremied: YES <input checked="" type="radio"/> NO	
	SCREEN (SCREN)	9.25'	Type: PVC	Filter Pack		
	4.25 Ft.		Manufacturer: Campbell Monoflex	Type: Morie GA9		
	NA Ft.		Diameter (ID): 4"	Amount Used: 4 1/2 bags		
	15 Ft.		Slot Size: 010	Gr. Size Dist: for 010		
			Schedule/Thickness: 40	Source		
			Method (See back):	Tremied: <input checked="" type="radio"/> YES NO		
	BACKFILL PLUG (BFILL)	.08'	Material:	CENTRALIZERS()		
			Setup / Hydration time:	Type:		
			Method (See back):	Depth(s):		
			Tremied: YES NO			
	TOTAL DEPTH (DPTOT)	.85'				
	116 Ft.					
	Borehole Dia.					



Field Boring Log

Page 1 of 2

Site File No.		County <u>Minnehaha</u>		Boring No. <u>MW12-02</u>		Monitor Well No. <u>MW12-02</u>	
Site File Name <u>SDANG Joe Foss Field</u>				Surface Elev.		Completion Depth <u>16' bgs</u>	
Fed ID No.				Auger Depth <u>16' bgs</u>		Rotary Depth <u>NA</u>	
State Planar Coordinates: <u>N.</u> <u>E.</u>				Date: Start <u>7/5/95</u> Time <u>0725</u> Finish <u>7/5/95</u> Time <u>0900</u>			
Borehole status (BSTAT)*:				Ground water Depth:		Method (See back):	
Drilling Equipment: <u>Acker Hollow Stem Auger Drill Rig</u> <u>8" ID Hollow Stem Augers</u> <u>2" OD Split Spoon 140 lb Hammer</u>				Surface (Circle one): <u>Bare</u> <u>Grassy</u> <u>Wooded</u>			
Refer to back of page							
USCS		DESCRIPTION*		Depth in feet		REMARKS	
		Core Not Logged 0-6' bgs		0'		No Split Spoons Collected Background HNu Reading 0ppm	
SP		6.0'-7.0' 2.5Y4/2 Dark Grayish Brown, Sand, Med., Poorly Sorted		7'		Water Level at 7' bgs.	
				8'		No Split Spoons Collected	
SW		10.0'-11.5' 2.5Y4/3 Olive Brown, Sand, Fine		11'		90% 3 4 5 0ppm	
SP		11.5'-11.8' 10YR5/3 Brown, Sand, Course		12'		No Split Spoon Collected	
				13'			
SP		14.0'-14.8' 2.5Y5/4 light Olive Brown, Sand, Med to Fine		15'		90% 2 3 4 5 0ppm	
SP		14.8'-15.6' 2.5Y5/4 light Olive Brown, Sand, V. Course to granules with pebbles		16'		Bottom of Boring 16' bgs	

Appendix D
Page D-4



Field Boring Log

Page 1 of 2

Site File No.	County <u>Minnehaha</u>	Boring No. <u>MW12-03</u>	Monitor Well No. <u>MW12-03</u>																																																																																																																																																				
Site File Name <u>SDANG Joe Foss Field</u>	Surface Elev.	Completion Depth																																																																																																																																																					
Fed ID No.	Auger Depth <u>16' bgs</u>	Rotary Depth <u>NA</u>																																																																																																																																																					
State Planar Coordinates: N. E.	Date: Start <u>7/15/95</u> Time <u>1944</u> Finish <u>7/16/95</u> Time <u>1010</u>																																																																																																																																																						
Borehole status (BSTAT)*:	Ground water Depth: <u>NR</u> Method (See back):																																																																																																																																																						
Drilling Equipment: <u>Acker Drill Rig</u> <u>Hollow Stem Auger</u> <u>8" ID Hollow Stem Augers</u> <u>2" OD Split Spoon 140lb Hammer</u>	Surface (Circle one): Bare Grassy Wooded																																																																																																																																																						
* Refer to back of page																																																																																																																																																							
<table border="1"><thead><tr><th colspan="7">SAMPLES</th><th>Personnel</th></tr><tr><th>USCS</th><th>DESCRIPTION*</th><th>Depth in feet</th><th>MOIST*</th><th>Sample No.</th><th>Sample Recovery</th><th>Lab Anal Y/N</th><th>N Valves (Blows)</th><th>F.I.D. or P.I.D./LEL Readings</th><th>REMARKS</th></tr></thead><tbody><tr><td></td><td><u>Core Not Logged 0-6' bgs</u></td><td>0'</td><td></td><td></td><td></td><td></td><td></td><td></td><td><u>Background H₂N₂ Reading Open</u> <u>Gravel; No Split Spoons Collected</u></td></tr><tr><td></td><td></td><td>6'</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>7'</td><td></td><td></td><td></td><td></td><td></td><td></td><td><u>No Split Spoon Collected</u> <u>Too much backfill with gravel to collect a sample. Water level @ 8' bgs</u></td></tr><tr><td></td><td></td><td>8'</td><td></td><td></td><td></td><td></td><td></td><td></td><td><u>No Split Spoon Collected</u></td></tr><tr><td></td><td></td><td>9'</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>10'</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>SP</td><td><u>10.0'-10.8' 10YR 4/2 Dk. Grayish Brown, Sand, Coarse, Wet</u></td><td>11'</td><td></td><td></td><td><u>40%</u></td><td></td><td><u>6</u> <u>7</u> <u>8</u> <u>9</u></td><td><u>Open</u></td><td><u>Geotech Sample Collected</u></td></tr><tr><td>SP</td><td><u>10.8'-10.9' 10YR 3/2 Grayish Brown, Sand, Medium</u></td><td>12'</td><td></td><td></td><td></td><td></td><td></td><td></td><td><u>No Split Spoon Collected</u></td></tr><tr><td></td><td></td><td>13'</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>14'</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>SW</td><td><u>14.0'-14.5' 10YR 4/3 Pale Brown, Sand, Coarse, w/ quartzite pebbles, well rounded, well sorted</u></td><td>15'</td><td></td><td></td><td><u>70%</u></td><td></td><td><u>9</u> <u>9</u> <u>10</u> <u>4</u></td><td><u>Open</u></td><td></td></tr><tr><td>SP</td><td><u>14.5'-15.0' 2.5Y 4/3 Olive Brown, Granules with Sand, poorly sorted</u></td><td>16'</td><td></td><td></td><td></td><td></td><td></td><td></td><td><u>Bottom of Boring 16' bgs</u></td></tr><tr><td>SW</td><td><u>15.0'-15.4' 2.5Y 4/3 Olive Brown, Sand, Fine to Medium</u></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>				SAMPLES							Personnel	USCS	DESCRIPTION*	Depth in feet	MOIST*	Sample No.	Sample Recovery	Lab Anal Y/N	N Valves (Blows)	F.I.D. or P.I.D./LEL Readings	REMARKS		<u>Core Not Logged 0-6' bgs</u>	0'							<u>Background H₂N₂ Reading Open</u> <u>Gravel; No Split Spoons Collected</u>			6'										7'							<u>No Split Spoon Collected</u> <u>Too much backfill with gravel to collect a sample. Water level @ 8' bgs</u>			8'							<u>No Split Spoon Collected</u>			9'										10'								SP	<u>10.0'-10.8' 10YR 4/2 Dk. Grayish Brown, Sand, Coarse, Wet</u>	11'			<u>40%</u>		<u>6</u> <u>7</u> <u>8</u> <u>9</u>	<u>Open</u>	<u>Geotech Sample Collected</u>	SP	<u>10.8'-10.9' 10YR 3/2 Grayish Brown, Sand, Medium</u>	12'							<u>No Split Spoon Collected</u>			13'										14'								SW	<u>14.0'-14.5' 10YR 4/3 Pale Brown, Sand, Coarse, w/ quartzite pebbles, well rounded, well sorted</u>	15'			<u>70%</u>		<u>9</u> <u>9</u> <u>10</u> <u>4</u>	<u>Open</u>		SP	<u>14.5'-15.0' 2.5Y 4/3 Olive Brown, Granules with Sand, poorly sorted</u>	16'							<u>Bottom of Boring 16' bgs</u>	SW	<u>15.0'-15.4' 2.5Y 4/3 Olive Brown, Sand, Fine to Medium</u>								
SAMPLES							Personnel																																																																																																																																																
USCS	DESCRIPTION*	Depth in feet	MOIST*	Sample No.	Sample Recovery	Lab Anal Y/N	N Valves (Blows)	F.I.D. or P.I.D./LEL Readings	REMARKS																																																																																																																																														
	<u>Core Not Logged 0-6' bgs</u>	0'							<u>Background H₂N₂ Reading Open</u> <u>Gravel; No Split Spoons Collected</u>																																																																																																																																														
		6'																																																																																																																																																					
		7'							<u>No Split Spoon Collected</u> <u>Too much backfill with gravel to collect a sample. Water level @ 8' bgs</u>																																																																																																																																														
		8'							<u>No Split Spoon Collected</u>																																																																																																																																														
		9'																																																																																																																																																					
		10'																																																																																																																																																					
SP	<u>10.0'-10.8' 10YR 4/2 Dk. Grayish Brown, Sand, Coarse, Wet</u>	11'			<u>40%</u>		<u>6</u> <u>7</u> <u>8</u> <u>9</u>	<u>Open</u>	<u>Geotech Sample Collected</u>																																																																																																																																														
SP	<u>10.8'-10.9' 10YR 3/2 Grayish Brown, Sand, Medium</u>	12'							<u>No Split Spoon Collected</u>																																																																																																																																														
		13'																																																																																																																																																					
		14'																																																																																																																																																					
SW	<u>14.0'-14.5' 10YR 4/3 Pale Brown, Sand, Coarse, w/ quartzite pebbles, well rounded, well sorted</u>	15'			<u>70%</u>		<u>9</u> <u>9</u> <u>10</u> <u>4</u>	<u>Open</u>																																																																																																																																															
SP	<u>14.5'-15.0' 2.5Y 4/3 Olive Brown, Granules with Sand, poorly sorted</u>	16'							<u>Bottom of Boring 16' bgs</u>																																																																																																																																														
SW	<u>15.0'-15.4' 2.5Y 4/3 Olive Brown, Sand, Fine to Medium</u>																																																																																																																																																						



MONITORING WELL CONSTRUCTION LOG - Standard			Rev: 10/94
Site ID: MW12-03	Installation: Joe Foss Field	Site: MW12-03	
Project No.: 3423	Client / Project: SDANG	Organization (Drilling Contractor): Layne-Western Company, Inc.	
Built by: Tracey Bugg	Driller: Lyle Porter		
Comp. Start: 7/15/95	Comp. End: 7/16/95	Well Coord.:	

DEPTH (FEET)	CASES	PROTECTIVE COVER	Flush Mount		
	Height:	Material Type:	Diameter of Protective Casing [CASES]:	Height:	
	STKUP	Mortar Collar Height:	Depth BGS:	Drainage Hole ()	Size:
	flush	GUARD POSTS			
	GS Elevation:	Yes <input checked="" type="radio"/> No <input type="radio"/>	Configuration: Type:		
	GS Height:	SURFACE PAD			
	Depth BGS:	Material:	Size:		
		RISER PIPE			
		Type: PVC	Length [CASE]:	Diameter [CASED]:	
		GROUT			
	Composition: Portland				
	Proportions:				
	Interval:				
	Method (See back):				
	1'	Tremmed: YES NO			
	CASE NO				
	CASED NO				
	SEAL (BSEAL)				
	2'	Type: Econoplug - Medium	Source:		
	5.75' FL	Setup / Hydration time: 24 hours	Vol. Fluid Added: 3 gal	Tremmed: <input checked="" type="radio"/> YES <input type="radio"/> NO	
	SCREEN (SCREN)				
	Type: PVC				
	Manufacturer: Campbell Monoflex				
	9.25'	Diameter (ID): 4"	10'		
	Slot Size: DID				
	Schedule/Thickness: 40				
	Method (See back):				
	15' Ft.				
	NA FL				
	15.75'				
	BACKFILL PLUG (BFILL)				
	25'	Material: Sand	CENTRALIZERS ()		
	TOTAL DEPTH (DPTOT)	Setup / Hydration time:	Type:		
	16' FL	Method (See back):	Depth(s):		
	.85'	Tremmed: <input checked="" type="radio"/> YES <input type="radio"/> NO			
	Borehole Dia.				



Field Boring Log

Page 1 of 2

Site File No.	County <u>Minnehaha</u>	Boring No. <u>MW12-04</u>	Monitor Well No. <u>MW12-04</u>
Site File Name <u>SDANG Joe Foss Field</u>	Surface Elev.		Completion Depth <u>16' bgs</u>
Fed ID No.	Auger Depth <u>16' bgs</u>		Rotary Depth <u>NA</u>
State Planar Coordinates: N. E.		Date: Start <u>7/5/95</u> Time <u>1555</u> Finish <u>7/5/95</u> Time <u>1710</u>	
Borehole status (BSTAT)*:		Ground water Depth: <u>7.75' bgs</u> Method (See back):	
Drilling Equipment: <u>Acker Hollow Stem Auger Drill Rig</u> <u>8" ID Hollow Stem Augers</u> <u>2" OD Split Spoon 140 lb Hammer</u>		Surface (Circle one): Bare Grassy Wooded	

* Refer to back of page

USCS	DESCRIPTION*	Depth in feet	SAMPLES						Personnel	
			MOIST*	Sample No.	Sample Recovery	Lab Anal Y/N	N Valves (Blows)	F.T.D. or P.T.D./ LEL Readings	REMARKS	
	Core Not Logged 0-6' bgs	0'							No Split Spoons Collected	
SP	6.0'-6.3' 10R 4/3 Weak Red, Sand, Med. Dry	6'					14		Wet at 7.75' bgs	
SP	6.3'-7.8' 10R 3/3 Dark Brown, Sand, Med. Wet	7'			95%		20 16 14	0ppm		
		8'							No Split Spoon Collected	
		9'								
SP	10.0'-10.8' 2.5Y 4/3 to 3/3 Olive Brown to Dark Olive Brown. Sand, med to coarse, some pebbles	10'					4			
		11'			60%		10 11 12	0ppm		
SP	10.8'-11.2' SAME AS ABOVE EXCEPT 10YR 3/2 Very Dark Brown	12'							No Split Spoon Collected	
		13'								
SP	14.0'-14.2' 5Y 3/2 Dark Olive Gray. Sand, Fine to Med. with pebbles	14'					4			
		15'			10%		7 8 9	0ppm		
		16'							Bottom of Boring 16' bgs	



MONITORING WELL CONSTRUCTION LOG - Standard			Rev: 10/94
Site ID: MW12-04	Installation: Joe Foss Field	Site: MW12-04	
Project No.: 3423	Client / Project: SDANG	Organization (Drilling Contractor): Layne-Western Company, Inc.	
Built by: Tracey Bugg	Driller: Lyle Porter		
Comp. Start: 7/15/95	Comp. End: 7/15/95	Well Coord.:	

PROTECTIVE COVER		Flush Mount
Material Type:	Diameter of Protective Casing [CASES]:	Height:
Mortar Collar Height:	Depth BGS:	Drainage Hole ()
Size:		

GUARD POSTS	
Yes / <input checked="" type="radio"/> No	No.: Configuration: Type:

SURFACE PAD	
Material:	Size:

RISER PIPE	
Type: PVC	Length [CASE]: Diameter [CASED]:

GROUT	
Composition: Portland	
Proportions:	
Interval:	
Method (See back):	
Tremmed: YES <input checked="" type="radio"/> NO	Too Shallow

SEAL (BSEAL)	
Type: Econoplug - medium	Source:
Setup / Hydration time: 17.5 hours	Vol. Fluid Added: 3 gal Tremmed: YES <input checked="" type="radio"/> NO

SCREEN (SCREN)	
Type: PVC	
Manufacturer: Campbell Monoflex	
Diameter (ID): 4"	
Slot Size: 010	
Schedule/Thickness: 40	
Method (See back):	

GRAVEL FILTER (GFILT)	
FILTER PACK	
Type: Morie GA9	
Amount Used: 6 bags	
Gr. Size Dist.: for 010	
Source:	
Tremmed: YES <input checked="" type="radio"/> NO	

BACKFILL PLUG (BFILL)	
Material: Sand	
Setup / Hydration time:	
Method (See back):	Tremmed: YES NO

CENTRALIZERS()	
Type:	
Depth(s):	

TOTAL DEPTH (DPTOT)	
16 Ft.	

Borehole Dia.	
.85'	

DEPTH (FEET)

CASES

STKUP Flush

GS Elevation:

GS Height:

Depth BGS:

Casing Height:

CASE No

CASED No

5.75 Ft.

15 Ft.

NA Ft.

15.75 Ft.

.25'

.85'



Field Boring Log

Page 1 of 2

Site File No.		County <u>Minnehaha</u>		Boring No. <u>MW12-05</u>		Monitor Well No. <u>MW12-05</u>			
Site File Name <u>SDANG Joe Foss Field</u>				Surface Elev.		Completion Depth <u>16' bgs</u>			
Fed ID No.				Auger Depth <u>16' bgs</u>		Rotary Depth <u>NA</u>			
State Planar Coordinates: N. E.				Date: Start <u>7/5/95</u> Time <u>1755</u> Finish <u>7/5/95</u> Time <u>1910</u>					
Borehole status (BSTAT)*:				Ground water Depth:		Method (See back):			
Drilling Equipment: <u>Acker Hollow Stem Auger Drill Rig</u> <u>8" ID Hollow Stem Augers</u> <u>2" OD Split Spoon 140 lb Hammer</u>				Surface (Circle one): Bare Grassy Wooded					
Refer to back of page				SAMPLES				Personnel	
				MOIST* Sample No. Sample Recovery Lab Anal Y/N N Valves (Blows) F.T.D. or P.T.D./ LEL Readings				G- Tracey Bugg D- Lyle Porter H- Mark Lesly H-	
USCS	DESCRIPTION*	Depth in feet	REMARKS						
	Core Not Logged 0-6' bgs	0	No Split Spoons Collected Background HNu Reading 0ppm						
SP	6.0'-6.25' 2.5Y 4/2 Lt. Olive Brown, Sand, Fine to Medium	6'	Water level at 6.6' bgs						
OH	6.25'-6.5' 10YR 3/2 V. DK. Brown, Silt, Very Plastic, Wet	7'	80% 5 5 6 7 0ppm						
SP	6.5'-7.5' 10YR 3/3 Dark Brown, Sand, medium	8'	No Split Spoon Collected						
SP	10.0'-10.25' 2.5Y 3/3 Dark Olive Brown, Sand, medium	9'							
SP	10.25'-10.8' 10YR 3/2 V. DK. Brown, Sand, coarse to granules	10'	60% 3 4 5 7 0ppm						
SP	10.8'-11.1' 2.5Y 3/2 V. DK. Grayish Brown, Sand, Fine to Medium	11'	No Split Spoon Collected						
SP	14.0'-14.5' 2.5Y 4/2 Dark Grayish Brown Sand, Medium	12'							
GP	14.5'-14.8' 2.5Y 3/2 V. DK. Grayish Brown Pebbles with some granules	13'	90% 10 12 13 14 0ppm						
SP	14.8'-15.8' 2.5Y 5/2 Grayish Brown, Sand, Fine	14'	Bottom of Boring 16' bgs						



MONITORING WELL CONSTRUCTION LOG - Standard			Rev: 10/94
Site ID: MW12-05	Installation: Joe Foss Field	Site: MW12-05	
Project No.: 3423	Client / Project: SDANG	Organization (Drilling Contractor): Layne-Western Company, Inc.	
Built by: Tracey Bugg	Driller: Lyle Porter		
Comp. Start: 7/15/95	Comp. End: 7/15/95	Well Coord.:	

DEPTH (FEET)	Casing Height:	PROTECTIVE COVER	Flush Mount	Diameter of Protective Casing [CASES]:	Height:	
	Height:	Material Type:				
	STKUP	Mortar Collar Height:	Depth BGS:	Drainage Hole ()	Size:	
	Flush	GUARD POSTS	Yes / <input checked="" type="radio"/> No	No.:	Configuration:	Type:
	GS Elevation:	SURFACE PAD	Material:	Size:		
	GS Height:	RISER PIPE	Type: PVC	Length [CASE]:	Diameter [CASED]:	
	Depth BGS:	GROUT	Composition: Portland	Proportions:	Interval:	Method (See back):
		1'	Tremmied: YES <input checked="" type="radio"/> NO	Too Shallow		
	CASE					
	CASED					
	SEAL (BSEAL)	2'	Type: Econoplug Medium	Source:		
	5.75' FL	Setup / Hydration time: 18 hours	Vol. Fluid Added: 3 gal	Tremmied: <input checked="" type="radio"/> YES	NO	
	SCREEN (SCREN)	Type: PVC	Manufacturer: Campbell Monoflex	Amount Used: 6 1/4 bags		
	9.25'	Diameter (ID): 4"	Slot Size: 010	Gr. Size Dist.:		
	15 Ft.	Schedule/Thickness: 40	Method (See back):	Source		
	NA FL	10'	Tremmied: <input checked="" type="radio"/> YES	NO		
	15.75' FL	BACKFILL PLUG (BFILL)	Material: Sand	Setup / Hydration time:		
	TOTAL DEPTH (DPTOT)	.25'	Method (See back):	Tremmied: <input checked="" type="radio"/> YES	NO	
	16 FL	CENTRALIZERS ()	Type:	Depth(s):		
	.85'					
	Borehole Dia.					



Field Boring Log

Page 1 of 2

Site File No.	County <u>Minnehaha</u>	Boring No. <u>MW13-01</u>	Monitor Well No. <u>MW13-01</u>
Site File Name <u>SDANG Joe Foss Field</u>		Surface Elev.	Completion Depth <u>20' bgs</u>
Fed ID No.		Auger Depth <u>20' bgs</u>	Rotary Depth <u>NA</u>
State Planar Coordinates: <u>N.</u>	<u>E.</u>	Date: Start <u>7/13/95</u> Time <u>1410</u> Finish <u>7/13/95</u> Time <u>1845</u>	

Borehole status (BSTAT)*:	Ground water Depth:	Method (See back):
Drilling Equipment:	Surface (Circle one):	Bare Grassy Wooded

Acker Hollow Stem Auger Drill Rig
 4" ID Hollow Stem Augers
 2" OD Split Spoon 140 lb Hammer

Refer to back of page

USCS	DESCRIPTION*	Depth in feet	MOIST*	Sample No.	Sample Recovery	Lab Anal Y/N	N Valves (Blows)	F.I.D. or P.I.D./LEL Readings	Personnel	REMARKS
	Asphalt 0-1.3'	0							G - Tracey Bug	
		1							D - Lyle Porter	
		2							H - Mark Lesly	
		3							H -	
CH	4.0-4.9' 10YR 3/4 Black, Clay, High Plasticity, Dry	4					4			
		5			40%		4	0 ppm		
		6					6			
		7								No Split Spoon Collected
CH	8.0-8.25' SAME AS ABOVE	8					11			
CL	8.25-8.6' 10YR 1/2 Dark Grayish Brown, Clay with Sand, Moist	9			50%		12	0 ppm		
SC	8.6-8.85' 10YR 3/3 Dark Brown, Sand, med, with Clay	10					12			
CL	8.85-9.00' 10YR 3/4 Black, Clay, with Sand, med., Dry	11					14			Water Level at 11.4' bgs
ML	10.0-10.25' 10YR 3/3 Dark Brown, Silt, Wet	12								Shelby Tube Collected
SP	10.25-10.75' 10YR 5/2 Grayish Brown, Sand, med. with some pebbles	13								
GC	10.75-11.0' 10YR 1/3 Dark Brown, Gravel with Pebbles	14								No Split Spoons Collected
		15								
		16								
		17								
SP	18'-18.5' 10YR 3/2 V. DK. Grayish Brown, Sand, Fine grading to med.	18			90%		5	0 ppm		
SW	18.5-19.2' 10YR 3/2 V. DK. Grayish Brown, Sand, Course grading to gravel, with Pebbles	19					7			
SP	19.2-19.8' Sand, Course, Poorly Sorted	20					6			Bottom of Boring 20' bgs



MONITORING WELL CONSTRUCTION LOG - Standard			Rev: 10/94
Site ID: MW13-01	Installation: Joe Foss Field	Site: MW13-01	
Project No.: 3423	Client / Project: SDANG	Organization (Drilling Contractor): Lyle-Western Company Inc	
Built by: Tracey Bugg	Driller: Lyle Porter		
Comp. Start: 7/13/95	Comp. End: 7/13/95	Well Coord.:	

DEPTH (FEET)	PROTECTIVE COVER		Flush Mounts
	Material Type:	Diameter of Protective Casing (CASES):	
	Mortar Collar Height:	Depth BGS:	Drainage Hole ()
	GUARD POSTS		
	Yes / <input checked="" type="radio"/> No	No.:	Configuration: Type:
	SURFACE PAD		
	Material:	Size:	
	RISER PIPE		
	Type: PVC	Length (CASE):	Diameter (CASED): 2"
	GROUT		
Composition: Portland			
Proportions:			
Interval:			
Method (See back):			
Tremied: YES <input checked="" type="radio"/> NO			
CASE No			
CASED No			
SEAL (BSEAL)			
2' Type: Peltonite			
Source:			
Setup / Hydration time:			
Vol. Fluid Added: 3 gal Tremied: YES <input checked="" type="radio"/> NO			
GRAVEL FILTER (GFILT)			
FILTER PACK			
Type: Morie GA9			
Amount Used: 3 1/2 (Possible Bridging)			
Gr. Size Dist.:			
Source			
Tremied: YES <input checked="" type="radio"/> NO			
SCREEN (SCREN)			
Type: PVC			
Manufacturer: Campbell Monoflex			
Diameter (ID): 2"			
Slot Size: 010			
Schedule/Thickness: 40			
Method (See back):			
19 Ft.			
Ft.			
1.75 Ft.			
BACKFILL PLUG (BFILL)			
Material: Sand			
Setup / Hydration time:			
Method (See back): Tremied: YES <input checked="" type="radio"/> NO			
CENTRALIZERS ()			
Type:			
Depth(s):			
TOTAL DEPTH (DPTOT) 20 Ft.			
.38' Borehole Dia.			

APPENDIX E. ANALYTICAL REPORTS

THIS PAGE WAS INTENTIONALLY LEFT BLANK

Huntingdon

Huntingdon Engineering & Environmental, Inc.
601 East 48th Street North
Sioux Falls, South Dakota 57104-0698
(605) 332-5371
Fax: (605) 332-8488

REPORT OF: CHEMICAL ANALYSIS

PROJECT: SAIC

DATE: September 12, 1995

REPORTED TO: SAIC
PAT PATEL
1710 GOODRIDGE DRIVE
MCLEAN VA 22102

LABORATORY NO: 6610 95-170

Date Received: 8-30-95

Date Sampled: 8-29-95

Authorization: Job No. 01-0513-04-3423

The results of the BETX analysis are listed in Table 1. The results of the TPH analysis are listed in Table 2. The results of the solvents analysis will be reported under separate cover as they become available.

TABLE 1
VOLATILE ANALYSIS

Client Sample ID	FB05	FB06	EB06	TB06	MW1-13-02 Area 13	MW2-13-02 Area 13	
	0827950910	0827950910	0827950930	082795	0827951030	0827951030	
Parameter	95-7154	95-7155	95-7156	95-7157	95-7158	95-7159	MDL
Total Hydrocarbons as Gasoline	<7	<7	<7	<7	<7	<7	7
Benzene	<1	<1	<1	<1	<1	<1	1
Toluene	<1	<1	<1	<1	<1	<1	1
Xylenes	<1	<1	<1	<1	<1	<1	1
Ethylbenzene	<1	<1	<1	<1	<1	<1	1

SURROGATE

RECOVERY:

α, α, α -Trifluorotoluene	96%	96%	92%	95%	95%	96%
--	-----	-----	-----	-----	-----	-----

All values are in ug/L. ug/L is equivalent to parts per billion.

MDL - Method Detection Limit

Date Analyzed: 9-7, 9-8, 9-9-95

USEPA SW846 Method 8020

Huntingdon

REPORT OF: CHEMICAL ANALYSIS

LABORATORY NO. 6610 95-170

DATE: September 12, 1995

PAGE: 2

TABLE 1 (cont.)
VOLATILE ANALYSIS


Client Sample ID	MW1-12-02 Area 12 0827951320	MW2-12-02 Area 12 0827951800	MW3-12-02 Area 12 0827951640	MW4-12-02 Area 12 0827951536	MW5-12-02 Area 12 0827951420	MW6-12-02 Area 12 0827951230	MDL
Parameter	95-7160	95-7161	95-7162	95-7163	95-7164	95-7165	
Total Hydrocarbons as Gasoline	340	<7	<7	<7	<7	<7	7
Benzene	<1	<1	<1	<1	<1	<1	1
Toluene	<1	<1	<1	<1	<1	<1	1
Xylenes	<1	<1	<1	<1	<1	<1	1
Ethylbenzene	<1	<1	<1	<1	<1	<1	1
SURROGATE RECOVERY:							
α,α,α -Trifluorotoluene	97%	97%	97%	98%	94%	93%	

All values are in ug/L. ug/L is equivalent to parts per billion.

MDL - Method Detection Limit

Date Analyzed: 9-7, 9-8, 9-9-95

USEPA SW846 Method 8020

Technical Review: 

LABORATORY QUALITY CONTROL

ACCURACY DATA

PRECISION DATA

Parameter	Sample #	Matrix Spike Percent Recovery	Matrix Spike Duplicate Percent Recovery	Relative Percent Difference
Benzene	95-7159	102%	101%	0.8%
Toluene	95-7159	102%	101%	0.8%
Xylene	95-7159	102%	100%	1.9%
Ethylbenzene	95-7159	102%	100%	2.5%

Huntingdon

Huntingdon Engineering & Environmental, Inc.
601 East 48th Street North
Sioux Falls, South Dakota 57104-0698
(605) 332-5371
Fax: (605) 332-8488

REPORT OF: CHEMICAL ANALYSIS

PROJECT: SAIC

DATE: September 8, 1995

REPORTED TO: SAIC
PAT PATEL
1710 GOODRIDGE DRIVE
MCLEAN VA 22102

LABORATORY NO: 6610 95-170

Date Received: 8-30-95

Date Sampled: 8-29-95

Authorization: Job No. 01-0513-04-3423

The results of the TPH analysis are listed in Table 1.

TABLE 1
TOTAL PETROLEUM
HYDROCARBONS ANALYSIS

<u>Sample Identification</u>	<u>Client Sample ID</u>	<u>Total Petroleum</u> <u>Hydrocarbons (mg/L)</u>	<u>SURROGATE</u> <u>RECOVERY:</u> <u>Triacontane</u>
95-7166	Area 13, MW1-13-02	<0.1	85%
95-7167	Area 13, MW2-13-02	<0.1	82%
95-7168	Area 12, MW1-12-02	0.30	74%
95-7169	Area 12, MW2-12-02	<0.1	92%
95-7170	Area 12, MW3-12-02	<0.1	80%
95-7171	Area 12, MW4-12-02	<0.1	95%
95-7172	Area 12, MW5-12-02	<0.1	78%
95-7173	Area 12, MW6-12-02	<0.1	76%
95-7174	MS01	<0.1	105%
95-7175	MS001	<0.1	89%
95-7176	TB06	<0.1	105%
PQL		0.1	

Samples were quantified as #2 fuel oil.

All values are in mg/L which is equivalent to parts per million (ppm).

PQL - Practical Quantitation Limit

Date Extracted: 8-31-95

Date Analyzed: 9-1-95

USGS/California Method

Huntingdon

REPORT OF: CHEMICAL ANALYSIS

LABORATORY NO. 6610 95-170

DATE: September 12, 1995

PAGE: 3

TABLE 2
TOTAL PETROLEUM
HYDROCARBONS ANALYSIS

<u>Sample Identification</u>	<u>Client Sample ID</u>	<u>Total Petroleum Hydrocarbons (mg/L)</u>	<u>SURROGATE RECOVERY:</u>
			<u>Triacontane</u>
95-7154	FB05	<0.1	95%
95-7155	FB06	<0.1	99%
95-7156	EB06	<0.1	93%
PQL		0.1	

Samples were quantified as #2 fuel oil.

All values are in mg/L which is equivalent to parts per million (ppm).

PQL - Practical Quantitation Limit

Date Extracted: 8-31-95

Date Analyzed: 9-1-95

USGS/California Method

Technical Review: *SVH*

LABORATORY QUALITY CONTROL

<u>Parameter</u>	<u>ACCURACY DATA</u>		<u>PRECISION DATA</u>
	<u>Matrix Spike Percent Recovery</u>	<u>Matrix Spike Duplicate Percent Recovery</u>	<u>Relative Percent Difference</u>
TPH	101%	104%	2.3%
Surrogate Recovery	104%	104%	—

HUNTINGDON ENGINEERING & ENVIRONMENTAL, INC.

[Signature]
Virginia VerMulh
Laboratory Supervisor

[Signature]
Dan T. Hanson
Chemistry Manager

REPORT OF: CHEMICAL ANALYSIS

LABORATORY NO. 6610 95-170


DATE: September 8, 1995


PAGE: 2

LABORATORY QUALITY CONTROL

<u>Parameter</u>	<u>ACCURACY DATA</u>		<u>PRECISION DATA</u>
	<u>Matrix Spike Percent Recovery</u>	<u>Matrix Spike Duplicate Percent Recovery</u>	<u>Relative Percent Difference</u>
TPH	101 %	104 %	2.3 %
Surrogate Recovery	104 %	104 %	—

HUNTINGDON ENGINEERING & ENVIRONMENTAL, INC.

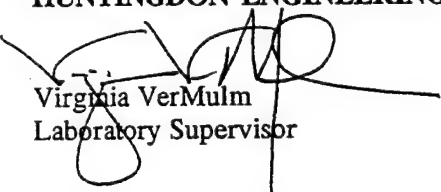
Virginia VerMulin
Laboratory Supervisor


Dan T. Hanson
Chemistry Manager

REPORT OF: CHEMICAL ANALYSIS

PROJECT: SAIC

DATE: August 14, 1995

REPORTED TO: SAIC
PAT PATEL
1710 GOODRIDGE DRIVE
MCLEAN VA 22102

LABORATORY NO: 6610 95-170

Date Received: 7-19-95
Date Sampled: 7-18-95
Authorization: Job No. 01-0513-04-3423

The results of the BETX analysis are listed in Table 1. The results of the TPH analysis are listed in Table 2. The results of the solvents analysis will be reported under separate cover as they become available.

TABLE 1
VOLATILE ANALYSIS

Client Sample ID	TB05 0718950950 95-6150	FB03 0718950955 95-6151	FB04 0718951000 95-6152	MW1-13-01 Area 13 0718951110 95-6153	MW2-13-1 Area 13 0718951145 95-6154	EB05 0718951130 95-6155	MDL
Total Hydrocarbons as Gasoline	<7	<7	<7	<7	<7	<7	7
Benzene	<1	<1	<1	<1	<1	<1	1
Toluene	<1	<1	<1	<1	<1	<1	1
Xylenes	<1	<1	<1	<1	<1	<1	1
Ethylbenzene	<1	<1	<1	<1	<1	<1	1

SURROGATE

RECOVERY:

α, α, α -Trifluorotoluene	112%	107%	106%	106%	104%	105%
--	------	------	------	------	------	------

All values are in ug/L. ug/L is equivalent to parts per billion.

MDL - Method Detection Limit

Date Analyzed: 7-29, 7-31-95

USEPA SW846 Method 8020

REPORT OF: CHEMICAL ANALYSIS

LABORATORY NO. 6610 95-170

DATE: August 14, 1995

PAGE: 2

TABLE 1 (cont.)
VOLATILE ANALYSIS

Client Sample ID	MW2-12-1 0718951300	MW6-12-1 0718951330	MW3-12-01 0718951450	MW4-12-01 0718951600	MW5-12-01 0718951650	MW1-12-01 0718951410	
Parameter	95-6156	95-6157	95-6158	95-6159	95-6160	95-6161	MDL
Total Hydrocarbons as Gasoline	<7	<7	<7	<7	<7	81	7
Benzene	<1	<1	<1	<1	<1	<1	1
Toluene	<1	<1	<1	<1	<1	<1	1
Xylenes	<1	<1	<1	<1	<1	<1	1
Ethylbenzene	<1	<1	<1	<1	<1	<1	1

SURROGATE

RECOVERY:

α, α, α -Trifluorotoluene	106%	107%	107%	104%	105%	108%
--	------	------	------	------	------	------

All values are in ug/L. ug/L is equivalent to parts per billion.

MDL - Method Detection Limit

Date Analyzed: 7-29, 7-31-95

USEPA SW846 Method 8020

LABORATORY QUALITY CONTROL

ACCURACY DATA

PRECISION DATA

Parameter	Sample #	Matrix Spike Percent Recovery	Matrix Spike Duplicate Percent Recovery	Relative Percent Difference
Benzene	95-6154	105%	104%	0.8%
Toluene	95-6154	105%	104%	0.8%
Xylene	95-6154	105%	102%	3.2%
Ethylbenzene	95-6154	105%	101%	4.0%

Huntingdon

REPORT OF: CHEMICAL ANALYSIS

LABORATORY NO. 6610 95-170

DATE: August 14, 1995

PAGE: 3

VOLATILE:BTEX LABORATORY CONTROL SAMPLE DATA (Percent Recovery, %)

Parameter	7-29-95	7-31-95
Benzene	103	99
Toluene	103	100
Xylene	103	100
Ethylbenzene	103	100

VOLATILE:BETX CONTINUING CALIBRATION DATA (Percent Recovery, %)

Parameter	7-29-95	7-31-95
Benzene	101	103
Toluene	100	102
Xylene	100	103
Ethylbenzene	99	102

VOLATILE:BETX METHOD BLANK DATA

7-29-95	7-31-95
<1	<1

Huntingdon

REPORT OF: CHEMICAL ANALYSIS

LABORATORY NO. 6610 95-170

DATE: August 14, 1995

PAGE: 4

TABLE 2
TOTAL PETROLEUM
HYDROCARBONS ANALYSIS

<u>Sample Identification</u>	<u>Client Sample ID</u>	<u>Total Petroleum Hydrocarbons (mg/L)</u>	<u>SURROGATE RECOVERY:</u>
			<u>Pentacosane</u>
95-6150	TB05	<0.1	95 %
95-6151	FB03	<0.1	94 %
95-6152	FB04	<0.1	97 %
95-6153	MW1-13-01	<0.1	76 %
95-6154	MW2-13-1	<0.1	74 %
95-6155	EB05	<0.1	96 %
95-6156	MW2-12-1	<0.1	74 %
95-6157	MW6-12-1	<0.1	84 %
95-6158	MW3-12-01	<0.1	98 %
95-6159	MW4-12-01	<0.1	81 %
95-6160	MW5-12-01	<0.1	87 %
95-6161	MW1-12-01	<0.1	73 %
MDL		0.1	

Samples were quantified as #2 fuel oil.

All values are in mg/L which is equivalent to parts per million (ppm).

MDL - Method Detection Limit

Date Extracted: 7-25-95

Date Analyzed: 7-26-95

USGS/California Method

LABORATORY QUALITY CONTROL

<u>Parameter</u>	<u>ACCURACY DATA</u>		<u>PRECISION DATA</u>
	<u>Matrix Spike Percent Recovery</u>	<u>Matrix Spike Duplicate Percent Recovery</u>	<u>Relative Percent Difference</u>
TPH	89 %	107 %	18 %
Surrogate Recovery	99 %	102 %	—

Huntingdon

REPORT OF: CHEMICAL ANALYSIS

LABORATORY NO. 6610 95-170

DATE: August 14, 1995

PAGE: 5

**TOTAL PETROLEUM HYDROCARBONS
LABORATORY CONTROL SAMPLE DATA**

7-26-95

Percent Recovery	90%
------------------	-----

**TOTAL PETROLEUM HYDROCARBONS
CONTINUING CALIBRATION DATA**

7-26-95


Percent Recovery CC1	104%
Percent Recovery CC2	110%
Percent Recovery CC3	86%


**TOTAL PETROLEUM HYDROCARBONS
METHOD BLANK DATA**

7-26-95

<0.1

HUNTINGDON ENGINEERING & ENVIRONMENTAL, INC.

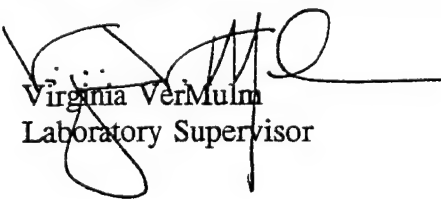
Virginia Vermulm
Laboratory Supervisor


Dan T. Hanson
Chemistry Manager

Huntingdon

Huntingdon

Huntingdon Engineering & Environmental, Inc.
601 East 48th Street North
Sioux Falls, South Dakota 57104-0898
(605) 332-5371
Fax: (605) 332-8488

REPORT OF: CHEMICAL ANALYSIS

PROJECT: SAIC

DATE: July 6, 1995

REPORTED TO: SAIC
PAT PATEL
655 METRO PLACE S
SUITE 745
DUBLIN OH 43017

LABORATORY NO: 6610 95-170

Date Received: 6-14-95

Date Sampled: 6-13-95

Authorization: Job No. 01-0513-04-3423

The results of the BETX analysis are listed in Table 1. The results of the TPH analysis are listed in Table 2.

TABLE 1
VOLATILE ANALYSIS

Client Sample ID	GS01-1 Area 12 0613951115 95-5329	GS01-3 Area 12 0613951205 95-5330	GS02-1 Area 12 0613951425 95-5331	GS02-3 Area 12 0613951445 95-5332	GS03-1 Area 12 0613951520 95-5333	GS03-3 Area 12 0613951550 95-5334	MDL
Total Hydrocarbons as Gasoline	<7	<7	<7	<7	<7	<7	7
Benzene	<1	<1	<1	<1	<1	<1	1
Toluene	<1	<1	<1	<1	<1	<1	1
Xylenes	<1	<1	<1	<1	<1	<1	1
Ethylbenzene	<1	<1	<1	<1	<1	<1	1

SURROGATE

RECOVERY:

α, α, α -Trifluorotoluene	92%	100%	95%	97%	91%	96%
--	-----	------	-----	-----	-----	-----

All values are in ug/kg. ug/kg is equal to parts per billion.

MDL - Method Detection Limit

Date Analyzed: 6-14, 6-15, 6-16, 6-19, 6-21-95

USEPA SW846 Method 8020

REPORT OF: CHEMICAL ANALYSIS

LABORATORY NO. 6610 95-170

DATE: July 6, 1995

PAGE: 2

TABLE 1 (cont.)
VOLATILE ANALYSIS

Client Sample ID	GS04-1 Area 12 0613951717	GS04-3 Area 12 0613951740	GS05-2 Area 12 0613951830	GS05-3 Area 12 0613951840	GS06-2 Area 12 0613951915	TB01 Area 12 0613950800	MDL
Parameter	95-5335	95-5336	95-5337	95-5338	95-5339	95-5340	
Total							
Hydrocarbons as Gasoline	<7	<7	<7	94 ⁻	10 ⁻	<7	7
Benzene	<1	<1	<1	<1	<1	<1	1
Toluene	<1	<1	<1	<1	<1	<1	1
Xylenes	<1	<1	<1	<1	<1	<1	1
Ethylbenzene	<1	<1	<1	<1	<1	<1	1
SURROGATE RECOVERY:							
α,α,α-Trifluorotoluene	94%	99%	96%	96%	97%	98%	

All values are in ug/kg. ug/kg is equal to parts per billion.

* All values are in ug/L. ug/L is equivalent to parts per billion.

MDL - Method Detection Limit

Date Analyzed: 6-16, 6-21-95

USEPA SW846 Method 8020

- Higher boiling hydrocarbons present, nontypical of gasoline.

LABORATORY QUALITY CONTROL

ACCURACY DATA

Parameter	Sample #	Matrix Spike Percent Recovery	Matrix Spike Duplicate Percent Recovery
Benzene	95-5334	93%	95%
Toluene	95-5334	96%	99%
Xylene	95-5334	92%	95%
Ethylbenzene	95-5334	95%	97%

PRECISION DATA

Relative Percent Difference
2.2%
2.2%
3.0%
2.2%

LABORATORY QUALITY CONTROL

ACCURACY DATA

Parameter	Sample #	Matrix Spike Percent Recovery	Matrix Spike Duplicate Percent Recovery
Benzene	95-5337	96%	98%
Toluene	95-5337	98%	100%
Xylene	95-5337	97%	98%
Ethylbenzene	95-5337	100%	100%

PRECISION DATA

Relative Percent Difference
2.1%
2.1%
1.3%
0.0%

Huntingdon

REPORT OF: CHEMICAL ANALYSIS

LABORATORY NO. 6610 95-170

DATE: July 6, 1995

PAGE: 3

Date Received: 6-14-95

Date Sampled: 6-13-95

Authorization: Job No. 01-0513-04-3423

TABLE 1 (cont.)
VOLATILE ANALYSIS

Parameter	TB0-2 0613950800 95-5341	FB01 0613951340 95-5342	FB02 0613951345 95-5343	EB01 0613951040 95-5344	MDL
Total Hydrocarbons as Gasoline	<7	<7	<7	<7	7
Benzene	<1	<1	<1	<1	1
Toluene	<1	<1	<1	<1	1
Xylenes	<1	<1	<1	<1	1
Ethylbenzene	<1	<1	<1	<1	1
SURROGATE RECOVERY:					
α,α,α -Trifluorotoluene	97%	96%	86%	98%	

All values are in ug/L. ug/L is equivalent to parts per billion.

MDL - Method Detection Limit

Date Analyzed: 6-16, 6-19-95

USEPA SW846 Method 8020

LABORATORY QUALITY CONTROL

ACCURACY DATA

PRECISION DATA

Parameter	Sample #	Matrix Spike Percent Recovery	Matrix Spike Duplicate Percent Recovery	Relative Percent Difference
Benzene	95-5343	103 %	106 %	2.3 %
Toluene	95-5343	104 %	107 %	2.4 %
Xylene	95-5343	104 %	106 %	1.9 %
Ethylbenzene	95-5343	103 %	105 %	1.6 %

Huntingdon

REPORT OF: CHEMICAL ANALYSIS

LABORATORY NO. 6610 95-170

DATE: July 6, 1995

PAGE: 4

Date Received: 6-16-95

Date Sampled: 6-15-95

Authorization: Job No. 01-0513-04-3423

TABLE 1 (cont.)
VOLATILE ANALYSIS

Parameter	EB03	EB04	GW12-5	GW12-6	TB03	MDL
	Area 12 0615951145	Area 13 0615951300	Area 12 0615951020	Area 12 0615951020	Areas 12 & 13 0615951020	
	95-5395	95-5396	95-5397	95-5398	95-5399	
Total Hydrocarbons as Gasoline	<7	<7	<7	70	<7	7
Benzene	<1	<1	<1	<1	<1	1
Toluene	<1	<1	<1	<1	<1	1
Xylenes	<1	<1	<1	<1	<1	1
Ethylbenzene	<1	<1	<1	<1	<1	1
SURROGATE RECOVERY:						
α,α,α -Trifluorotoluene	98%	98%	100%	97%	99%	

All values are in ug/L. ug/L is equivalent to parts per billion.

MDL - Method Detection Limit

Date Analyzed: 6-16, 6-19, 6-20, 6-22, 6-23-95

USEPA SW846 Method 8020

LABORATORY QUALITY CONTROL

ACCURACY DATA

PRECISION DATA

Parameter	Sample #	Matrix Spike Percent Recovery	Matrix Spike Duplicate Percent Recovery	Relative Percent Difference
Benzene	95-5399	105%	105%	0.6%
Toluene	95-5399	105%	105%	1.2%
Xylene	95-5399	105%	105%	0.6%
Ethylbenzene	95-5399	105%	105%	0.6%

Huntingdon

REPORT OF: CHEMICAL ANALYSIS**LABORATORY NO. 6610 95-170****DATE: July 6, 1995****PAGE: 5**

Date Received: 6-19-95

Date Sampled: 6-15-95

Authorization: Job No. 01-0513-04-3423

**TABLE 1 (cont.)
VOLATILE ANALYSIS**

	GS13-1-1 Area 13 0615951330	GS13-1-4 Area 13 0615951410	GS13-2-1 Area 13 0615951450	GS13-2-4 Area 13 0615951540	GS13-3-1 Area 13 0615951622	
Parameter	95-5480	95-5481	95-5482	95-5483	95-5484	MDL
Total Hydrocarbons as Gasoline	<7	<7	<7	<7	<7	7
Benzene	<1	<1	<1	<1	<1	1
Toluene	<1	<1	<1	<1	<1	1
Xylenes	<1	<1	<1	<1	<1	1
Ethylbenzene	<1	<1	<1	<1	<1	1
SURROGATE RECOVERY:						
α,α,α -Trifluorotoluene	98%	91%	94%	92%	93%	

All values are in ug/L. ug/L is equivalent to parts per billion.

MDL - Method Detection Limit

Date Analyzed: 6-16, 6-19, 6-20, 6-22, 6-23-95

USEPA SW846 Method 8020

Huntingdon

REPORT OF: CHEMICAL ANALYSIS

LABORATORY NO. 6610 95-170

DATE: July 6, 1995

PAGE: 6

TABLE 1 (cont.)
VOLATILE ANALYSIS

	GS13-3-4 Area 13 0613951720 95-5485	GS13-4-2 Area 13 0613951800 95-5486	GS13-4-4 Area 13 0613951820 95-5487	GS13-4-5 Area 13 0613951840 95-5488	MDL
Parameter					
Total Hydrocarbons as Gasoline	<7	<7	<7	<7	7
Benzene	<1	<1	<1	<1	1
Toluene	<1	<1	<1	<1	1
Xylenes	<1	<1	<1	<1	1
Ethylbenzene	<1	<1	<1	<1	1
SURROGATE RECOVERY:					
α,α,α -Trifluorotoluene	93%	91%	90%	95%	

All values are in ug/L. ug/L is equivalent to parts per billion.

MDL - Method Detection Limit

Date Analyzed: 6-16, 6-19, 6-20, 6-22, 6-23-95

USEPA SW846 Method 8020

LABORATORY QUALITY CONTROL

ACCURACY DATA

PRECISION DATA

Parameter	Sample #	Matrix Spike Percent Recovery	Matrix Spike Duplicate Percent Recovery	Relative Percent Difference
Benzene	95-5481	100%	94%	6.5%
Toluene	95-5481	101%	94%	8.5%
Xylene	95-5481	100%	91%	8.8%
Ethylbenzene	95-5481	101%	93%	8.5%

Huntingdon

REPORT OF: CHEMICAL ANALYSIS

LABORATORY NO. 6610 95-170

DATE: July 6, 1995

PAGE: 7

Date Received: 6-16-95

Date Sampled: 6-16-95

Authorization: Job No. 01-0513-04-3423

TABLE 1 (cont.)
VOLATILE ANALYSIS

Parameter	GW12-1 Area 12 0616950900 95-5438	GW12-2 Area 12 0616950955 95-5439	GW12-03 Area 12 0616951045 95-5440	TB04 Area 12 0616950900 95-5441	GW12-4 Area 12 0616951125 95-5442	MDL
Total Hydrocarbons as Gasoline	<7	<7	<7	<7	<7	7
Benzene	<1	<1	<1	<1	<1	1
Toluene	<1	<1	<1	<1	<1	1
Xylenes	<1	<1	<1	<1	<1	1
Ethylbenzene	<1	<1	<1	<1	<1	1
SURROGATE RECOVERY:						
α,α,α -Trifluorotoluene	97%	97%	99%	95%	96%	

All values are in ug/L. ug/L is equivalent to parts per billion.

MDL - Method Detection Limit

Date Analyzed: 6-19, 6-20-95

USEPA SW846 Method 8020

LABORATORY QUALITY CONTROL

ACCURACY DATA

PRECISION DATA

Parameter	Sample #	Matrix Spike Percent Recovery	Matrix Spike Duplicate Percent Recovery	Relative Percent Difference
Benzene	95-5343	103%	106%	2.3%
Toluene	95-5343	104%	107%	2.4%
Xylene	95-5343	104%	106%	1.9%
Ethylbenzene	95-5343	103%	105%	1.6%

Huntingdon

Huntingdon

Huntingdon Engineering & Environmental, Inc.

1908 Innerbelt Business Center Drive
St. Louis, Missouri 63114-5700

Telephone: (314) 426-0880
Fax: (314) 426-4212

July 6, 1995

Ms. Virginia VerMulm
Maxim/Huntingdon Sioux Falls
601 E. 48th Street N.
Sioux Falls, South Dakota 57104-0698

Dear Ms. VerMulm:

On June 20, 1995, Huntingdon/St.Louis received two water samples and nine soil samples for Volatile Organic analysis. The samples received are:

St.Louis No.

Sioux Falls No.

95003032	95-5396;EB04
95003033	95-5399;TB03
95003034	95-5480;GS13-1-1
95003035	95-5481;GS13-1-4
95003036	95-5482;GS13-2-1
95003037	95-5483;GS13-2-4
95003038	95-5484;GS13-3-1
95003039	95-5485;GS13-3-4
95003040	95-5486;GS13-4-2
95003041	95-5487;GS13-4-4
95003042	95-5488;GS13-4-5

The samples were analyzed using the EPA OLMO1 statement of work. A CLP deliverable is provided. All calibrations, surrogates, internal standards, matrix spike/duplicates, method blanks and lab control samples met the required QC controls.

If you have any questions about this data package, please call me at (314) 426-0880.

Sincerely,



Marti Ward
QA/QC Coordinator/Data Validation

1A
VOLATILE ORGANICS ANALYSIS DATA SHEET

EPA SAMPLE NO.

95-5396

Lab Name: TCT-ST. LOUIS

Contract: 6610-95-170

Lab Code: TCT

Case No.:

SAS No.:

SDG No.: 955396

Matrix: (soil/water) WATER

Lab Sample ID: 95003032

Sample wt/vol: 5 (g/ml) ML

Lab File ID: >E8666

Level: (low/med) LOW

Date Received: 06/20/95

% Moisture: not dec.

Date Analyzed: 06/22/95

GC Column: DB624 ID: 0.53 (mm)

Dilution Factor: 1

Soil Extract Volume: (uL)

Soil Aliquot Volume: (uL)

CAS NO.	COMPOUND	(ug/L or ug/Kg) ug/L	Q
74-87-3	Chloromethane	10	U
74-83-9	Bromomethane	10	U
75-01-4	Vinyl chloride	10	U
75-00-3	Chloroethane	10	U
75-09-2	Methylene Chloride	5	J
67-64-1	Acetone	8	J
75-15-0	Carbon Disulfide	10	U
75-35-4	1,1-Dichloroethene	10	U
75-34-3	1,1-Dichloroethane	10	U
156-59-2	cis-1,2-Dichloroethene	10	U
156-60-5	trans-1,2-Dichloroethene	10	U
67-66-3	Chloroform	10	U
107-06-2	1,2-Dichloroethane	10	U
78-93-3	2-Butanone	10	U
71-55-6	1,1,1-Trichloroethane	10	U
56-23-5	Carbon Tetrachloride	10	U
108-05-4	Vinyl Acetate	10	U
75-27-4	Bromodichloromethane	10	U
78-87-5	1,2-Dichloropropane	10	U
10061-01-5	cis-1,3-Dichloropropene	10	U
79-01-6	Trichloroethene	10	U
124-48-1	Dibromochloromethane	10	U
79-00-5	1,1,2-Trichloroethane	10	U
71-43-2	Benzene	10	U
10061-02-6	trans-1,3-Dichloropropene	10	U
75-25-2	Bromoform	10	U
108-10-1	4-Methyl-2-pentanone	10	U
591-78-6	2-Hexanone	10	U
127-18-4	Tetrachloroethene	10	U
79-34-5	1,1,2,2-Tetrachloroethane	10	U
108-88-3	Toluene	10	U
108-90-7	Chlorobenzene	10	U
100-41-4	Ethylbenzene	10	U
100-42-5	Styrene	10	U

1A-2
VOLATILE ORGANICS ANALYSIS DATA SHEET

EPA SAMPLE NO.

95-5396

Lab Name: TCT-ST. LOUIS

Contract: 6610-95-170

Lab Code: TCT

Case No.:

SAS No.:

SDG No.: 955396

Matrix: (soil/water) WATER

Lab Sample ID: 95003032

Sample wt/vol: 5 (g/ml) ML

Lab File ID: >E8666

Level: (low/med) LOW

Date Received: 06/20/95

% Moisture: not dec.

Date Analyzed: 06/22/95

GC Column: DB624 ID: 0.53 (mm)

Dilution Factor: 1

Soil Extract Volume: (uL)

Soil Aliquot Volume: (uL)

CAS NO.

COMPOUND

(ug/L or ug/Kg) ug/L

Q

1330-20-7

Xylene (total)

10

U

1E
VOLATILE ORGANICS ANALYSIS DATA SHEET
TENTATIVELY IDENTIFIED COMPOUNDS

EPA SAMPLE NO.

95-5396

Lab Name: TCT-ST.LOUIS

Contract: 6610-95-170

Lab Code: TCT

Case No.:

SAS No.:

SDG No.: 955396

Matrix: (soil/water) WATER

Lab Sample ID: 95003032

Sample wt/vol: 5 (g/ml) ML

Lab File ID: >E8666

Level: (low/med) LOW

Date Received: 06/20/95

% Moisture: not dec.

Date Analyzed: 06/22/95

GC Column: DB624 ID: 0.53 (mm)

Dilution Factor: 1

Soil Extract Volume: (uL)

Soil Aliquot Volume: (uL)

Number TICs found: 1

CONCENTRATION UNITS:
(ug/L or ug/Kg) ug/L

CAS NUMBER	COMPOUND NAME	RT	EST. CONC.	Q
1. 115071	1-Propene	1.41	6	JBN
2.				
3.				
4.				
5.				
6.				
7.				
8.				
9.				
10.				
11.				
12.				
13.				
14.				
15.				
16.				
17.				
18.				
19.				
20.				
21.				
22.				
23.				
24.				
25.				
26.				
27.				
28.				
29.				
30.				

1A
VOLATILE ORGANICS ANALYSIS DATA SHEET

EPA SAMPLE NO.

95-5399

Lab Name: TCT-ST. LOUIS

Contract: 6610-95-170

Lab Code: TCT

Case No.:

SAS No.:

SDG No.: 955396

Matrix: (soil/water) WATER

Lab Sample ID: 95003033

Sample wt/vol: 5 (g/ml) ML

Lab File ID: >E8667

Level: (low/med) LOW

Date Received: 06/20/95

% Moisture: not dec.

Date Analyzed: 06/22/95

GC Column: DB624 ID: 0.53 (mm)

Dilution Factor: 1

Soil Extract Volume: (uL)

Soil Aliquot Volume: (uL)

CAS NO.	COMPOUND	(ug/L or ug/Kg)	ug/L	Q
74-87-3	Chloromethane	10	U	
74-83-9	Bromomethane	10	U	
75-01-4	Vinyl chloride	10	U	
75-00-3	Chloroethane	10	U	
75-09-2	Methylene Chloride	10	U	
67-64-1	Acetone	10	U	
75-15-0	Carbon Disulfide	10	U	
75-35-4	1,1-Dichloroethene	10	U	
75-34-3	1,1-Dichloroethane	10	U	
156-59-2	cis-1,2-Dichloroethene	10	U	
156-60-5	trans-1,2-Dichloroethene	10	U	
67-66-3	Chloroform	10	U	
107-06-2	1,2-Dichloroethane	10	U	
78-93-3	2-Butanone	10	U	
71-55-6	1,1,1-Trichloroethane	10	U	
56-23-5	Carbon Tetrachloride	10	U	
108-05-4	Vinyl Acetate	10	U	
75-27-4	Bromodichloromethane	10	U	
78-87-5	1,2-Dichloropropane	10	U	
10061-01-5	cis-1,3-Dichloropropene	10	U	
79-01-6	Trichloroethene	10	U	
124-48-1	Dibromochloromethane	10	U	
79-00-5	1,1,2-Trichloroethane	10	U	
71-43-2	Benzene	10	U	
10061-02-6	trans-1,3-Dichloropropene	10	U	
75-25-2	Bromoform	10	U	
108-10-1	4-Methyl-2-pentanone	10	U	
591-78-6	2-Hexanone	10	U	
127-18-4	Tetrachloroethene	10	U	
79-34-5	1,1,2,2-Tetrachloroethane	10	U	
108-88-3	Toluene	10	U	
108-90-7	Chlorobenzene	10	U	
100-41-4	Ethylbenzene	10	U	
100-42-5	Styrene	10	U	

EPA SAMPLE NO.

95-5399

Contract: 6610-95-170

Case No. :

SAS No.:

SDG No.: 955396

Lab Sample ID: 95003033

Lab File ID: >E8667

Date Received: 06/20/95

Date Analyzed: 06/22/95

Dilution Factor: 1

Soil Aliquot Volume: (uL)

COMPOUND

(ug/L or ug/Kg) ug/L

Ω

Xylene (total)

10

U

1E
VOLATILE ORGANICS ANALYSIS DATA SHEET
TENTATIVELY IDENTIFIED COMPOUNDS

EPA SAMPLE NO.

95-5399

Lab Name: TCT-ST.LOUIS

Contract: 6610-95-170

Lab Code: TCT

Case No.:

SAS No.:

SDG No.: 955396

Matrix: (soil/water) WATER

Lab Sample ID: 95003033

Sample wt/vol: 5 (g/ml) ML

Lab File ID: >E8667

Level: (low/med) LOW

Date Received: 06/20/95

% Moisture: not dec.

Date Analyzed: 06/22/95

GC Column: DB624 ID: 0.53 (mm)

Dilution Factor: 1

Soil Extract Volume: (uL)

Soil Aliquot Volume: (uL)

Number TICs found: 1

CONCENTRATION UNITS:
(ug/L or ug/Kg) ug/L

CAS NUMBER	COMPOUND NAME	RT	EST. CONC.	Q
1. 115071	1-Propene	1.41	5	JBN
2.				
3.				
4.				
5.				
6.				
7.				
8.				
9.				
10.				
11.				
12.				
13.				
14.				
15.				
16.				
17.				
18.				
19.				
20.				
21.				
22.				
23.				
24.				
25.				
26.				
27.				
28.				
29.				
30.				

1A
VOLATILE ORGANICS ANALYSIS DATA SHEET

EPA SAMPLE NO.

95-5480

Lab Name: TCT-ST. LOUIS

Contract: 6610-95-170

Lab Code: TCT

Case No.:

SAS No.:

SDG No.: 955480

Matrix: (soil/water) SOIL

Lab Sample ID: 95003034

Sample wt/vol: 5 (g/ml) G

Lab File ID: >G3587

Level: (low/med) LOW

Date Received: 06/20/95

% Moisture: not dec. 8

Date Analyzed: 06/21/95

GC Column: DB624 ID: 0.53 (mm)

Dilution Factor: 1

Soil Extract Volume: (uL)

Soil Aliquot Volume: (uL)

CAS NO.	COMPOUND	(ug/L or ug/Kg)	ug/Kg	Q
74-87-3	Chloromethane	11		U
74-83-9	Bromomethane	11		U
75-01-4	Vinyl chloride	11		U
75-00-3	Chloroethane	11		U
75-09-2	Methylene Chloride	11		U
67-64-1	Acetone	11		U
75-15-0	Carbon Disulfide	11		U
75-35-4	1,1-Dichloroethene	11		U
75-34-3	1,1-Dichloroethane	11		U
156-59-2	cis-1,2-Dichloroethene	11		U
156-60-5	trans-1,2-Dichloroethene	11		U
67-66-3	Chloroform	11		U
107-06-2	1,2-Dichloroethane	11		U
78-93-3	2-Butanone	11		U
71-55-6	1,1,1-Trichloroethane	11		U
56-23-5	Carbon Tetrachloride	11		U
108-05-4	Vinyl Acetate	11		U
75-27-4	Bromodichloromethane	11		U
78-87-5	1,2-Dichloropropane	11		U
10061-01-5	cis-1,3-Dichloropropene	11		U
79-01-6	Trichloroethene	11		U
124-48-1	Dibromochloromethane	11		U
79-00-5	1,1,2-Trichloroethane	11		U
71-43-2	Benzene	11		U
10061-02-6	trans-1,3-Dichloropropene	11		U
75-25-2	Bromoform	11		U
108-10-1	4-Methyl-2-pentanone	11		U
591-78-6	2-Hexanone	11		U
127-18-4	Tetrachloroethene	11		U
79-34-5	1,1,2,2-Tetrachloroethane	11		U
108-88-3	Toluene	11		U
108-90-7	Chlorobenzene	11		U
100-41-4	Ethylbenzene	11		U
100-42-5	Styrene	11		U

EPA SAMPLE NO.

95-5480

Contract: 6610-95-170

SDG No.: 955480

Lab Sample ID: 95003034

Lab File ID: >G3587

Date Received: 06/20/95

Date Analyzed: 06/21/95

Dilution Factor: 1

Soil Aliquot Volume: (uL)

Q

Xylene (total)

11

U

1A
VOLATILE ORGANICS ANALYSIS DATA SHEET

EPA SAMPLE NO.

95-5481

Lab Name: TCT-ST. LOUIS

Contract: 6610-95-170

Lab Code: TCT

Case No.:

SAS No.:

SDG No.: 955480

Matrix: (soil/water) SOIL

Lab Sample ID: 95003035

Sample wt/vol: 5 (g/ml) G

Lab File ID: >G3588

Level: (low/med) LOW

Date Received: 06/20/95

% Moisture: not dec. 21

Date Analyzed: 06/21/95

GC Column: DB624 ID: 0.53 (mm)

Dilution Factor: 1

Soil Extract Volume: (uL)

Soil Aliquot Volume: (uL)

CAS NO.	COMPOUND	(ug/L or ug/Kg)	ug/Kg	Q
74-87-3	Chloromethane	13		U
74-83-9	Bromomethane	13		U
75-01-4	Vinyl chloride	13		U
75-00-3	Chloroethane	13		U
75-09-2	Methylene Chloride	13		U
67-64-1	Acetone	7		J
75-15-0	Carbon Disulfide	13		U
75-35-4	1,1-Dichloroethene	13		U
75-34-3	1,1-Dichloroethane	13		U
156-59-2	cis-1,2-Dichloroethene	13		U
156-60-5	trans-1,2-Dichloroethene	13		U
67-66-3	Chloroform	13		U
107-06-2	1,2-Dichloroethane	13		U
78-93-3	2-Butanone	13		U
71-55-6	1,1,1-Trichloroethane	13		U
56-23-5	Carbon Tetrachloride	13		U
108-05-4	Vinyl Acetate	13		U
75-27-4	Bromodichloromethane	13		U
78-87-5	1,2-Dichloropropane	13		U
10061-01-5	cis-1,3-Dichloropropene	13		U
79-01-6	Trichloroethene	13		U
124-48-1	Dibromochloromethane	13		U
79-00-5	1,1,2-Trichloroethane	13		U
71-43-2	Benzene	13		U
10061-02-6	trans-1,3-Dichloropropene	13		U
75-25-2	Bromoform	13		U
108-10-1	4-Methyl-2-pentanone	13		U
591-78-6	2-Hexanone	13		U
127-18-4	Tetrachloroethene	13		U
79-34-5	1,1,2,2-Tetrachloroethane	13		U
108-88-3	Toluene	13		U
108-90-7	Chlorobenzene	13		U
100-41-4	Ethylbenzene	13		U
100-42-5	Styrene	13		U

1A-2

95-5481

Contract: 6610-95-170

SDG No.: 955480

Lab Sample ID: 95003035

Lab File ID: >G3588

Date Received: 06/20/95

Date Analyzed: 06/21/95

Dilution Factor: 1

Soil Aliquot Volume: (uL)

Q

13

| U

1A
VOLATILE ORGANICS ANALYSIS DATA SHEET

EPA SAMPLE NO.

95-5482

Lab Name: TCT-ST. LOUIS

Contract: 6610-95-170

Lab Code: TCT

Case No.:

SAS No.:

SDG No.: 955480

Matrix: (soil/water) SOIL

Lab Sample ID: 95003036

Sample wt/vol: 5 (g/ml) G

Lab File ID: >G3589

Level: (low/med) LOW

Date Received: 06/20/95

% Moisture: not dec. 6

Date Analyzed: 06/21/95

GC Column: DB624 ID: 0.53 (mm)

Dilution Factor: 1

Soil Extract Volume: (uL)

Soil Aliquot Volume: (uL)

CAS NO.	COMPOUND	(ug/L or ug/Kg)	ug/Kg	Q
74-87-3	Chloromethane	11		U
74-83-9	Bromomethane	11		U
75-01-4	Vinyl chloride	11		U
75-00-3	Chloroethane	11		U
75-09-2	Methylene Chloride	11		U
67-64-1	Acetone	63		
75-15-0	Carbon Disulfide	11		U
75-35-4	1,1-Dichloroethene	11		U
75-34-3	1,1-Dichloroethane	11		U
156-59-2	cis-1,2-Dichloroethene	11		U
156-60-5	trans-1,2-Dichloroethene	11		U
67-66-3	Chloroform	11		U
107-06-2	1,2-Dichloroethane	11		U
78-93-3	2-Butanone	10		J
71-55-6	1,1,1-Trichloroethane	11		U
56-23-5	Carbon Tetrachloride	11		U
108-05-4	Vinyl Acetate	11		U
75-27-4	Bromodichloromethane	11		U
78-87-5	1,2-Dichloropropane	11		U
10061-01-5	cis-1,3-Dichloropropene	11		U
79-01-6	Trichloroethene	11		U
124-48-1	Dibromochloromethane	11		U
79-00-5	1,1,2-Trichloroethane	11		U
71-43-2	Benzene	11		U
10061-02-6	trans-1,3-Dichloropropene	11		U
75-25-2	Bromoform	11		U
108-10-1	4-Methyl-2-pentanone	11		U
591-78-6	2-Hexanone	11		U
127-18-4	Tetrachloroethene	11		U
79-34-5	1,1,2,2-Tetrachloroethane	11		U
108-88-3	Toluene	11		U
108-90-7	Chlorobenzene	11		U
100-41-4	Ethylbenzene	11		U
100-42-5	Styrene	11		U

1A-2
VOLATILE ORGANICS ANALYSIS DATA SHEET

EPA SAMPLE NO.

95-5482

Lab Name: TCT-ST. LOUIS

Contract: 6610-95-170

Lab Code: TCT

Case No.:

SAS No.:

SDG No.: 955480

Matrix: (soil/water) SOIL

Lab Sample ID: 95003036

Sample wt/vol: 5 (g/ml) G

Lab File ID: >G3589

Level: (low/med) LOW

Date Received: 06/20/95

% Moisture: not dec. 6

Date Analyzed: 06/21/95

GC Column: DB624 ID: 0.53 (mm)

Dilution Factor: 1

Soil Extract Volume: (uL)

Soil Aliquot Volume: (uL)

CAS NO.	COMPOUND	(ug/L or ug/Kg)	ug/Kg	Q
---------	----------	-----------------	-------	---

1330-20-7	Xylene (total)	11	U
-----------	----------------	----	---

1A
VOLATILE ORGANICS ANALYSIS DATA SHEET

EPA SAMPLE NO.

95-5483

Lab Name: TCT-ST. LOUIS

Contract: 6610-95-170

Lab Code: TCT

Case No.:

SAS No.:

SDG No.: 955480

Matrix: (soil/water) SOIL

Lab Sample ID: 95003037

Sample wt/vol: 5 (g/ml) G

Lab File ID: >G3590

Level: (low/med) LOW

Date Received: 06/20/95

% Moisture: not dec. 16

Date Analyzed: 06/21/95

GC Column: DB624 ID: 0.53 (mm)

Dilution Factor: 1

Soil Extract Volume: (uL)

Soil Aliquot Volume: (uL)

CAS NO.	COMPOUND	(ug/L or ug/Kg)	ug/Kg	Q
74-87-3	Chloromethane	12		U
74-83-9	Bromomethane	12		U
75-01-4	Vinyl chloride	12		U
75-00-3	Chloroethane	12		U
75-09-2	Methylene Chloride	2		J
67-64-1	Acetone	6		J
75-15-0	Carbon Disulfide	12		U
75-35-4	1,1-Dichloroethene	12		U
75-34-3	1,1-Dichloroethane	12		U
156-59-2	cis-1,2-Dichloroethene	12		U
156-60-5	trans-1,2-Dichloroethene	12		U
67-66-3	Chloroform	12		U
107-06-2	1,2-Dichloroethane	12		U
78-93-3	2-Butanone	12		U
71-55-6	1,1,1-Trichloroethane	12		U
56-23-5	Carbon Tetrachloride	12		U
108-05-4	Vinyl Acetate	12		U
75-27-4	Bromodichloromethane	12		U
78-87-5	1,2-Dichloropropane	12		U
10061-01-5	cis-1,3-Dichloropropene	12		U
79-01-6	Trichloroethene	12		U
124-48-1	Dibromochloromethane	12		U
79-00-5	1,1,2-Trichloroethane	12		U
71-43-2	Benzene	12		U
10061-02-6	trans-1,3-Dichloropropene	12		U
75-25-2	Bromoform	12		U
108-10-1	4-Methyl-2-pentanone	12		U
591-78-6	2-Hexanone	12		U
127-18-4	Tetrachloroethene	12		U
79-34-5	1,1,2,2-Tetrachloroethane	12		U
108-88-3	Toluene	12		U
108-90-7	Chlorobenzene	12		U
100-41-4	Ethylbenzene	12		U
100-42-5	Styrene	12		U

1A-2
VOLATILE ORGANICS ANALYSIS DATA SHEET

EPA SAMPLE NO.

95-5483

Lab Name: TCT-ST. LOUIS

Contract: 6610-95-170

Lab Code: TCT

Case No.:

SAS No.:

SDG No.: 955480

Matrix: (soil/water) SOIL

Lab Sample ID: 95003037

Sample wt/vol: 5 (g/ml) G

Lab File ID: >G3590

Level: (low/med) LOW

Date Received: 06/20/95

% Moisture: not dec. 16

Date Analyzed: 06/21/95

GC Column: DB624 ID: 0.53 (mm)

Dilution Factor: 1

Soil Extract Volume: (uL)

Soil Aliquot Volume: (uL)

CAS NO.

COMPOUND

(ug/L or ug/Kg) ug/Kg

Q

1330-20-7

Xylene (total)

12

U

1A
VOLATILE ORGANICS ANALYSIS DATA SHEET

EPA SAMPLE NO.

95-5484

Lab Name: TCT-ST. LOUIS

Contract: 6610-95-170

Lab Code: TCT

Case No.:

SAS No.:

SDG No.: 955480

Matrix: (soil/water) SOIL

Lab Sample ID: 95003038

Sample wt/vol: 5 (g/ml) G

Lab File ID: >G3600

Level: (low/med) LOW

Date Received: 06/20/95

% Moisture: not dec. 6

Date Analyzed: 06/21/95

GC Column: DB624 ID: 0.53 (mm)

Dilution Factor: 1

Soil Extract Volume: (uL)

Soil Aliquot Volume: (uL)

CAS NO.	COMPOUND	(ug/L or ug/Kg)	ug/Kg	Q
74-87-3	Chloromethane	11		U
74-83-9	Bromomethane	11		U
75-01-4	Vinyl chloride	11		U
75-00-3	Chloroethane	11		U
75-09-2	Methylene Chloride	11		U
67-64-1	Acetone	11		J
75-15-0	Carbon Disulfide	11		U
75-35-4	1,1-Dichloroethene	11		U
75-34-3	1,1-Dichloroethane	11		U
156-59-2	cis-1,2-Dichloroethene	11		U
156-60-5	trans-1,2-Dichloroethene	11		U
67-66-3	Chloroform	11		U
107-06-2	1,2-Dichloroethane	11		U
78-93-3	2-Butanone	1		J
71-55-6	1,1,1-Trichloroethane	11		U
56-23-5	Carbon Tetrachloride	11		U
108-05-4	Vinyl Acetate	11		U
75-27-4	Bromodichloromethane	11		U
78-87-5	1,2-Dichloropropane	11		U
10061-01-5	cis-1,3-Dichloropropene	11		U
79-01-6	Trichloroethene	11		U
124-48-1	Dibromochloromethane	11		U
79-00-5	1,1,2-Trichloroethane	11		U
71-43-2	Benzene	11		U
10061-02-6	trans-1,3-Dichloropropene	11		U
75-25-2	Bromoform	11		U
108-10-1	4-Methyl-2-pentanone	11		U
591-78-6	2-Hexanone	11		U
127-18-4	Tetrachloroethene	11		U
79-34-5	1,1,2,2-Tetrachloroethane	11		U
108-88-3	Toluene	11		U
108-90-7	Chlorobenzene	11		U
100-41-4	Ethylbenzene	11		U
100-42-5	Styrene	11		U

1A-2
VOLATILE ORGANICS ANALYSIS DATA SHEET

EPA SAMPLE NO.

95-5484

Lab Name: TCT-ST. LOUIS

Contract: 6610-95-170

Lab Code: TCT

Case No.:

SAS No.:

SDG No.: 955480

Matrix: (soil/water) SOIL

Lab Sample ID: 95003038

Sample wt/vol: 5 (g/ml) G

Lab File ID: >G3600

Level: (low/med) LOW

Date Received: 06/20/95

% Moisture: not dec. 6

Date Analyzed: 06/21/95

GC Column: DB624 ID: 0.53 (mm)

Dilution Factor: 1

Soil Extract Volume: (uL)

Soil Aliquot Volume: (uL)

CAS NO.	COMPOUND	(ug/L or ug/Kg)	ug/Kg	Q
---------	----------	-----------------	-------	---

1330-20-7	Xylene (total)	11	U
-----------	----------------	----	---

1A
VOLATILE ORGANICS ANALYSIS DATA SHEET

EPA SAMPLE NO.

95-5485

Lab Name: TCT-ST. LOUIS

Contract: 6610-95-170

Lab Code: TCT

Case No.:

SAS No.:

SDG No.: 955480

Matrix: (soil/water) SOIL

Lab Sample ID: 95003039

Sample wt/vol: 5 (g/ml) G

Lab File ID: >G3592

Level: (low/med) LOW

Date Received: 06/20/95

% Moisture: not dec. 18

Date Analyzed: 06/21/95

GC Column: DB624 ID: 0.53 (mm)

Dilution Factor: 1

Soil Extract Volume: (uL)

Soil Aliquot Volume: (uL)

CAS NO.	COMPOUND	(ug/L or ug/Kg)	ug/Kg	Q
74-87-3	Chloromethane	12		U
74-83-9	Bromomethane	12		U
75-01-4	Vinyl chloride	12		U
75-00-3	Chloroethane	12		U
75-09-2	Methylene Chloride	12		U
67-64-1	Acetone	15		
75-15-0	Carbon Disulfide	12		U
75-35-4	1,1-Dichloroethene	12		U
75-34-3	1,1-Dichloroethane	12		U
156-59-2	cis-1,2-Dichloroethene	12		U
156-60-5	trans-1,2-Dichloroethene	12		U
67-66-3	Chloroform	12		U
107-06-2	1,2-Dichloroethane	12		U
78-93-3	2-Butanone	12		U
71-55-6	1,1,1-Trichloroethane	12		U
56-23-5	Carbon Tetrachloride	12		U
108-05-4	Vinyl Acetate	12		U
75-27-4	Bromodichloromethane	12		U
78-87-5	1,2-Dichloropropane	12		U
10061-01-5	cis-1,3-Dichloropropene	12		U
79-01-6	Trichloroethene	12		U
124-48-1	Dibromochloromethane	12		U
79-00-5	1,1,2-Trichloroethane	12		U
71-43-2	Benzene	12		U
10061-02-6	trans-1,3-Dichloropropene	12		U
75-25-2	Bromoform	12		U
108-10-1	4-Methyl-2-pentanone	12		U
591-78-6	2-Hexanone	12		U
127-18-4	Tetrachloroethene	12		U
79-34-5	1,1,2,2-Tetrachloroethane	12		U
108-88-3	Toluene	12		U
108-90-7	Chlorobenzene	12		U
100-41-4	Ethylbenzene	12		U
100-42-5	Styrene	12		U

1A-2
VOLATILE ORGANICS ANALYSIS DATA SHEET

EPA SAMPLE NO.

95-5485

Lab Name: TCT-ST. LOUIS

Contract: 6610-95-170

Lab Code: TCT

Case No.:

SAS No.:

SDG No.: 955480

Matrix: (soil/water) SOIL

Lab Sample ID: 95003039

Sample wt/vol: 5 (g/ml) G

Lab File ID: >G3592

Level: (low/med) LOW

Date Received: 06/20/95

% Moisture: not dec. 18

Date Analyzed: 06/21/95

GC Column: DB624 ID: 0.53 (mm)

Dilution Factor: 1

Soil Extract Volume: (uL)

Soil Aliquot Volume: (uL)

CAS NO.	COMPOUND	(ug/L or ug/Kg)	ug/Kg	Q
1330-20-7	Xylene (total)	12		U

1A
VOLATILE ORGANICS ANALYSIS DATA SHEET

EPA SAMPLE NO.

95-5486

Lab Name: TCT-ST. LOUIS

Contract: 6610-95-170

Lab Code: TCT

Case No.:

SAS No.:

SDG No.: 955480

Matrix: (soil/water) SOIL

Lab Sample ID: 95003040

Sample wt/vol: 5 (g/ml) G

Lab File ID: >G3595

Level: (low/med) LOW

Date Received: 06/20/95

% Moisture: not dec. 23

Date Analyzed: 06/21/95

GC Column: DB624 ID: 0.53 (mm)

Dilution Factor: 1

Soil Extract Volume: (uL)

Soil Aliquot Volume: (uL)

CAS NO.	COMPOUND	(ug/L or ug/Kg)	ug/Kg	Q
74-87-3	Chloromethane	13		U
74-83-9	Bromomethane	13		U
75-01-4	Vinyl chloride	13		U
75-00-3	Chloroethane	13		U
75-09-2	Methylene Chloride	13		U
67-64-1	Acetone	9		J
75-15-0	Carbon Disulfide	13		U
75-35-4	1,1-Dichloroethene	13		U
75-34-3	1,1-Dichloroethane	13		U
156-59-2	cis-1,2-Dichloroethene	13		U
156-60-5	trans-1,2-Dichloroethene	13		U
67-66-3	Chloroform	13		U
107-06-2	1,2-Dichloroethane	13		U
78-93-3	2-Butanone	13		U
71-55-6	1,1,1-Trichloroethane	13		U
56-23-5	Carbon Tetrachloride	13		U
108-05-4	Vinyl Acetate	13		U
75-27-4	Bromodichloromethane	13		U
78-87-5	1,2-Dichloropropane	13		U
10061-01-5	cis-1,3-Dichloropropene	13		U
79-01-6	Trichloroethene	13		U
124-48-1	Dibromochloromethane	13		U
79-00-5	1,1,2-Trichloroethane	13		U
71-43-2	Benzene	13		U
10061-02-6	trans-1,3-Dichloropropene	13		U
75-25-2	Bromoform	13		U
108-10-1	4-Methyl-2-pentanone	13		U
591-78-6	2-Hexanone	13		U
127-18-4	Tetrachloroethene	13		U
79-34-5	1,1,2,2-Tetrachloroethane	13		U
108-88-3	Toluene	13		U
108-90-7	Chlorobenzene	13		U
100-41-4	Ethylbenzene	13		U
100-42-5	Styrene	13		U

1A-2
VOLATILE ORGANICS ANALYSIS DATA SHEET

EPA SAMPLE NO.

95-5486

Lab Name: TCT-ST. LOUIS

Contract: 6610-95-170

Lab Code: TCT

Case No.:

SAS No.:

SDG No.: 955480

Matrix: (soil/water) SOIL

Lab Sample ID: 95003040

Sample wt/vol: 5 (g/ml) G

Lab File ID: >G3595

Level: (low/med) LOW

Date Received: 06/20/95

% Moisture: not dec. 23

Date Analyzed: 06/21/95

GC Column: DB624 ID: 0.53 (mm)

Dilution Factor: 1

Soil Extract Volume: (uL)

Soil Aliquot Volume: (uL)

CAS NO.

COMPOUND

(ug/L or ug/Kg) ug/Kg

Q

1330-20-7	Xylene (total)	4	J
-----------	----------------	---	---

1A
VOLATILE ORGANICS ANALYSIS DATA SHEET

EPA SAMPLE NO.

95-5487

Lab Name: TCT-ST. LOUIS

Contract: 6610-95-170

Lab Code: TCT

Case No.:

SAS No.:

SDG No.: 955480

Matrix: (soil/water) SOIL

Lab Sample ID: 95003041

Sample wt/vol: 5 (g/ml) G

Lab File ID: >G3596

Level: (low/med) LOW

Date Received: 06/20/95

% Moisture: not dec. 21

Date Analyzed: 06/21/95

GC Column: DB624 ID: 0.53 (mm)

Dilution Factor: 1

Soil Extract Volume: (uL)

Soil Aliquot Volume: (uL)

CAS NO.	COMPOUND	(ug/L or ug/Kg)	ug/Kg	Q
74-87-3	Chloromethane	13	U	
74-83-9	Bromomethane	13	U	
75-01-4	Vinyl chloride	13	U	
75-00-3	Chloroethane	13	U	
75-09-2	Methylene Chloride	2	J	
67-64-1	Acetone	13	U	
75-15-0	Carbon Disulfide	13	U	
75-35-4	1,1-Dichloroethene	13	U	
75-34-3	1,1-Dichloroethane	13	U	
156-59-2	cis-1,2-Dichloroethene	13	U	
156-60-5	trans-1,2-Dichloroethene	13	U	
67-66-3	Chloroform	13	U	
107-06-2	1,2-Dichloroethane	13	U	
78-93-3	2-Butanone	13	U	
71-55-6	1,1,1-Trichloroethane	13	U	
56-23-5	Carbon Tetrachloride	13	U	
108-05-4	Vinyl Acetate	13	U	
75-27-4	Bromodichloromethane	13	U	
78-87-5	1,2-Dichloropropane	13	U	
10061-01-5	cis-1,3-Dichloropropene	13	U	
79-01-6	Trichloroethene	13	U	
124-48-1	Dibromochloromethane	13	U	
79-00-5	1,1,2-Trichloroethane	13	U	
71-43-2	Benzene	13	U	
10061-02-6	trans-1,3-Dichloropropene	13	U	
75-25-2	Bromoform	13	U	
108-10-1	4-Methyl-2-pentanone	13	U	
591-78-6	2-Hexanone	13	U	
127-18-4	Tetrachloroethene	13	U	
79-34-5	1,1,2,2-Tetrachloroethane	13	U	
108-88-3	Toluene	13	U	
108-90-7	Chlorobenzene	13	U	
100-41-4	Ethylbenzene	13	U	
100-42-5	Styrene	13	U	

EPA SAMPLE NO.

95-5487

Contract: 6610-95-170

SDG No.: 955480

Lab Sample ID: 95003041

Lab File ID: >G3596

Date Received: 06/20/95

Date Analyzed: 06/21/95

Dilution Factor: 1

Soil Aliquot Volume: (uL)

Q

FORM I VOA-2

3/90 Rev

1A
VOLATILE ORGANICS ANALYSIS DATA SHEET

EPA SAMPLE NO.

95-5488

Lab Name: TCT-ST. LOUIS

Contract: 6610-95-170

Lab Code: TCT

Case No.:

SAS No.:

SDG No.: 955480

Matrix: (soil/water) SOIL

Lab Sample ID: 95003042

Sample wt/vol: 5 (g/ml) G

Lab File ID: >G3597

Level: (low/med) LOW

Date Received: 06/20/95

% Moisture: not dec. 22

Date Analyzed: 06/21/95

GC Column: DB624 ID: 0.53 (mm)

Dilution Factor: 1

Soil Extract Volume: (uL)

Soil Aliquot Volume: (uL)

CAS NO.	COMPOUND	(ug/L or ug/Kg)	ug/Kg	Q
---------	----------	-----------------	-------	---

74-87-3	Chloromethane	13	U	
74-83-9	Bromomethane	13	U	
75-01-4	Vinyl chloride	13	U	
75-00-3	Chloroethane	13	U	
75-09-2	Methylene Chloride	13	U	
67-64-1	Acetone	120		
75-15-0	Carbon Disulfide	13	U	
75-35-4	1,1-Dichloroethene	13	U	
75-34-3	1,1-Dichloroethane	13	U	
156-59-2	cis-1,2-Dichloroethene	13	U	
156-60-5	trans-1,2-Dichloroethene	13	U	
67-66-3	Chloroform	13	U	
107-06-2	1,2-Dichloroethane	13	U	
78-93-3	2-Butanone	18		
71-55-6	1,1,1-Trichloroethane	13	U	
56-23-5	Carbon Tetrachloride	13	U	
108-05-4	Vinyl Acetate	13	U	
75-27-4	Bromodichloromethane	13	U	
78-87-5	1,2-Dichloropropane	13	U	
10061-01-5	cis-1,3-Dichloropropene	13	U	
79-01-6	Trichloroethene	13	U	
124-48-1	Dibromochloromethane	13	U	
79-00-5	1,1,2-Trichloroethane	13	U	
71-43-2	Benzene	13	U	
10061-02-6	trans-1,3-Dichloropropene	13	U	
75-25-2	Bromoform	13	U	
108-10-1	4-Methyl-2-pentanone	13	U	
591-78-6	2-Hexanone	13	U	
127-18-4	Tetrachloroethene	13	U	
79-34-5	1,1,2,2-Tetrachloroethane	13	U	
108-88-3	Toluene	2	J	
108-90-7	Chlorobenzene	13	U	
100-41-4	Ethylbenzene	13	U	
100-42-5	Styrene	13	U	

EPA SAMPLE NO.

95-5488

Contract: 6610-95-170

SDG No.: 955480

Lab Sample ID: 95003042

Lab File ID: >G3597

Date Received: 06/20/95

Date Analyzed: 06/21/95

Dilution Factor: 1

Soil Aliquot Volume: (uL)

Q

3/90 Rev

1E
VOLATILE ORGANICS ANALYSIS DATA SHEET
TENTATIVELY IDENTIFIED COMPOUNDS

EPA SAMPLE NO.

95-5488

Lab Name: TCT-ST.LOUIS

Contract: 6610-95-170

Lab Code: TCT

Case No.:

SAS No.:

SDG No.: 955480

Matrix: (soil/water) SOIL

Lab Sample ID: 95003042

Sample wt/vol: 5 (g/ml) G

Lab File ID: >G3597

Level: (low/med) LOW

Date Received: 06/20/95

% Moisture: not dec. 22

Date Analyzed: 06/21/95

GC Column: DB624 ID: 0.53 (mm)

Dilution Factor: 1

Soil Extract Volume: (uL)

Soil Aliquot Volume: (uL)

Number TICs found: 2

CONCENTRATION UNITS:
(ug/L or ug/Kg) ug/Kg

CAS NUMBER	COMPOUND NAME	RT	EST. CONC.	Q
1.	ETHYL-METHYL-BENZENE ISOMER	20.07	6	J
2.	Isomer of C9H12	21.09	11	J
3.				
4.				
5.				
6.				
7.				
8.				
9.				
10.				
11.				
12.				
13.				
14.				
15.				
16.				
17.				
18.				
19.				
20.				
21.				
22.				
23.				
24.				
25.				
26.				
27.				
28.				
29.				
30.				

APPENDIX F. CHAIN OF CUSTODY FORMS

THIS PAGE WAS INTENTIONALLY LEFT BLANK



Shipment No.

Date 8-30-95 Page of

Laboratory Name Huntsgton
 Address 601 48th St
Sioux Falls, SD
 Phone (605) 332-5371
 Contact Name Mich Kennenbush

OBSERVATIONS, COMMENTS,
SPECIAL INSTRUCTIONS

Trip Blank

Date 8/20/05	Total Number of Containers: 22
Instructions 1. Fill out form completely except for shaded areas (lab use only). 2. Complete in ballpoint pen. Draw one line through errors and initial. 3. Request analyses using EPA method numbers only. Consult the project QAPP for	22

<p>Instructions. Complete as shown.</p> <p>4. Reference all field QC samples to the applicable site or zone.</p> <p>5. Note all applicable preservatives.</p> <p>6. Group all sample containers and requested analyses from one sampling location together. Do not list individually.</p>	<p>Date</p> <p>Time</p>
---	-------------------------


Yellow: Project QAO **Goldenrod: Field Project Manager**

White: Laboratory **Pink: Project Manager**

White: Laboratory

100

Company



Shipment No.

Date 8-30-95 Page of

Page _____ of _____

Date 8-30-95

Yellow: Project QAO Goldenrod: Field Project Manager

Science Applications International Corporation

White: Laboratory **Pink: Project Manager**

Yellow: Project QAO



Science Applications
International Corporation
An Employee-Owned Company

Chain of Custody Record

Date 7-18-95 Page 2 of 2

Shipment No. 4

Name <u>Peter J. Ferron</u>				Laboratory Name <u>Huntingdon</u>			
Address <u>655 Metro Place S, Suite 745 Dublin OH 43017</u>				Address <u>601 48th St</u>			
Phone Number <u>(614) 793-7600</u>				Phone <u>(605) 332-5371</u>			
Project Manager <u>Pat Patel</u>				Contact Name <u>Mitch Kennenbury</u>			
Project Name <u>SDANG Joe Foss Field SI</u>				OBSERVATIONS, COMMENTS, SPECIAL INSTRUCTIONS			
Job/P.O. No. <u>01-0513-04-3423</u>				<u>Trip Blank</u>			
Supplier (Signature) <u>Peter J. Ferron</u> (Printed Name) <u>Peter J. Ferron</u>				<u>Water source</u>			
Laboratory No.	Matrix	Sample No.	Date	Time	Site/Zone	NO.	OF CONTAINERS
60150	Water	TB05	7/18/95	0950	---	2	
60151		FB03		0955	---	2	
60152		FB04		1000	---	2	
60153		MW1-13-01		1110	Area 13	2	
60154		MW2-13-1		1145	↓	2	
60155		FB05		1130	---	2	
60156		MW2-12-1		1300	Area 12	2	
60157		MW6-12-1		1330	---	2	
60158		MW3-12-01		1450	---	2	
60159		MW4-12-01		1600	---	2	
60160		MW5-12-01		1650	---	2	
60161		MW1-12-01		1410	↓	2	
		Cooler Blank			(4°C)	1	
Relinquished by <u>Peter J. Ferron</u> Signature <u>Peter J. Ferron</u> Printed Name <u>Peter J. Ferron</u> Company <u>SAIC</u>						Shipment Method: <u>Hand Delivery</u>	
Date <u>7/18/95</u> Time <u>0830</u>						SAIC Location (circle) Washington, D.C. 1710 Goodridge Dr., McLean, VA 22102 (703) 734-2500	
Date <u>7/19/95</u> Time <u>8:30</u>						Oak Ridge 800 Oak Ridge Trpk., Oak Ridge, TN 37830 (615) 482-9031	
Date <u>7/19/95</u> Time <u>0830</u>						Paramus One Sears Drive, Paramus, NJ 07652 (201) 598-0100	
Date <u>7/19/95</u> Time <u>0830</u>						Denver 1828 Cole Boulevard, Suite 270, Golden, CO 80401 (303) 731-8094	
Date <u>7/19/95</u> Time <u>0830</u>						Seattle 13400B Northup Way, S38, Bellevue, WA 98005 (206) 747-7899	
Date <u>7/19/95</u> Time <u>0830</u>						San Diego 4224 Campus Point, Building 3, San Diego, CA 92121 (619) 535-7438	
Instructions 1. Fill out form completely except for shaded areas (lab use only). 2. Complete in ballpoint pen. Draw one line through errors and initial. 3. Request analyses using EPA method numbers only. Consult the project QAPP for instructions. Complete as shown. 4. Reference all field QC samples to the applicable site or zone. 5. Note all applicable preservatives. 6. Group all sample containers and requested analyses from one sampling location together. Do not list individually.							

Chain of Custody Record

Date **7-18-95**

Page **1** of **8**

Shipment No.
4

Name <u>Peter J. Ferron</u> Address <u>655 Metro Place S, Suite 745 Dublin OH 43017</u> Phone Number <u>614 793-7600</u> Project Manager <u>Pat Patel</u> Project Name <u>SDANG Joe Fass Field SI</u> Job/P.O. No. <u>01-0513-04-3423</u>				Laboratory Name <u>Huntingdon</u> Address <u>601-484R St</u> City <u>Siox Falls SD</u> Phone <u>(605) 332-5371</u> Contact Name <u>Mitch Kennenburgh</u>			
Sample Signature <u>Peter J. Ferron</u> (Printed Name) Laboratory No. <u>6150</u> Matrix <u>Water Sample No. <u>TB05 Date <u>7/18/95 Time <u>0950 Site/Zone <u>—</u> </u></u></u></u>				OBSERVATIONS, COMMENTS, SPECIAL INSTRUCTIONS <u>Trip Blanks</u> <u>Water Source</u> <u>Water Source</u>			
Requested Parameters <u>BTEX</u> <u>8-Solvents</u>				NO. OF CONTAINERS <u>6</u> <u>6</u> <u>6</u> <u>6</u> <u>6</u> <u>6</u> <u>3</u> <u>3</u> <u>3</u> <u>3</u>			
Relinquished by <u>Peter J. Ferron</u> Signature <u>Peter J. Ferron</u> Printed Name <u>SAIC</u> Company <u>SAIC</u>				Shipment Method: <u>Hand Delivery</u> SAIC Location (circle) <u>Washington, D.C.</u> <u>1710 Goodridge Dr., McLean, VA 22102</u> <u>Oak Ridge</u> <u>800 Oak Ridge Trpk., Oak Ridge, TN 37830</u> <u>Paramus</u> <u>One Sears Drive, Paramus, NJ 07652</u> <u>Denver</u> <u>1626 Cole Boulevard, Suite 270, Golden, CO 80401</u> <u>Seattle</u> <u>13400B Northup Way, S38, Bellevue, WA 98005</u> <u>San Diego</u> <u>4224 Campus Point, Building 3, San Diego, CA 92121</u> <u>(619) 535-7438</u>			
Relinquished by <u>Peter J. Ferron</u> Signature <u>Peter J. Ferron</u> Printed Name <u>SAIC</u> Company <u>SAIC</u>				Total Number of Containers: <u>58</u> Instructions 1. Fill out form completely except for shaded areas (lab use only). 2. Complete in ballpoint pen. Draw one line through errors and initial. 3. Request analyses using EPA method numbers only. Consult the project QAPP for instructions. Complete as shown. 4. Reference all field QC samples to the applicable site or zone. 5. Note all applicable preservatives. 6. Group all sample containers and requested analyses from one sampling location together. Do not list individually.			
Received by <u>Peter J. Ferron</u> Signature <u>Peter J. Ferron</u> Printed Name <u>Peter J. Ferron</u> Company <u>SAIC</u>				Date <u>7/19/95 Time <u>8:30</u> </u>			
Received by <u>Peter J. Ferron</u> Signature <u>Peter J. Ferron</u> Printed Name <u>Peter J. Ferron</u> Company <u>SAIC</u>				Date <u>7/19/95 Time <u>8:30</u> </u>			
Received by <u>Peter J. Ferron</u> Signature <u>Peter J. Ferron</u> Printed Name <u>Peter J. Ferron</u> Company <u>SAIC</u>				Date <u>7/19/95 Time <u>8:30</u> </u>			

Chain of Custody Record



Shipment No.

Date 6-14-95

01

Appendix F
Page F-2

Chain of Custody Record

Page 1 of 2

Date 6-15-95



**Science Applications
International Corporation**
An Employee-Owned Company

Name: Peter J. Feron
Address: 655 Metro Place S, Suite 745 Dublin 01143017
Phone Number: (614) 7973-7600
Project Manager: Paul Patel
Project Name: SDANCO, Joe Fass Field 51
Job/P.O. No.: 01-0513-04-3473

Sampler (Signature) *Peter J. Foon* (Printed Name) Peter J. Foon

OBSERVATIONS, COMMENTS,
SPECIAL INSTRUCTIONSOBSERVATIONS, COMMENTS,
SPECIAL INSTRUCTIONS

Temperature Blank

Relinquished by <i>Peter J. Ferron</i>	Date <i>4/16/95</i>	Received by <i>[Signature]</i>	Date <i>4/16/95</i>	Total Number of Containers: <i>57</i>	Shipment Method: <i>Hand Delivery</i>
Signature <i>Peter J. Ferron</i>	Time <i>2:40</i>	Signature <i>[Signature]</i>	Time <i>[Blank]</i>	Instructions 1. Fill out form completely except for shaded areas (lab use only). 2. Complete in ballpoint pen. Draw one line through errors and initial.	SAIC Locallion (circle) Washington, D.C. 1710 Goodridge Dr., McLean, VA 22102 (703) 734-2500
Printed Name <i>SAIC</i>		Printed Name <i>[Blank]</i>		3. Request analyses using EPA method numbers only. Consult the project QAPP for instructions. Complete as shown.	<i>Oak Ridge</i> 800 Oak Ridge Trpk., Oak Ridge, TN 37830 (615) 482-9031
Company <i>[Blank]</i>		Company <i>[Blank]</i>		4. Reference all field QC samples to the applicable site or zone.	<i>Paramus</i> One Seaks Drive, Paramus, NJ 07652 (201) 599-0100
Relinquished by <i>[Blank]</i>	Date <i>[Blank]</i>	Received by <i>[Blank]</i>	Date <i>[Blank]</i>	5. Note all applicable preservatives.	<i>Denver</i> 1626 Cole Boulevard, Suite 270, Golden, CO 80401 (303) 231-9094
Signature <i>[Blank]</i>	Time <i>[Blank]</i>	Signature <i>[Blank]</i>	Time <i>[Blank]</i>	6. Group all sample containers and requested analyses from one sampling location together. Do not list individually.	<i>Seallie</i> 134008 Northup Way, S38, Bellevue, WA 98005 (206) 747-7899
Printed Name <i>[Blank]</i>		Printed Name <i>[Blank]</i>			<i>San Diego</i> 4224 Campus Point, Building 3, San Diego, CA 92121 (619) 535-7438
Company <i>[Blank]</i>		Company <i>[Blank]</i>			



Science Applications
International Corporation
An Employee-Owned Company

Chain of Custody Record

Date 6-15-95 Page 3 of 2

Shipment No. 63

Name <u>Peter J. Ferron</u>				Laboratory Name <u>Washington</u>			
Address <u>655 Metro Place S. Suite 745 DuBou 61113049</u>				Address <u>661 4216 St</u>			
Phone Number <u>(614)-793-7600</u>				Phone <u>(605) 338-5371</u>			
Project Manager <u>P. Patel</u>				Contact Name <u>Witch Kennenbury</u>			
Project Name <u>SDANIS Joe Foss Field SI</u>				OBSERVATIONS, COMMENTS, SPECIAL INSTRUCTIONS			
Job/P.O. No. <u>01-0513-04-3-123</u>							
Sampler (Signature) <u>Peter J. Ferron</u> (Printed Name) <u>Peter J. Ferron</u>							
Laboratory No.	Matrix	Sample No.	Date	Time	Site/Zone	NO. OF CONTAINERS	
	<u>Soil</u>	<u>GS13-2-4</u>	<u>6-15-95</u>	<u>1540</u>	<u>Area 13</u>	<u>5</u>	
		<u>GS13-3-1</u>		<u>1620</u>		<u>5</u>	
		<u>GS13-3-2</u>		<u>1640</u>		<u>5</u>	
		<u>GS13-3-3</u>		<u>1700</u>		<u>5</u>	
		<u>GS13-3-4</u>		<u>1720</u>		<u>5</u>	
		<u>GS13-4-1</u>		<u>1750</u>		<u>5</u>	
		<u>GS13-4-2</u>		<u>1800</u>		<u>5</u>	
		<u>GS13-4-3</u>		<u>1810</u>		<u>5</u>	
		<u>GS13-4-4</u>		<u>1820</u>		<u>5</u>	
		<u>GS13-4-5</u>		<u>1840</u>		<u>5</u>	
Relinquished by <u>Peter J. Ferron</u> Signature <u>Peter J. Ferron</u> Printed Name <u>SAIC</u> Company							Shipment Method: <u>Hand Delivery</u>
Received by <u>Valley View</u> Signature <u>Valley View</u> Printed Name <u>Valley View</u> Company							SAIC Location (circle) <u>Washington, D.C.</u> 1710 Goodridge Dr., McLean, VA 22102 (703) 734-2500 <u>Oak Ridge</u> 800 Oak Ridge Trpk., Oak Ridge, TN 37830 (615) 482-9031 <u>Paramus</u> One Sears Drive, Paramus, NJ 07652 (201) 599-0100 <u>Denver</u> 1628 Cole Boulevard, Suite 270, Golden, CO 80401 (303) 231-9094 <u>Seattle</u> 134008 Northup Way, S30, Bellevue, WA 98005 (206) 747-7899 <u>San Diego</u> 4224 Campus Point, Building 3, San Diego, CA 92121 (619) 535-7438
Relinquished by <u>SAIC</u> Signature <u>SAIC</u> Printed Name <u>SAIC</u> Company							Total Number of Containers: <u>50</u>
Received by <u>SAIC</u> Signature <u>SAIC</u> Printed Name <u>SAIC</u> Company							Instructions 1. Fill out form completely except for shaded areas (lab use only). 2. Complete in ballpoint pen. Draw one line through errors and initial. 3. Request analyses using EPA method numbers only. Consult the project QAPP for instructions. Complete as shown. 4. Reference all field QC samples to the applicable site or zone. 5. Note all applicable preservatives. 6. Group all sample containers and requested analyses from one sampling location together. Do not list individually.

Shipment No.
03

Chain of Custody Record

Date **6-16-95** Page **1** of **1**



Name Peter Jefferson Address 655 Metro Plaza, Suite 745, Dublin, CA 94568 Phone Number (415) 773-7600 Project Manager Peter Jefferson Project Name SDARS, Joe Foss Field SI Job/P.O. No. 01-0513-04-3423				Laboratory Name Huntington Address 601 E. 1st St., Suite N Phone (605) 332-5371 Contact Name Mike Kenworthy																																																				
Sampler (Signature) [Signature]				OBSERVATIONS, COMMENTS, SPECIAL INSTRUCTIONS Temperature Blank																																																				
Requested Parameters				NO. OF CONTAINERS																																																				
<table border="1"> <thead> <tr> <th>Matrix</th> <th>Sample No.</th> <th>Date</th> <th>Time</th> <th>Site/Zone</th> </tr> </thead> <tbody> <tr> <td>W.A.</td> <td>GW12-01</td> <td>6-16-95</td> <td>0730</td> <td>Ave 12</td> </tr> <tr> <td></td> <td>GW12-02</td> <td></td> <td>0955</td> <td></td> </tr> <tr> <td></td> <td>GW12-03</td> <td></td> <td>1045</td> <td></td> </tr> <tr> <td></td> <td>IB04</td> <td></td> <td>0900</td> <td></td> </tr> <tr> <td></td> <td>CB5</td> <td></td> <td>1135</td> <td></td> </tr> <tr> <td></td> <td>GW12-11</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>				Matrix	Sample No.	Date	Time	Site/Zone	W.A.	GW12-01	6-16-95	0730	Ave 12		GW12-02		0955			GW12-03		1045			IB04		0900			CB5		1135			GW12-11				<table border="1"> <thead> <tr> <th>Requested Parameters</th> <th>NO. OF CONTAINERS</th> </tr> </thead> <tbody> <tr> <td>BTEX</td> <td>5</td> </tr> <tr> <td>TH</td> <td>5</td> </tr> <tr> <td></td> <td>5</td> </tr> <tr> <td></td> <td>3</td> </tr> <tr> <td></td> <td>1</td> </tr> <tr> <td></td> <td>5</td> </tr> </tbody> </table>				Requested Parameters	NO. OF CONTAINERS	BTEX	5	TH	5		5		3		1		5
Matrix	Sample No.	Date	Time	Site/Zone																																																				
W.A.	GW12-01	6-16-95	0730	Ave 12																																																				
	GW12-02		0955																																																					
	GW12-03		1045																																																					
	IB04		0900																																																					
	CB5		1135																																																					
	GW12-11																																																							
Requested Parameters	NO. OF CONTAINERS																																																							
BTEX	5																																																							
TH	5																																																							
	5																																																							
	3																																																							
	1																																																							
	5																																																							
Relinquished by [Signature] SAIC Printed Name Company				Received by [Signature] Printed Name Company																																																				
Relinquished by [Signature] Printed Name Company				Received by [Signature] Printed Name Company																																																				
Date 6/16/95 Time 1430				Date 6/16/95 Time 1430																																																				
Instructions 1. Fill out form completely except for shaded areas (lab use only). 2. Complete in ballpoint pen. Draw one line through errors and initial. 3. Request analyses using EPA method numbers only. Consult the project OAPP for instructions. Complete as shown. 4. Reference all field QC samples to the applicable site or zone. 5. Note all applicable preservatives. 6. Group all sample containers and requested analyses from one sampling location together. Do not list individually.				Total Number of Containers: 24																																																				
SAIC Location (circle) Washington, D.C. 1710 Goodridge Dr., McLean, VA 22102 (703) 734-2500 Oak Ridge 800 Oak Ridge Trpk., Oak Ridge, TN 37830 (615) 482-9031 Paramus One Sears Drive, Paramus, NJ 07652 (201) 599-0100 Denver 1626 Cole Boulevard, Suite 270, Golden, CO 80401 (303) 231-9054 Seattle 13400B Northup Way, S30, Bellevue, WA 98005 (206) 747-7859 San Diego 4224 Campus Point, Building 3, San Diego, CA 92121 (619) 535-7438				Shipment Method: Hand Delivery																																																				



Science Applications
International Corporation
An Employee-Owned Company

Chain of Custody Record

Shipment No. 4

Date 7-13-95 Page 1 of 2

Name Peter J. Feron
Address 655 Metro Place S, Suite 745, Dublin, OH 43017
Phone Number 614 793-7600
Project Manager Pat Feron
Project Name EDAMS Fox Foss Field SI
Job/P.O. No. 01 0513-01-3423

Sampled (Signature) Peter J. Feron (Printed Name)
Laboratory No. SAIC

Laboratory No.	Matrix	Sample No.	Date	Time	Site/Zone
	Water	TR05	7/13/95	0950	
		FB03		0955	
		FB04		1000	
		MW1-13-01		1110	13
		MW3-13-01		1145	
		EB05		1130	
		MW2-12-01		1300	12
		MW6-12-01		1330	
		MW3-12-01		1450	
		MW4-12-01		1600	
		MW5-12-01		1650	
		MW1-12-01		1410	
		Water Blank			

Relinquished by <u>Peter J. Feron</u> Signature Printed Name SAIC Company	Date <u>7/13/95</u> Time <u>0830</u>	Received by <u>Peter J. Feron</u> Signature Printed Name SAIC Company	Date <u>7/13/95</u> Time <u>0830</u>
Relinquished by <u>Peter J. Feron</u> Signature Printed Name SAIC Company	Date <u>7/13/95</u> Time <u>0830</u>	Received by <u>Peter J. Feron</u> Signature Printed Name SAIC Company	Date <u>7/13/95</u> Time <u>0830</u>

Requested Parameters										NO. OF CONTAINERS
1	2	3	4	5	6	7	8	9	10	
9-5.1 vents	X	X	X	X	X	X	X	X	X	6
6TEX	X	X	X	X	X	X	X	X	X	6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
										6
					</					

Photo: Project Manager Yellow: District DAO Goldmine: Field District Manager

White: 14th Avenue	Plak: Product Manager	Yellow: Product OAO	Goldenrod: Field Product Manager
--------------------	-----------------------	---------------------	----------------------------------

**APPENDIX G. SI DATA REQUIREMENTS
FOR FEDERAL FACILITY DOCKET SITES**

THIS PAGE WAS INTENTIONALLY LEFT BLANK

SI DATA REQUIREMENTS FOR FEDERAL FACILITY DOCKET SITES

1. Supply copies of all sampling data, onsite and offsite, including location map, detection limits, raw data sheets, quality assurance/quality control (QA/QC) documents, date(s) sampled, analytical method(s) used, well or boring logs, and sampling technique(s).
2. Locate and identify on a map all known or suspected sources. Supply all information about source(s), such as: dates of operations, use, or spillage; amounts of material deposited, stores, or spilled; dimensions of source(s); known or suspected hazardous substances.
3. Provide a description of all aquifers beneath the site, including description of overlying materials, depth first encountered, thickness, and composition.
4. Provide the location of all drinking water wells within a 4-mile radius from the site (property boundary) and locate the wells within a 1-mile radius on a 7.5-minute topographic map. Provide information on depth of well(s), screening interval(s), depth of aquifer(s) encountered, population served for multiple wells (i.e., municipal system), provide the number of wells, average annual pumpage of each well, and total population served by system. Include information on all standby wells.
5. Provide information and location (on a 7.5-minute topographic map) of wells within 4 miles that are used to irrigate five or more acres of commercial food or forage crops, or watering of commercial livestock, or ingredient in commercial food preparation, or supply for aquaculture, or supply for a major or designated water recreation area, excluding drinking water use.
6. Provide average number of persons per residence for county (or counties) that the site is located in per the U.S. Census Bureau.
7. Identify and locate all surface water bodies within 2 miles of the site marking off the drainage routed (shown on a 7.5-minute topographic map) from each source to applicable surface water bodies. Provide the average annual cubic feet per second flow for each surface water body within 15 miles downriver or radius from the point of probable entry into surface water. For lakes, provide information on inflow and outflow.
8. Provide the number of acres in each drainage basin.
9. Provide the 2-year, 24-hour rainfall.
10. Provide the location of all drinking water intakes within 15 downstream miles (rivers) or 15-mile radius (lakes, bays, etc.). Provide information on population served. For multiple intakes (i.e., municipal system), provide information on the number of intakes, location of all intakes (regardless of 15-mile limit), and total population served by system. Include information on all standby intakes.

11. Provide information and location of intakes within 15 miles downriver (radius in lake or bay) that are used to irrigate five or more acres of commercial food or forage crops, or watering of commercial livestock, or ingredient in commercial food preparation, or supply for aquaculture, or supply for a major or designated water recreation area, excluding drinking water use.
12. Provide any surface water body 15 miles downriver (radius in lakes or bay) used for drinking water.
13. Provide the average human food chain production (pounds per year) for each surface water body 15 miles downriver of 15-mile radius in lake.
14. Within a 4-mile radius from the site and 15 miles downriver, or radius in lake, identify all sensitive environments that exist. Provide original documentation (U.S. Fish and Wildlife Service [USFWS], Natural Heritage Database, state agencies, National Oceanographic and Atmospheric Administration [NOAA], etc.), multiple sensitive environments within a sensitive environment.
15. What is the linear frontage of all wetlands 15 miles downriver or 15-mile radius in lake?
16. Provide the location and number of persons residing, working, attending school, or day care within 200 feet.
17. Identify all terrestrial sensitive environments that exist onsite. Provide original documentation (USFWS) Natural Heritage Database, state agencies, NOAA, etc.) and locate each on a 7.5-minute topographic map. Note that there could be multiple sensitive environments within a sensitive environment.
18. Provide the total number of people in the following distance rings from source(s):
 - 0 - 1/4 mile
 - 1/4 - 1/2 mile
 - 1/2 - 1 mile
 - 1 - 2 miles
 - 2 - 3 miles
 - 3 - 4 miles.


Use 1990 Census data and/or actual house counts. Document how calculated.

19. Provide the location and area (in acres) of all wetlands within 4 miles of the site.
20. Contact U.S. Environmental Protection Agency (EPA) Regional Office immediately if any radionuclides are present or suspected at the site and supply all radiological information known to date.
21. For all of the above information, use primary data source and supply two copies or specify where copies may be obtained.

22. Provide any removals or remedial actions taken place at the site.
23. If information relevant to a question already has been provided to EPA, your answer may precisely cite the previous submittal by title, date, page, and paragraph number rather than resubmitting the information.

APPENDIX H. INVESTIGATION DERIVED WASTE MANAGEMENT

THIS PAGE WAS INTENTIONALLY LEFT BLANK



America's #1 City

July 11, 1995

UTILITIES DEPARTMENT

Hearing Impaired (605) 339-7039

Captain Alvin Punt, SDANG
114 FG/EM
1201 W Algonquin St.
PO Box 5044
Sioux Falls, SD 57117-5044

FACSIMILE

Dear Capt. Punt:

On July 10, 1995, I received a letter from you requesting an approval for a special discharge. You requested permission to discharge approximately 2000 gallons of water produced in the development of four new monitoring wells at your site. In a phone conversation you stated that you did not expect water to be contaminated except possibly very low levels of hydrocarbons.

I have reviewed your request along with the localized groundwater monitoring results that you submitted. I hereby give a temporary conditional approval to discharge the well development water into the City's sanitary sewer. Discharge is approved upon meeting the following conditions:

1. Wastewater volume shall not exceed 2,500 gallons;
2. Wastewater must be placed in a receptacle for monitoring before discharge;
3. Required Monitoring:
Visual Inspection - must not have a visual sheen
Monitor headspace above water in receptacle - < 5 % LEL
4. Wastewater must be discharged at manhole designated in your request;
5. Discharge is approved between July 12 and July 19, 1995;
6. This is a one time conditional approval specific to your request.

If you have any questions or comments on this matter, please contact my office 339-7088.

Sincerely,

Robert J. Kappel
Environmental Compliance Manager

c: Larry Mutchler, Pretreatment Coordinator

Utility Office
224 West Ninth Street
Sioux Falls, SD 57102
(605) 339-7031
FAX (605) 338-8490

Water Purification
2100 N. Minnesota Ave.
Sioux Falls, SD 57104
(605) 339-7025
FAX (605) 338-7801

Water Reclamation
4500 N. Sycamore Ave.
Sioux Falls, SD 57104
(605) 339-7088
FAX (605) 338-8484

Lights
2000 N. Minnesota Ave.
Sioux Falls, SD 57104
(605) 339-7150
FAX (605) 339-7006

Maint./Svc. Division
668 Algonquin Avenue
Sioux Falls, SD 57104
(605) 339-7020
FAX (605) 338-7883

APPENDIX I. DATA QUALITY ASSESSMENT

THIS PAGE WAS INTENTIONALLY LEFT BLANK

APPENDIX I. DATA QUALITY ASSESSMENT

I.1 INTRODUCTION

A comprehensive quality assurance/quality control (QA/QC) program was followed during the Site Inspection (SI) conducted for Site 12 - Ramp Area and Site 13 - Motor Vehicle Maintenance Facility (MVMF) at the South Dakota Air National Guard (SDANG), Joe Foss Field located in Sioux Falls, South Dakota, to ensure that analytical results and the decisions based on these results are representative of the environmental condition at the sites. The objectives of the SI were to investigate the presence or absence of environmental contamination, and collect and analyze sufficient numbers of samples to support recommendations for further investigation or corrective actions. The following documents were utilized during the evaluation of the QC data: the U.S. Environmental Protection Agency (EPA) Level III; QC requirements contained within the guidelines and specifications presented in the Quality Assurance Project Plan (QAPP) (May 1995) submitted as part of the project plans prepared by Science Applications International Corporation (SAIC); the EPA Contract Laboratory Program (CLP) *Statement of Work for Organics Analysis*; and the EPA *Laboratory Data Validation Functional Guidelines for Evaluating Organics* (1988). The number of soil and groundwater samples collected during the SI, in addition to the numbers of field QC samples collected and selected laboratory QC samples (i.e., matrix spikes/matrix spike duplicates [MS/MSDs]) analyzed, are presented in Tables I-1a and I-1b. The data validation worksheets are referenced within the subsection describing the applicable analysis. The QC checks and results are summarized below.

I.1.1 Data Quality Objectives

A comparison of the SI analytical results to project data quality objectives (DQOs) as defined in the QAPP formed the basis for evaluating the quality of the analytical data. As described in the QAPP, analytical data must be of a known and acceptable quality in order to be used to evaluate contamination at MVMF. DQOs are qualitative and quantitative indicators of data quality. DQOs were established during the initial scoping process to guide the implementation of the field sampling and laboratory analyses for the SI. A QA program was established to standardize procedures and document activities. The program provided a means to detect and correct any deficiencies in the process. DQOs are set to define and establish the

criteria against the fitness of the data. Both quantitative and qualitative DQOs were established for the SI. Data verification and validation of 100 percent of the resulting analytical data packages ensured that Maxim Technologies, Inc. (MT) produced an acceptable quality level for results. Field activities affecting precision and accuracy were controlled by strict adherence to approved standard operating procedures (SOPs) and documentation of the field tasks. Field logbooks noted exceptions to the procedures and chain-of-custody records tracked sample shipments and receipt of these shipments by MT. These results confirmed that no cross-contamination due to sample handling practices or inadequate equipment decontamination occurred. Sampling precision was estimated by the analysis of field duplicate samples. Indicators used to assess both field and laboratory data quality include precision, accuracy, representativeness, comparability, and completeness (PARCC). The following sections summarize the DQOs for the PARCC parameters obtained during the SI.

I.1.1.1 Precision

Precision is a measure of the closeness with which multiple analyses of a given sample agree with each other. It can be defined as the agreement between the numerical values of two or more measurements that have been under identical conditions. Precision can thus be seen as a measure of the magnitude of errors. The overall precision of the measurement data is a mixture of sampling and analytical factors. Analytical precision can be measured through the analysis of MS/MSDs, and sampling precision and spatial variability of contamination can be assessed through the analysis of the field duplicates. Precision is stated in terms of standard deviation, coefficient of variation, range, and relative percent difference (RPD). The RPD between results of duplicate samples for a given compound or element traditionally has been used to assess precision between two samples. The RPD is defined as the ratio of the absolute value of the difference between two results and the mean of the results. RPD was calculated using the following equation:

$$\frac{|C_1 - C_2|}{\left(\frac{C_1 + C_2}{2}\right)} \times 100$$

where:

C_1 = Concentration of the compound or element in the sample

C_2 = Concentration of the compound or element in the duplicate/replicate.

When the RPD approaches zero, complete agreement is achieved between duplicate sample pairs, indicating a high degree of precision.

The RPDs of the MS/MSD samples is the first type of QC sample used to assess the precision of the data quality. The laboratory selected 1 sample in 20 and split the sample into 3 sample portions. MS/MSD samples were prepared by routinely analyzing the first portion for the parameters of interest, while the remaining two portions were spiked with known quantities of the parameters of interest before analysis. The RPD between the spike results was calculated and used as an indication of the analytical precision for the solvents; benzene, toluene, ethylbenzene, and xylenes (BTEX), total petroleum hydrocarbons (TPH) as gasoline; and TPH as extractables.

All RPD values calculated from the solvents (7 values reviewed), BTEX and TPH as gasoline (12 reviewed values), and TPH as extractables (2 reviewed values) soil MS/MSD analyses were within the methods control limits. Since each analysis was evaluated according to the required QC criteria described in Section I.3 and all of these criteria were met for the environmental samples analyzed, these RPD values are considered to be a more representative reflection of the variability characteristic of the environmental condition at MVMF, and as a result, the analytical DQO for solvents, BTEX, and TPH precision is considered to have been met. Overall, the analytical precision DQO for those analyses is considered to have been met. The analytical QC criteria used to evaluate analytical precision and all MS/MSD results are discussed in Section I.3.

The second type of QC sample, field duplicate samples, was included as part of the SI. Field duplicate samples assess the precision of the sampling techniques and spatial variability of the contamination. Field duplicates were collected using the same techniques as those used to collect the environmental samples. Field duplicates were collected at a rate of 1 duplicate per

10 field samples per matrix for each parameter. No corrective action was taken based on RPD results. Field RPD values were calculated only for compounds detected in concentrations greater than the contract required quantitation limits (CRQLs) and method detection limits (MDLs) in both replicate pair samples or in one sample. No specific control limits for field precision were established in part because the natural heterogeneity of the environmental media was much greater than the variability imparted by field activities.

No solvents, BTEX, and TPH as extractables were detected in soil and groundwater field duplicates. TPH as gasoline was detected in one soil field duplicate (i.e., GS6-2) and one groundwater field duplicate (i.e., GW12-6) collected from Site 12. RPD values were 200 percent for TPH as gasoline. These are attributable to TPH as gasoline concentrations being near the MDL in the field samples.

Overall, project precision for environmental analyses has been determined to be adequate for the uses of the analytical data, which were to identify the contaminants and provide an assessment of the distribution of each compound in both soil and water matrices. Section I.2 presents a comprehensive discussion of all field duplicate sample results.

I.1.1.2 Accuracy

Accuracy is the closeness of agreement between an observed result and the true value for a sample analysis. Accuracy can be evaluated for a particular method by measuring the agreement between an observed result from analysis of a reference standard with an analytical lot and its certified value. Accuracy is usually expressed in terms of bias (high or low). Bias is assessed by the percent recovery of a compound or element that has been added to the QC sample or environmental sample prior to analysis. Sampling accuracy is assessed by evaluating the results of the trip blanks, field blanks, and equipment blanks; analytical accuracy is assessed through the use of MS/MSDs. Analytical accuracy is expressed as the percent recovery of a

compound or element that has been added to the environmental sample at a known concentration before analysis. The percent recovery values were calculated using the following equation:

$$\frac{S_s - S_o}{S_a} \times 100$$

where:

S_s = Total compound or element concentration detected in the spiked sample

S_o = Concentration of the compound or element detected in the unspiked sample

S_a = Concentration of the compound or element added to the sample.

Analytical accuracy for this project was measured through the use of surrogate field samples and MS/MSD samples. Each type of spike provided different information on the accuracy of the measurement system.

The percent recoveries of the surrogates for solvents, BTEX, TPH as gasoline, and TPH as extractables analyses were the first type of QC used to assess the accuracy of the data quality. Surrogate compounds spiked into field samples provide information on the efficiency of all steps of the gas chromatography/mass spectrometry (GC/MS) and GC methods in recovering these compounds from the individual sample matrices. In the EPA analytical program, surrogate recoveries are used to determine if an analytical method is in control and to obtain information on recovery effects in the environmental matrix. The QC limits for recovery of all surrogates for soil and water environmental samples for solvents were those established for the EPA CLP. The QC limits for recovery of all surrogates for soil and water environmental samples for BTEX and TPH extractables were those established by the laboratory for SW Method 8020 and Hazardous Materials Laboratory, California Department of Health Services (CAL DHS) method. All surrogate percent recoveries were within the applicable control limits. All supporting volatile organic compound (VOC) and TPH information cited above also was qualitatively evaluated with respect to the analytical accuracy DQO.

The percent recoveries of the MS/MSD for solvents, BTEX, TPH as gasoline, and TPH as extractables analyses was the second type of QC used to assess the accuracy of the data quality. Accuracy determined by MS/MSD samples is a function of both matrix and method. All VOC MS/MSD percent recoveries were within the control limits. Recovery values of two out of four reviewed TPH as extractables MS/MSD results were above the 125 percent limit. Above upper limit recoveries in the natural matrix spikes indicate possible interferences and possible high bias data. Despite these values, no systematic laboratory error was detected; however, the results are considered to have little impact on the overall environmental data quality. All supporting metals QC information cited above also was qualitatively evaluated with respect to the analytical accuracy DQO. Based on the evaluation of the MS/MSD results and the associated laboratory QC results summarized in Section I.3 on a project-wide basis, the laboratory accuracy has been determined to be acceptable for all analyses, and as such, the analytical DQO for accuracy was met, except where noted.

Sampling accuracy was maximized by the adherence to the strict QA program presented in the SI QAPP. All procedures (i.e., soil boring and groundwater sample collection; equipment decontamination; and health monitoring equipment calibration and operation) used during the SI were documented in the QAPP. Field QC blanks (i.e., trip blanks, field blanks, and equipment blanks) were prepared to ensure that all samples represent the particular site from which they were collected, assess any cross-contamination that may have occurred, and qualify the associated analytical data accordingly.

During the sampling program, approximately 14 percent of the samples collected during the program were field QC blanks (i.e., trip blanks, field blanks, and equipment blanks) obtained to determine the degree of cross-contamination or ensure successful decontamination procedures. Based on an evaluation of the compounds detected in the field QC blanks, the overall field accuracy is acceptable. As a result, the field DQO for accuracy is considered to have been met. A comprehensive discussion of the field QC results is presented in Section I.2.

1.1.1.3 Representativeness

Representativeness is defined as the degree to which the data accurately and precisely represent a characteristic of a population, parameter variations at a sampling location, a process condition, or an environmental condition. Representativeness is the qualitative parameter concerned most with the proper design of the sampling program. The selected sampling methods ensure that an environmental sample accurately represents the characteristic population from which it was obtained. Although considerable information was available regarding the historical activities conducted at the SI sites, potential contaminant source areas within the sites were not well-defined at all of the sites. Soil samples were collected from areas suspected of having the highest potential for contamination and to obtain areal coverage of the sites. Factors that affect the representativeness of the analytical data include improper preservation, holding times, use of standard analytical methods, and matrix or analyte interferences. Holding times and preservation criteria are based on the most restrictive holding times recommended by EPA for water and soil matrices. Sample representativeness was ensured during the SI by collecting sufficient samples of a population medium, properly distributed with respect to location and time. Representativeness was assessed by reviewing the drilling techniques and equipment, sample collection methods, equipment, and sample containers used during the SI, in addition to evaluating the RPD values calculated from the duplicate samples. The reproducibility of a representative set of samples reflects the degree of heterogeneity of the sampled medium, as well as the effectiveness of the sample collection techniques. Intervals for soil sampling were chosen to obtain the strata with the highest concentrations of contaminants in order to achieve the most conservative representation and to optimize the number of samples required.

Based on the evaluation of the factors described above and summarized in Section I.3, the samples collected during the SI are considered to be representative of the environmental condition at SDANG.

1.1.1.4 Comparability

Comparability is a qualitative parameter expressing the confidence with which one data set can be compared to another and is limited to the other PARCC parameters, because only when precision and accuracy are known can one data set be compared to another. Quantitative

criteria for determining if representativeness has been achieved are not specifically stated. To optimize comparability, only the specific methods and protocols that were specified in the QAPP were used to collect and analyze samples during the SI at MVMF. By using consistent sampling and analysis procedures, all data sets were comparable within the sites at SDANG, between sites at the installation, or among U.S. Army facilities nationwide, to ensure that remedial action decisions and priorities were based on a consistent data base. Comparability also was ensured by the analysis of EPA reference materials, establishing that the analytical procedures used were generating valid data. The SI utilized one laboratory to perform the analyses and the same sampling method for each medium. All samples collected for VOCs (i.e., solvents) were analyzed using the EPA CLP statement of work (SOW), BTEX and TPH as gasoline were analyzed using EPA solid waste methods. TPH as extractables was analyzed using CAL DHS method. Based on the precision and accuracy assessment presented above, the data collected during the SI are considered to be comparable with the data collected during previous investigations.

I.1.1.5 Completeness

Completeness is defined as the percentage of valid data obtained from the sampling and analysis process. For data to be considered valid, they must have met all acceptance criteria, including accuracy and precision, as well as any other criteria specified by the analytical methods used.

Furthermore, project completeness is defined as the percentage of data used to prepare a preliminary human health-based risk evaluation and upon which recommendations for site remediation are based. For analytical data to be considered usable for the preliminary risk evaluation and remediation recommendations, each data point must be satisfactorily validated. Results that have been flagged for various reasons may be considered to have encountered minor problems with limited impact on the data quality. The completeness of both laboratory analyses and sampling will be evaluated for each site. DQOs for the SI at MVMF were set at 95 percent for both the field sampling and laboratory completeness.

Site 12—Based on an evaluation of the laboratory QC, 100 percent of the BTEX and TPH data points were used as a basis for evaluating the magnitude and extent of contamination. Field completeness for soil and groundwater samples was 100 percent. Eleven soil boring samples and 14 groundwater samples were planned and actually collected from Site 12.

Site 13—The laboratory completeness for BTEX, solvents, and TPH analyses was 100 percent. Based on the evaluation of the field sampling, field completeness was 100 percent for Site 13. Nine soil borings samples and eight groundwater samples were scheduled and actually collected at Site 13.

I.2 FIELD QUALITY CONTROL ASSESSMENT

During all phases of the SI sampling program, QC samples were collected to gauge the impacts from various components of field activities. Approximately 18 percent of the samples collected during the program were QC samples obtained to determine the degree of cross-contamination, ensure successful decontamination procedures, or determine the effects of media heterogeneity on results. Six trip blanks, six field blanks, five equipment blanks, and five field duplicates (i.e., two soil and three groundwater) were collected and analyzed for the same compounds and using the same laboratory techniques as those used to analyze the environmental samples. Trip blanks, field blanks, and equipment blanks provide a measure of various sources of cross-contamination, decontamination efficiency, and any other potential error that can be introduced from sources other than the sample. Table I-2 contains a cross-reference of environmental samples to the associated field QC blank sample.

I.2.1 Trip Blanks

Trip blanks were collected to determine if cross-contamination of VOCs occurred during sample handling or shipment of environmental samples to the laboratory. Trip blanks were prepared by MT, located in Sioux Falls, South Dakota. Each trip blank consisted of two volatile organic analysis (VOA) vials per shipping cooler. These blanks were prepared with organic-free reagent water, sent to SDANG, stored with the unused sample bottles, and returned to the laboratory with each cooler containing environmental samples to be analyzed for VOCs (i.e., solvents and BTEX). Trip blanks were analyzed by EPA CLP OLMO1 SOW (solvents)

and SW8020 (BTEX). Table I-3 summarizes the concentrations of the detected solvents and VOCs in the trip blanks collected during the SI.

Solvents Analyses—Four trip blanks were collected and analyzed for solvents using EPA CLP OLMO1 SOW. Analytical results show that 1,1,1-trichloroethane was detected in one trip blank (i.e., TB02) at a concentration below the CRQL. The presence of 1,1,1-trichloroethane is not considered to be representative of environmental conditions at SDANG, since this solvent was not detected in the associated environmental samples.

BTEX Analyses—Six trip blanks were collected and analyzed for BTEX using EPA SW Method 8020. Analytical results show that BTEX were not detected in any trip blank.

1.2.2 Field Blanks

Field blanks were collected to provide baseline analytical data for the water used for equipment decontamination (i.e., American Society for Testing and Materials [ASTM] Type II reagent water) and in the steamcleaner equipment (i.e., potable water). Field blanks were collected by randomly selecting sample containers from the supply, filling them with the appropriate water source, and then preserving and analyzing these blanks for the same compounds and using the same laboratory methods as those used for the associated environmental samples. Table I-4 summarizes the concentrations of the detected compounds in the field blanks collected during the SI.

Solvents Analyses—Six field blanks were collected and analyzed for solvents using EPA CLP OLMO1 SOW. No unacceptable level of contamination was detected in the field blanks. Contamination was limited to two compounds: 1,1,1-trichloroethane and chloroform. 1,1,1-Trichloroethane (i.e., 2 µg/L) was detected in one field blank. Chloroform was detected in four field blanks, with a minimum concentration of 2 µg/L and a maximum of 34 µg/L. Since these solvents have not been detected in the associated environmental samples, no data validation flags were applied.

BTEX and TPH as Gasoline Analyses—Six field blanks were collected and analyzed for BTEX and TPH as gasoline using EPA SW Method 8020. Analytical results show that BTEX and TPH as gasoline were not detected in any field blank.

TPH as Extractables Analyses—Six field blanks were collected and analyzed for BTEX and TPH as extractables using CAL DHS. Analytical results show that TPH as extractables was not detected in any field blank.

1.2.3 Equipment Blanks

Equipment blanks provide a measure of the cumulative contamination derived from field sampling equipment, sample transit, storage, and analysis. Equipment blanks were prepared for manual and small automated sampling equipment used to collect environmental samples. One equipment blank was collected every day for each medium sampled by pouring ASTM Type II water into, through, or over a clean piece of sampling equipment and then dispensing the water into prepared sample bottles. Equipment blanks were shipped to the laboratory to be analyzed using the methods required for the environmental samples collected on the same day. All analytical data were reviewed for potential bias introduced from equipment blanks. Table I-5 summarizes the concentrations of the compounds detected in the equipment blanks collected during the SI. The following subsections summarize the compounds and elements detected in these blanks and the impact of any interference on the environmental data quality.

Solvents Analyses—Three equipment blanks were collected and analyzed by MT for solvents using EPA CLP OLMO1. No unacceptable level of contamination was detected in the equipment blanks. Chloroform was detected in two equipment blanks (i.e., 28 and 29 $\mu\text{g/L}$). Since this solvent has not been detected in the associated environmental samples, no data validation flag was applied.

BTEX and TPH as Gasoline Analyses—Five equipment blanks were collected and analyzed by MT for BTEX and TPH as gasoline using SW Method 8020. Analytical results show that BTEX and TPH as gasoline were not detected in any equipment blank.

TPH as Extractables Analysis—Five equipment blanks were collected and analyzed by MT for TPH as extractables using CAL DHS. No TPH was detected in the equipment blanks.

1.2.4 Field Duplicates

One duplicate environmental sample was collected for every 10 environmental samples, as required by the QAPP. Duplicate sample pairs were collected to ascertain the contribution of variability (i.e., precision) due to environmental media. Twenty soil and two duplicate samples, in addition to six groundwater and one duplicate sample, were collected. One field duplicate soil sample was collected after each 10 environmental samples, as indicated on the chain-of-custody forms. As required by the QAPP, soil samples were collected at specific intervals in the borehole. Specific samples to be sent to the laboratory were selected based on location in the borehole (e.g., at the water table) and health monitoring equipment (i.e., organic vapor analyzer [OVA]). Therefore, duplicate sample selection was less straightforward using these sample selection criteria than simply replicating 1 sample for every 10 collected, since samples were selected only after the drilling had been completed or the monitoring well had been screened. After the split-spoon was retrieved from the borehole, the samples to be screened for VOCs were immediately collected in the sample container. All soil samples to be analyzed by MT were collected using split-spoons equipped with 3-inch brass or stainless-steel sleeves. After the split-spoon sampler was retrieved from the borehole, VOC and TPH sleeves were capped and labeled, and each sample was then shipped to the laboratory in the liner. Therefore, the duplicate concentrations measured by the laboratory reflect the natural matrix variability inherent in the subsurface soils at Site 13 and were not used to assess sample collection precision. As required by the QAPP, water samples were collected to minimize loss of VOCs. The first bailer volume was used to fill the original and replicate sample vials. The next bailer volume was used to fill the bottles for the remaining parameters.

Field RPD values were calculated for compounds and elements detected in concentrations greater than the CRQL or MDL in both replicate pair samples or in one sample. Tables I-6 and I-7 summarize the concentrations of the compounds detected in the soil and groundwater replicate pair collected during the SI.

Solvents Analyses—Nine soil samples and four groundwater samples were collected during the SI and analyzed for solvents by EPA OLMO1 SOW. Two soil samples and two groundwater samples were collected in duplicate. RPD values were not calculated for compounds not detected in both the sample and duplicate sample.

No solvents were detected in the soil and groundwater field duplicates. Precision for solvents collection field duplicates analyses have been determined to be adequate for the SI.

BTEX and TPH as Gasoline Analyses—Twenty soil samples and 22 groundwater samples were collected during the SI and analyzed for BTEX and TPH as gasoline using SW Method 8020. Two soil and three water samples were collected in duplicate. RPD values were not calculated for compounds not detected in both the sample and duplicate samples. TPH as gasoline was detected in one soil field duplicate (i.e., GS6-2) and one groundwater field duplicate (i.e., GW12-6) collected from Site 12. RPD values were 200 percent for TPH as gasoline. These values are attributable to TPH as gasoline concentrations being near the MDL in the field samples. These RPD values include both fluctuations in the sampling and analytical variability.

TPH as Extractables Analyses—Twenty soil samples and 22 groundwater samples were collected during the SI and analyzed for TPH as extractables using CAL DHS. Two soil samples and three groundwater samples were collected in duplicate. RPD values were not calculated for compounds not detected in both the sample and duplicate sample.

No TPH as extractables were detected in the soil and groundwater field duplicates. Precision for solvents collection field duplicates analyses have been determined to be adequate for the SI.

I.3 LABORATORY QUALITY CONTROL ASSESSMENT

All environmental (i.e., soil and groundwater) samples and field QC blanks (i.e., trip blanks, field blanks, and equipment blanks) collected during the SI at MVMF were analyzed using EPA methods from the following references:

- *Test Methods For Evaluating Solid Waste, Physical/Chemical Methods*, SW846 (BTEX and TPH)
- *Statement of Work for Organic Analysis, Multi-Media, Multi-Concentration, EPA Contract Laboratory Program, OLM01 August 1991* (solvents).
- *Hazardous Materials Laboratory, California Department of Health Services*, February 1988 (TPH as extractables).

During the review and evaluation process, 100 percent of the analytical data generated using EPA methods were subject to a systematic and rigorous technical process by examining all analytical QC results and laboratory documentation, following the appropriate guidelines for laboratory data validation. The purpose of this section is to provide an assessment of the QA/QC results from the SI to confirm that the data used in this report meet the DQOs established for this investigation. Both quantitative measures and qualitative assessments will be presented to characterize these data as having sufficient quality to satisfy these objectives. The primary intent of this assessment is to illustrate that data originating from the SI can withstand scientific scrutiny and are technically defensible, and are of a known and acceptable precision and accuracy. All data were validated using the guidelines and specifications described in the following document:

- *Laboratory Data Validation Functional Guidelines Evaluating Organics Analyses*, EPA CLP, February 1988.

I.3.1 Organic Analyses

Environmental (i.e., soil and groundwater) samples and field QC blanks (i.e., trip blanks, field blanks, and equipment blanks) collected during the SI were submitted to MT for solvents, BTEX, TPH as gasoline, and TPH as extractables analyses. A data quality assessment is presented in the following subsections.

I.3.1.1 Solvents Analyses (EPA OLMO1 SOW)

Nine soil samples, 4 groundwater samples, and 13 field QC blanks (i.e., trip blanks, field blanks, and equipment blanks) were collected and analyzed by MT for solvents (i.e., vinyl chloride, chloroform, 1,1,1-trichloroethane, trichloroethene, 1,2-dichloroethane, tetrachloroethane, and carbon tetrachloride) using EPA OLMO1 SOW. Data quality was evaluated using the guidelines and control limits specified for holding times, tuning and mass calibration results, initial and continuing calibration verification, method blanks, system monitoring compounds recoveries, internal standard areas, and MS/MSD results. The VOC data validation worksheets are presented in Table I-8.

Holding Times—Holding times are used to ascertain the validity of results based on the holding time of the sample from the time of collection to the time of analysis. MT was required by the QAPP and analytical methods to meet holding times of 7 days for unpreserved water samples, 14 days for preserved (i.e., sufficient hydrochloric acid to lower the pH to 2) water samples, and 14 days for soil samples collected for solvents analysis.

Analysis of samples that have exceeded the method-recommended holding times may result in the following: 1) concentrations of compounds that would have been detected ordinarily are undetected due to chemical transformation, compound volatilization, or biodegradation; 2) reported concentrations lower than those originally present due to the factors previously stated; or 3) reported concentrations greater than those originally present in the sample due to external contamination of water samples or changes in soil moisture content. Based on an evaluation of all environmental samples and field QC blanks analyzed for solvents, all holding time criteria were met.

Tuning and Mass Calibration Results—The first step in the calibration of the GC/MS system is to ensure correct mass calibration, mass resolution, and mass transmission. This was accomplished, in addition to a sensitivity check, using p-bromofluorobenzene (p-BFB) injected at a 50 ng concentration, as required by the SOW protocol. This standard was analyzed every 12 hours to ensure that the GC/MS was tuned correctly. Based on an evaluation of the

ionization and fragmentation criteria, in addition to the instrument tune frequency, all p-BFB tuning and mass calibration criteria requirements were met.

Initial Calibration Results—Compliance requirements for satisfactory instrument calibration have been established to ensure that the instrument is capable of producing acceptable quantitative data. Calibration of each GC/MS used to analyze the samples collected during the SI were established and validated by injecting standards at five concentrations, spanning the expected sample concentration range. Initial calibration was conducted after the GC/MS tune criteria were met and before any samples were analyzed to determine the instrument sensitivity and the linearity of each compound. The linearity is important to ensure reasonable quantitative results over the range of the curve. Following initial calibration, all compounds were evaluated to verify the validity of the calibration. Specifically, the relative response factors (RRFs) and percent relative standard deviation (%RSDs) for all solvents were evaluated to verify the validity of the initial calibration. Calibration criteria requirements (i.e., greater than 0.050 and less than 30 percent for RRFs and %RPDs, respectively) for solvents were presented in the Laboratory Data Validation Functional Guidelines for Evaluating Organics Analyses. All criteria requirements were met.

Continuing Calibration Verification Results—A check of the calibration curve was conducted before and after environmental samples were analyzed each day. The first daily standard in the BFB tuning period was used for quantitation of all sample analyses performed during the 12-hour period. The continuing calibration verification (CCV) was used for quantitation and to verify that the working curve is still valid. The CCV standard of the GC/MS system is evaluated based on the magnitude of the RRFs and percent difference (%D) between the average RRF of each compound for the initial calibration and the RRF of that compound in the CCV standard. CCV criteria requirements (i.e., greater than 0.050 and within ± 25 percent for RRFs and %Ds, respectively) for solvents were presented in the Laboratory Data Validation Functional Guidelines for Evaluating Organics Analyses. Based on an evaluation of the CCVs conducted for solvents analyses, all criteria requirements were met.

Internal Standard Summaries—Three internal standards (ISs) (i.e., bromochloromethane, 1,4-difluorobenzene, and chlorobenzene-d₅) were added to all calibration standards, environmental samples, and QC blanks immediately before analysis as indicators of instrumental operating variations. The concentration of solvents detected in each sample was calculated with reference to the response factor (RF) of the appropriate IS for that compound. Internal standard area requirements are described in the EPA OLMO1 SOW. Based on an evaluation of all analyses, all internal areas were within the control limits.

System Monitoring Compounds Recoveries—Three deuterated compounds (i.e., 1,2-dichloroethane-d₄, toluene-d₈, and p-BFB) were added to each calibration standard, environmental sample, and laboratory and field QC sample immediately before analysis. Surrogate compounds spiked into field samples provide information on the efficiency of all steps of the GC/MS method in recovering these compounds from the individual environmental sample matrices. Since surrogate recoveries were spiked into every environmental sample, they were the primary tool used to determine if matrix interferences were present during solvent analyses. The QC limits for recovery of all surrogates for soil and water samples were those established for the EPA CLP SOW. All surrogate percent recoveries were within the applicable control limits for environmental samples. Tables I-9 and I-10 summarize the surrogate recovery results for the soil and water samples that were evaluated, respectively.

Method Blank Results—One method blank analysis was conducted for each analytical lot of environmental samples analyzed for solvents. Each method blank was evaluated for contaminants that prevent accurate quantitation of a target compound. If any problems with any blank existed, all data associated with the case were carefully evaluated to determine whether an inherent variability in the data for the case exists, or if the problem is an isolated occurrence that would not affect the data. Based on an evaluation of all method blanks analyzed for solvents using EPA OLMO1 SOW, no solvents were detected at a level and frequency that might bias the analytical results, except for chloroform. This solvent was noted in the method blank (i.e., VBLK3500) analyzed on July 25, 1995. No validation flag was applied, since this solvent was not detected in the associated environmental samples.

Matrix Spike/Matrix Spike Duplicate Results—MS/MSD analyses were conducted to assess the accuracy and precision of the laboratory and to evaluate the matrix effect of the sample upon the analytical methodology based upon the percent recovery of each compound. Accuracy was expressed as the percent recovery of the spike compounds. Precision was expressed as the RPD of the concentrations of the spike compounds in the MS/MSD samples. The control limits for percent recoveries in soil and water samples are described in the QAPP. MS/MSDs were evaluated to verify that one MS/MSD analysis was conducted for every 20 environmental sample received by the laboratory, that these analyses were conducted on environmental samples only, and that the recovery and difference results did not indicate systematic laboratory control problems. Table I-11 summarizes the MS/MSD results for soil samples.

All recovery and RPDs reviewed values for soil solvents MS/MSDs were within the EPA CLP advisory control limits. No MS/MSD analyses were conducted for groundwater samples collected during the SI.

I.3.1.2 BTEX and TPH as Gasoline Analyses (EPA Method 8020)

Twenty-two soil samples, 14 groundwater samples and 9 field QC blanks (i.e., trip blanks, field blanks, and equipment blanks) were collected and analyzed by MT for BTEX and TPH as gasoline using EPA Method 8020. Data quality was evaluated using the guidelines and control limits specified for holding times, initial and continuing calibrations, method blanks, surrogate internal standards, surrogate recoveries, and MS/MSD results. The BTEX and TPH as gasoline data validation worksheets are presented in Table I-12.

Holding Times—The objective is to ascertain the validity of results based on the holding time of the sample from the time of collection to the time of analysis. MT was required by the QAPP and analytical method to meet holding times of 14 days for soil and water samples. Based on an evaluation of all environmental samples and field QC blanks analyzed for BTEX and TPH as gasoline using EPA SW846 Method 8020, all holding time criteria were met.

Initial Calibration Results—Compliance requirements for satisfactory instrument calibration have been established to ensure that the instrument is capable of producing acceptable quantitative data. Calibration of each GC used to analyze the samples collected during the SI were established and validated by injecting standards at eight concentrations, spanning the expected sample concentration range. One of the standard concentrations was at a concentration near, but above, the method detection limit. Initial calibration was conducted before any samples were analyzed to determine the instrument sensitivity and the linearity of each compound. Following initial calibration, all compounds were evaluated to verify the validity of the calibration. Specifically, the response factors were calculated for BTEX and the results were used to establish the calibration curves. These calibration curves were used for BTEX, TPH as gasoline, and surrogate quantitation. All initial calibration criteria were met.

Continuing Calibration Standard Results—A check of the calibration curve was conducted before and after environmental samples were analyzed each day. The continuing calibration standard (CCS) was used to verify that the working curve is still valid. The CCS of the GC system was evaluated based on the magnitude of the instrument response for BTEX. The instrument response for BTEX and TPH as gasoline from the CCS must agree within ± 15 percent with the predicted response, and all preceding standard in an analysis sequence should fall within the daily retention time window established by the first standard of the sequence. Based on an evaluation of the CCSs conducted for BTEX and TPH as gasoline analyses, all criteria were met.

Surrogate Recoveries—One surrogate (i.e., α, α, α -trifluorotoluene) was added to each calibration standard, environmental sample, and laboratory and field QC sample immediately before analysis. Surrogate compounds spiked into field samples provide information on the efficiency of all steps of the GC method in recovering this compound from the individual environmental sample matrices. Since α, α, α -trifluorotoluene was spiked into every environmental sample, it was the primary tool used to determine if matrix interference was present during BTEX and TPH as gasoline analyses. The QC limits for recovery of α, α, α -trifluorotoluene in soil and water samples were submitted by MT for each analytical run (i.e., lower control limit and upper control limit). All surrogate recoveries were within the

recommended control limits. Tables I-13 and I-14 summarize the surrogate recovery results for soil and water samples, respectively.

Method Blank Results—One method blank analysis was conducted for each analytical lot of environmental samples analyzed for BTEX and TPH as gasoline. Each method blank was evaluated for contaminants that prevent accurate quantitation of a target compound. Based on an evaluation of all method blanks analyzed for BTEX and TPH as gasoline using EPA Method 8020, no BTEX and TPH as gasoline were detected in the method blanks.

Matrix Spike/Matrix Spike Duplicate Results—MS/MSD analyses were conducted to assess the accuracy and precision of the laboratory and to evaluate the matrix effect of the sample upon the analytical methodology based upon the percent recovery of each compound. Accuracy was expressed as the percent recovery of the spike compound. Precision was expressed as the RPD of the concentration of the spike compound in the MS/MSD samples. The control limits for percent recoveries in soil and water samples were described in the QAPP. MS/MSDs were evaluated to verify that one MS/MSD analysis was conducted for each 20 environmental samples received by the laboratory, that these analyses were conducted on environmental samples only, and that the recovery and difference results did not indicate systematic laboratory control problems. Table I-15 and I-16 summarize the MS/MSD results for soil and groundwater samples, respectively.

Five MS/MSD analyses were validated for soil samples collected during the SI. All MS/MSD recovery and RPD values were within control limits. Two MS/MSD analyses were conducted using groundwater samples collected during the SI. All MS/MSD and RPD values were within the control limits.

I.3.1.3 TPH as Extractables Analyses (CAL DHS)

Twenty soil samples, 22 groundwater samples, and 11 field QC blanks were collected during the SI and analyzed for TPH using CAL DHS. Data quality was evaluated using the guidelines and control limits specified for holding times, instrument calibration, method blanks,

surrogate recovery results, MS/MSDs, and laboratory control sample. The data validation worksheets are presented in Table I-17.

Holding Times—MT was required to meet an extraction holding time of 7 days for soil samples and water samples. All analyses were required within 40 days after collection. Based on an evaluation of all environmental samples and field QC blanks extracted and analyzed for TPH, all holding time criteria were met.

Instrument Calibrations—Calibration of the GC used to analyze the samples collected during the SI for TPH as extractables was established by injecting standards at six concentrations, spanning the expected sample concentration range. Initial calibration was conducted before any samples were analyzed to determine the instrument sensitivity. The instrument responses were used to establish the calibration curve. The calibration curve was fitted by a linear equation. This equation was used for TPH as extractables quantitation.

Based on an evaluation of the initial calibration conducted for TPH as extractables analyses, all criteria requirements were met.

Calibration Verification Results—Daily and every 10 samples, a calibration check standard was analyzed. Following the standard analyses, percent recovery values were calculated for each element to verify that the initial calibration remained acceptable. Calibration check standard criteria requirements included 85 to 115 percent, as required by the CAL DHS method. Based on an evaluation of the continuing calibrations conducted, all percent recovery values were within control limits.

Method Blank Results—One method blank was extracted and analyzed with each lot of samples analyzed during the SI for TPH as extractables. Based on an evaluation of all method blanks analyzed, no TPH as extractables was detected in the method blanks.

Surrogate Recoveries—One surrogate compound (i.e., pentacosane) was added to each calibration standard, environmental sample, and laboratory and field QC sample immediately

before TPH as extractables analysis. Surrogate compounds spiked into field samples provide information of the efficiency of all steps of the GC method in recovering this compound from the individual environmental sample matrices. Since pentacosane was spiked into every environmental sample, it was the primary tool used to determine if matrix interference was present during TPH as extractables analysis. All surrogate recoveries were within the recommended control limits. Tables I-18 and I-19 summarize the surrogate recovery results for soil and water samples, respectively.

Matrix Spike/Matrix Spike Duplicate Results—MS/MSD analyses were conducted to assess the accuracy and precision of the laboratory and to evaluate the matrix effect of the sample upon the analytical methodology based upon the percent recovery of each compound. Accuracy was expressed as the percent recovery of the spike compounds. Precision was expressed as the RPD of concentration of the spike compound in the MS/MSD samples. The control limits for percent recoveries are 85-115 percent for TPH as extractables in water samples, and 75-125 percent for TPH as extractables in soil samples. The acceptable RPD upper limits applied to each analytical lot for TPH water is 20 percent and for TPH as extractables in soil samples analyses is 30 percent. MS/MSD samples were evaluated to verify that 1 spiked sample analysis was conducted for 20 environmental samples received by the laboratory, that these analyses were conducted on environmental samples only, and that the recovery and difference results did not indicate laboratory control problems. Tables I-20 and I-21 summarize the MS/MSD results for soil and groundwater samples.

Two MS/MSD analyses were conducted using soil samples collected during the SI. Two recoveries (of 4 reviewed values) calculated from the TPH soil MS/MSD analyses were greater than the 125 percent limit. The MSD recovery of TPH as extractables was 136 percent in GS01-1 and 131 percent in GS13-1-1 MS. The laboratory check sample (LCS) and surrogate recoveries were within acceptable criteria. All RPDs were within the control limits. The fact that high recoveries were observed supports the idea that these deviations were the result of heterogeneity rather than a problem in spiking or an analysis problem. Therefore, no action was taken based on MS/MSD results. One MS/MSD analysis was conducted using groundwater samples collected during the SI. All MS/MSD results were within the control limits.

Laboratory Check Sample Analysis—One LCS was extracted and analyzed with each analytical lot of soil and groundwater samples analyzed by MT. The LCS serves as a monitor of the overall accuracy and performance of all steps in the analysis, including sample preparation. The recovery results of each LCS analyzed were evaluated against 80 to 120 percent for TPH as extractables control limits. Based on an evaluation of all LCS analyses, the percent recoveries were within the control limits.

1.3.4 Assessment Summary

During the SI, 58 samples were collected, resulting in an analytical data base of more than 800 discrete analyses (i.e., compounds). The SI field effort provided 100 percent of the planned samples to complete the assessment. The primary objective of this SI QA program was to assess and summarize the quality and reliability of the data for the intended use and to document factors that may affect the usability of the data. Technical criteria examined during the data validation phase included:

- Holding times
- Instrument calibration
- Blanks
- Surrogate recoveries
- MS/MSD analyses
- Field duplicates
- Internal standard performance
- GC/MS tuning
- Compound quantitation and reported detection limits.

For the purposes of this SI, sample data have met all criteria for their intended use.

THIS PAGE WAS INTENTIONALLY LEFT BLANK

DATA QUALITY ASSESSMENT TABLES

Table: I-1a. Analytical Methods and Total Number of Groundwater Samples Collected
South Dakota Air National Guard, Joe Foss Field

[illegible]

Table I-2. Field QC Blank Cross Reference
South Dakota Air National Guard, Joe Foss Field

Sample No.	Lab Sample No.	Sample Date	Solvents-WA	BTEX and TPH as Gasoline-WA		TPH as Extractable-WA	Solvents-SO	BTEX and TPH as Gasoline-SO		TPH as Extractable-SO
			EPA OLMO1 SOW	SW846 8020	CAL DHS	EPA OLMO1 SOW	SW846 8020	CAL DHS		
TB01	95-5340	6/13/95		X						
TB02	95-5341	6/13/95	X	X						
TB03	95-5399	6/15/95					X	X		
TB04	95-5441	6/16/95								
TB05	95-6150	7/18/95	X	X						
TB06	95-7157	8/29/95	X	X				X	X	
FB01	95-5342	6/13/95					X		X	
FB02	95-5343	6/13/95					X	X	X	
FB03	95-6151	7/18/95	X	X	X	X				
FB04	95-6152	7/18/95	X	X	X	X				
FB04	95-7154	8/29/95	X	X	X	X				
FB05	95-7155	8/29/95	X	X	X	X		X	X	
EB01	95-5344	6/13/95								
EB03	95-5395	6/15/95		X	X	X				
EB04	95-5396	6/15/95					X	X	X	
EB05	95-6155	7/18/95	X	X	X	X				
EB06	95-7156	8/29/95	X	X	X	X				

**Table I-3. Data Summary Table: Trip Blanks - Ramp Area and Motor Vehicle Maintenance Facility,
South Dakota Air National Guard, Joe Foss Field**

Sample No. Collection Date Depth (ft)	TB01 6/13/95 0	TB02 6/13/95 0	TB03 6/15/95 0	TB04 6/16/95 0	TB05 6/18/95 0	TB06 8/29/95 0
SOLVENTS/EPA OLM01 SOW						
Laboratory ID Number	95-5341		95-5399		95-6150	
Parameter	Units	CRQL	N/A			
Vinyl Chloride	µg/L	10	10U	N/A	10U	10U
Chloroform	µg/L	10	10U	N/A	10U	10U
1,1,1-Trichloroethane	µg/L	10	10U	N/A	10U	10U
Trichloroethene	µg/L	10	10U	N/A	10U	10U
1,2-Dichloroethane	µg/L	10	10U	N/A	10U	10U
Tetrachloroethane	µg/L	10	10U	N/A	10U	10U
Carbon tetrachloride	µg/L	10	10U	N/A	10U	10U
BTEX /SW846 8020						
Laboratory ID Number	95-5340		95-5399		95-6150	
Parameter	Units	MDL	95-5441			
Benzene	µg/L	1	<1	<1	<1	<1
Ethylbenzene	µg/L	1	<1	<1	<1	<1
Toluene	µg/L	1	<1	<1	<1	<1
Xylenes	µg/L	1	<1	<1	<1	<1

Footnotes:
 U-Not detected
 N/A-Not analyzed
 CRQL-Contract Required Quantitation Limit
 MDL-Method Detection Limit

**Table I-4. Data Summary Table: Field Blanks - Ramp Area and Motor Vehicle Maintenance Facility,
South Dakota Air National Guard, Joe Foss Field**

Sample No.	FB01	FB02	FB03	FB04	FB05	FB06
Collection Date	6/13/95	6/13/95	7/18/95	7/18/95	8/29/95	8/29/95
Depth (ft)	0	0	0	0	0	0

SOLVENTS/EPA OLM01 SOW						
Laboratory ID Number	95-5342	95-5343	95-6151	95-6152	95-7154	95-7155
Parameter	Units	CRQL				
Vinyl Chloride	µg/L	10	10U	10U	10U	10U
Chloroform	µg/L	32	10U	10U	29	31
1,1,1-Trichloroethane	µg/L	2J	34B	31B	10U	10U
Trichloroethene	µg/L	10	10U	10U	10U	10U
1,2-Dichloroethane	µg/L	10	10U	10U	10U	10U
Tetrachloroethane	µg/L	10U	10U	10U	10U	10U
Carbon tetrachloride	µg/L	10	10U	10U	10U	10U

BTEX and TPH as Gasoline/SW846						
Laboratory ID Number	95-5342	95-5343	95-6151	95-6152	95-7154	95-7155
Parameter	Units	MDL				
Benzene	µg/L	1	<1	<1	<1	<1
Ethylbenzene	µg/L	1	<1	<1	<1	<1
Toluene	µg/L	1	<1	<1	<1	<1
Xylenes	µg/L	1	<1	<1	<1	<1
TPH as Gasoline	µg/L	7	<7	<7	<7	<7

TPH as Extractable						
Laboratory ID Number	95-5342	95-5343	95-6151	95-6152	95-7154	95-7155
Parameter	Units	PQL				
TPH	mg/L	0.1	<0.1	<0.1	<0.1	<0.1

Footnotes:
 U-Not detected
 N/A-Not analyzed
 CRQL-Contract Required Quantitation Limit
 MDL-Method Detection Limit
 PQL-Practical Quantitation Limit
 J-Indicates an estimated value.
 B-Compound was detected in the associated method blank as well as in the sample.

**Table I-5. Data Summary Table: Equipment Blanks - Ramp Area and Motor Vehicle Maintenance Facility,
South Dakota Air National Guard, Joe Foss Field**

Sample No.	EB01	EB03	EB04	EB05	EB06
Collection Date	6/13/95	6/15/95	6/15/95	7/18/95	8/29/95
Depth (ft)	0	0	0	0	0

SOLVENTS/EPA OLM01 SOW					
Laboratory ID Number	Units	CRQL	95-5396	95-6155	95-7156
Vinyl Chloride	µg/L	10	N/A	10U	10U
Chloroform	µg/L	10	N/A	10U	29
1,1,1-Trichloroethane	µg/L	10	N/A	28B	10u
Trichloroethene	µg/L	10	N/A	10U	10U
1,2-Dichloroethane	µg/L	10	N/A	10U	10U
Tetrachloroethane	µg/L	10	N/A	10U	10U
Carbon tetrachloride	µg/L	10	N/A	10U	10U

BTEX and TPH as Gasoline/SW846					
Laboratory ID Number	Units	MDL	95-5395	95-6155	95-7156
Benzene	µg/L	1	<1	<1	<1
Ethylbenzene	µg/L	1	<1	<1	<1
Toluene	µg/L	1	<1	<1	<1
Xylenes	µg/L	1	<1	<1	<1
TPH as Gasoline	µg/L	7	<7	<7	<7

TPH as Extractable					
Laboratory ID Number	Units	PQL	95-5391	95-6155	95-7156
TPH	mg/L	0.1	<0.1	<0.1	<0.1

Footnotes:
 U-Not detected
 N/A-Not analyzed
 CRQL-Contract Required Quantitation Limit
 MDL-Method Detection Limit
 PQL-Practical Quantitation Limit
 B-Compound was detected in the associated method blank as well as in the sample.

**Table I-6. Data Summary Table: Field Duplicates-Groundwater - Ramp Area and Motor Vehicle Maintenance Facility,
South Dakota Air National Guard, Joe Foss Field**

Sample No. Collection Date	GW12-6 6/15/95	GW12-8 6/15/95	MW1-13-01 7/18/95	MW2-13-1 7/18/95	MW1-13-02 8/29/95	MW2-13-02 8/29/95
SOLVENTS/IEPA OLMO1 SOW						
Laboratory ID Number	N/A	N/A	95-6153	95-6154	95-7158	95-7159
Parameter	Units	CRQL				
Vinyl Chloride	µg/L	10	10U	10U	10U	10U
Chloroform	µg/L	10	N/A	10U	10U	10U
1,1,1-Trichloroethane	µg/L	10	N/A	10U	10U	10U
Trichloroethene	µg/L	10	N/A	10U	10U	10U
1,2-Dichloroethane	µg/L	10	N/A	10U	10U	10U
Tetrachloroethane	µg/L	10	N/A	10U	10U	10U
Carbon tetrachloride	µg/L	10	N/A	10U	10U	10U
BTEX and TPH as Gasoline/SW648						
Laboratory ID Number	95-5397	95-5398	95-6153	95-6154	95-7158	95-7159
Parameter	Units	MDL				
Benzene	µg/L	1	<1	<1	<1	<1
Ethylbenzene	µg/L	1	<1	<1	<1	<1
Toluene	µg/L	1	<1	<1	<1	<1
Xylenes	µg/L	1	<1	<1	<1	<1
TPH as Gasoline	µg/L	7	<7	<7	<7	<7
TPH as Extractable						
Laboratory ID Number	95-5397	95-5398	95-6153	95-6154	95-7158	95-7159
Parameter	Units	MDL				
TPH	mg/L	0.1	1	<0.1	<0.1	<0.1

Footnotes:
 U-Not detected
 N/A-Not analyzed
 CRQL-Contract Required Quantitation Limit
 MDL-Method Detection Limit

Table I-8. Volatile Organic Compounds (Solvents) Analysis, South Dakota Air National Guard, Joe Foss Field
Data Review and Validation

Field Sample Number	EPA Sample No.	Matrix	Sampling Date	Solvents Analysis Date*	Solvents Tuning/Mass Calibration	Initial Calibration	Continuing Calibration	Surrogate Recoveries	Solvents Method Blank
SDG No. 955480									
VBLK3476	NA	SO	NA	6/21/95	All BFB tuning and mass calibration criteria within control limits. 5 tunes applied.	6/21/95 (Instr ID: 59702E) Daily tune in control All RRF 0.05 %RSD<30.	6/22/95 (Instr ID: 59702E) Daily tune in control All RRF 0.05 %D<±25.	All surrogate recoveries within the control limits.	No solvents detected.
VBLK3477	NA	WA	NA	6/22/95					
VBLK3478	NA	SO	NA	6/22/95			6/21/95 (Instr ID: 59704G) Daily tune in control All RRF 0.05 %D<±25.		
EB04	95-5396	WA	6/15/95	6/22/95		5/31/95 (Instr ID: 59704G) Daily tune in control All RRF 0.05 %RSD<30.	6/22/95 (Instr ID: 59704G) Daily tune in control All RRF 0.05 %D<±25.		
TB03	95-5399	WA	6/15/95	6/22/95					
GS-13-1-1	95-5480	SO	6/15/95	6/21/95			6/22/95 (Instr ID: 59704G) Daily tune in control All RRF 0.05 %D<±25.		
GS-13-1-1MS	95-5480MS	SO	6/15/95	6/21/95					
GS-13-1-1MSD	95-5480MSD	SO	6/15/95	6/22/95					
GS13-1-4	95-5481	SO	6/15/95	6/21/95					
GS13-2-1	95-5482	SO	6/15/95	6/21/95					
GS13-2-4	95-5483	SO	6/15/95	6/21/95					
GS13-3-1	95-5484	SO	6/15/95	6/21/95					
GS13-3-4	95-5485	SO	6/15/95	6/21/95					
GS13-4-2	95-5486	SO	6/15/95	6/21/95					
GS13-4-4	95-5487	SO	6/15/95	6/21/95					
GS13-4-5	95-5488	SO	6/15/95	6/21/95					
SDG No. FB01									
VBLK3475	NA	WA	NA	6/16/95	All BFB tuning and mass calibration criteria within control limits. 1 tune applied.	6/21/95 (Instr ID: 59702E) Daily tune in control All RRF 0.05 %RSD<30.	6/21/95 (Instr ID: 59702E) Daily tune in control All RRF 0.05 %D<±25.	All surrogate recoveries within the control limits.	No solvents detected.
TB0-2	95-5341	WA	6/13/95	6/16/95					
FB01	95-5342	WA	6/13/95	6/16/95					
FB02	95-5343	WA	6/13/95	6/16/95					
VBLK3500	VBLK3500	WA	NA	7/25/95	All BFB tuning and mass calibration criteria within control limits. 3 tunes applied.	7/25/95 (Instr ID: 59704G) Daily tune in control All RRF 0.05 %RSD<30.	7/25/95 (Instr ID: 59704G) Daily tune in control All RRF 0.05 %D<±25.	All surrogate recoveries within the control limits.	Chloroform detected (2B.J).
TB05	95-6150	WA	7/18/95	7/25/95					
FB03	95-6151	WA	7/18/95	7/25/95					

Table I-8. Volatile Organic Compounds (Solvents) Analysis, South Dakota Air National Guard, Joe Foss Field
Data Review and Validation (Continued)

Field Sample Number	EPA Sample No.	Matrix	Internal Standards	VOC LCS Results	MS/MSD Analysis	Associated QC Blanks	Tentatively Identified Compounds (TIC)	Flag Codes Applied by SAIC
SDG No. 955480								
VBLK3476	NA	SO	BCM, DBF, CHL. All areas and retention times were within control limits.	All percent recoveries within the control limits.	All recoveries and RPDs were within the control limits.	NA	TIC=0	None Applied
VBLK3477	NA	WA				NA	TIC=0	None Applied
VBLK3478	NA	SO				NA	TIC=0	None Applied
EB04	95-5396	WA				NA	TIC=0	None Applied
TB03	95-5399	WA				NA	TIC=0	None Applied
GS-13-1-1	95-5480	SO				EB04/TB03/FB01/FB02	TIC=0	None Applied
GS-13-1-1MS	95-5480MS	SO				EB04/TB03/FB01/FB02	TIC=0	None Applied
GS-13-1-1MSD	95-5480MSD	SO				EB04/TB03/FB01/FB02	TIC=0	None Applied
GS13-1-4	95-5481	SO				EB04/TB03/FB01/FB02	TIC=0	None Applied
GS13-2-1	95-5482	SO				EB04/TB03/FB01/FB02	TIC=0	None Applied
GS13-2-4	95-5483	SO				EB04/TB03/FB01/FB02	TIC=0	None Applied
GS13-3-1	95-5484	SO				EB04/TB03/FB01/FB02	TIC=0	None Applied
GS13-3-4	95-5485	SO				EB04/TB03/FB01/FB02	TIC=0	None Applied
GS13-4-2	95-5486	SO				EB04/TB03/FB01/FB02	TIC=0	None Applied
GS13-4-4	95-5487	SO				EB04/TB03/FB01/FB02	TIC=0	None Applied
GS13-4-5	95-5488	SO				EB04/TB03/FB01/FB02	TIC=0	None Applied
SDG No. FB01								
VBLK3475	NA	WA	BCM, DBF, CHL. All areas and retention times were within control limits.	All percent recoveries within the control limits.	QC Blanks	NA	TIC=1	None Applied
TB0-2	95-5341	WA			No MS/MSD analyses were requested.	NA	TIC=5	None Applied
FB01	95-5342	WA				NA	TIC=6	None Applied
FB02	95-5343	WA				NA	TIC=1	None Applied
VBLK3500	VBLK3500	WA	BCM, DBF, CHL. All areas and retention times were within control limits.	All percent recoveries within the control limits.	MS/MSD analyses were performed on TB05.	NA	TIC=0	None Applied
TB05	95-6150	WA				NA	TIC=0	None Applied
FB03	95-6151	WA				NA	TIC=0	None Applied

Footnotes to Table I-8. Solvents Analysis, South Dakota Air National Guard, Joe Foss Field Data Review and Validation

[illegible]

Table I-10. Solvents Analysis Surrogate Recovery QC Summary: Water
South Dakota National Guard, Joe Foss Field, Sioux Falls, South Dakota

Solvents Surrogates	Total Number Analyses*	Percent Recovery Range	Percent Recovery Control Limits	Number Within Control Limits	Number Outside Control Limits
d4-1,2-Dichloroethane	21	85-105	76-114	21	0
d8-Toluene	21	93-110	88-110	21	0
4-Bromofluorobenzene	21	89-108	86-115	21	0
* Groundwater Environmental Samples, Trip Blanks, Field Blanks, Equipment Blanks, and Method Blanks.					

Table I-12. BTEX and TPH as Gasoline Analyses, South Dakota Air National, Guard, Joe Foss Field
Data Review and Validation

Sample Number	EPA Sample No.	Matrix	Sampling Date	Analysis Date*	Initial Calibration	Continuing Calibration	Surrogate Recoveries
BTEX and TPH as Gasoline							
Method blank	Method blank	SO	NA	6/14/95	Calibration date: 3/18/1995 Calibration curve model type: linear.	%R within the control limits (85-115).	All %R were within the control limits.
Method blank	Method blank	SO	NA	6/15/95			
Method blank	Method blank	SO	NA	6/16/95			
Method blank	Method blank	W/A	NA	6/19/95			
Method blank	Method blank	SO	NA	6/20/95			
Method blank	Method blank	SO	NA	6/21/95			
Method blank	Method blank	SO	NA	6/22/95			
Method blank	Method blank	SO	NA	6/23/95			
GS01-1	95-5329	SO	6/13/95	6/14/95			
GS01-3	95-5330	SO	6/13/95	6/15/95			
GS2-1	95-5331	SO	6/13/95	6/15/95			
GS02-3	95-5332	SO	6/13/95	6/15/95			
GS03-1	95-5333	SO	6/13/95	6/15/95			
GS03-3	95-5334	SO	6/13/95	6/15/95			
GS03-3	95-5334MS	SO	6/13/95	6/15/95			
GS03-3	95-5334MSD	SO	6/13/95	6/15/95			
GS04-1	95-5335	SO	6/13/95	6/16/95			
GS04-3	95-5336	SO	6/13/95	6/16/95			
GS05-2	95-5337	SO	6/13/95	6/16/95			
GS05-2	95-5337MS	SO	6/13/95	6/16/95			
GS05-2	95-5337MSD	SO	6/13/95	6/16/95			
GS05-3	95-5338	SO	6/13/95	6/21/95			

Table I-12. BTEX and TPH as Gasoline Analyses, South Dakota Air National, Guard, Joe Foss Field
Data Review and Validation (Continued)

Sample Number	EPA Sample No.	Matrix	BTEX Method Blank	BTEX and TPH LCS Results	MS/MSD Analysis	Associated QC Blanks	Flag Codes Applied by SAIC
BTEX and TPH as Gasoline							
Method blank	Method blank	SO	No BTEX and TPH were detected at the concentration greater than the MDL.	LCS recovery was within the control limits (80-120).	All recoveries and relative percent differences were within the control limits.	NA	None Applied
Method blank	Method blank	SO				NA	None Applied
Method blank	Method blank	SO				NA	None Applied
Method blank	Method blank	WA				NA	None Applied
Method blank	Method blank	SO				NA	None Applied
Method blank	Method blank	SO				NA	None Applied
Method blank	Method blank	SO				NA	None Applied
Method blank	Method blank	SO				NA	None Applied
Method blank	Method blank	SO				NA	None Applied
Method blank	Method blank	SO				NA	None Applied
GS01-1	95-5329	SO				FB01, FB02/EB01/TB01	None Applied
GS01-3	95-5330	SO				FB01, FB02/EB01/TB01	None Applied
GS2-1	95-5331	SO				FB01, FB02/EB01/TB01	None Applied
GS02-3	95-5332	SO				FB01, FB02/EB01/TB01	None Applied
GS03-1	95-5333	SO				FB01, FB02/EB01/TB01	None Applied
GS03-3	95-5334	SO				FB01, FB02/EB01/TB01	None Applied
GS03-3	95-5334MS	SO				FB01, FB02/EB01/TB01	None Applied
GS03-3	95-5334MSD	SO				FB01, FB02/EB01/TB01	None Applied
GS04-1	95-5335	SO				FB01, FB02/EB01/TB01	None Applied
GS04-3	95-5336	SO				FB01, FB02/EB01/TB01	None Applied
GS05-2	95-5337	SO				FB01, FB02/EB01/TB01	None Applied
GS05-2	95-5337MS	SO				FB01, FB02/EB01/TB01	None Applied
GS05-2	95-5337MSD	SO				FB01, FB02/EB01/TB01	None Applied
GS05-3	95-5338	SO				FB01, FB02/EB01/TB01	None Applied

Table I-12. BTEX and TPH as Gasoline Analyses, South Dakota Air National, Guard, Joe Foss Field
Data Review and Validation

Sample Number	EPA Sample No.	Matrix	Sampling Date	Analysis Date*	Initial Calibration	Continuing Calibration	Surrogate Recoveries
GS06-2	95-5339	SO	6/13/95	6/21/95			
TB-01	95-5340	WA	6/13/95	6/16/95			
TB0-2	95-5341	WA	6/13/95	6/19/95			
FB01	95-5342	WA	6/13/95	6/19/95			
FB02	95-5343	WA	6/13/95	6/19/95			
EB01	95-5344	WA	6/13/95	6/16/95			
EB03	95-5395	WA	6/15/95	6/16/95			
EB04	95-5396	WA	6/15/95	6/16/95			
GW12-5	95-5397	WA	6/15/95	6/16/95			
GW12-6	95-5398	WA	6/15/95	6/17/95			
TB03	95-5399	WA	6/15/95	6/17/95			
GS-13-1-1	95-5480	SO	6/15/95	6/20/95			
GS13-1-4	95-5481	SO	6/15/95	6/20/95			
GS13-1-4	95-5481MS	SO	6/15/95	6/20/95			
GS13-1-4	95-5481MSD	SO	6/15/95	6/20/95			
GS13-2-1	95-5482	SO	6/15/95	6/22/95			
GS13-2-4	95-5483	SO	6/15/95	6/22/95			
GS13-3-1	95-5484	SO	6/15/95	6/22/95			
GS13-3-4	95-5485	SO	6/13/95	6/22/95			
GS13-4-2	95-5486	SO	6/13/95	6/22/95			
GS13-4-4	95-5487	SO	6/13/95	6/23/95			
GS13-4-5	95-5488	SO	6/13/95	6/23/95			
GW12-1	95-5438	WA	6/16/95	6/19/95			
GW12-2	95-5439	WA	6/16/95	6/19/95			

Table I-12. BTEX and TPH as Gasoline Analyses, South Dakota Air National, Guard, Joe Foss Field
Data Review and Validation (Continued)

Sample Number	EPA Sample No.	Matrix	BTEX Method Blank	BTEX and TPH LCS Results	MS/MSD Analysis	Associated QC Blanks	Flag Codes Applied by SAIC
GS06-2	95-5339	SO				FB01, FB02/EB01/TB01	None Applied
TB01	95-5340	WA				FB01, FB02/EB01/TB01	None Applied
TB0-2	95-5341	WA				NA	None Applied
FB01	95-5342	WA				NA	None Applied
FB02	95-5343	WA				NA	None Applied
EB01	95-5344	WA				NA	None Applied
EB03	95-5395	WA				NA	None Applied
EB04	95-5396	WA				NA	None Applied
GW12-5	95-5397	WA				FB01, FB02/EB03/TB03	None Applied
GW12-6	95-5398	WA				FB01, FB02/EB03/TB03	None Applied
TB03	95-5399	WA				NA	None Applied
GS13-1-1	95-5480	SO				FB01, FB02/EB03/TB03	None Applied
GS13-1-4	95-5481	SO				FB01, FB02/EB04/TB03	None Applied
GS13-1-4	95-5481MS	SO				FB01, FB02/EB04/TB03	None Applied
GS13-1-4	95-5481MSD	SO				FB01, FB02/EB04/TB03	None Applied
GS13-2-1	95-5482	SO				FB01, FB02/EB04/TB03	None Applied
GS13-2-4	95-5483	SO				FB01, FB02/EB04/TB03	None Applied
GS13-3-1	95-5484	SO				FB01, FB02/EB04/TB03	None Applied
GS13-3-4	95-5485	SO				FB01, FB02/EB01/TB01	None Applied
GS13-4-2	95-5486	SO				FB01, FB02/EB01/TB01	None Applied
GS13-4-4	95-5487	SO				FB01, FB02/EB01/TB01	None Applied
GS13-4-5	95-5488	SO				FB01, FB02/EB01/TB01	None Applied
GW12-1	95-5438	WA				FB01, FB02/EB03/TB04	None Applied
GW12-2	95-5439	WA				FB01, FB02/EB03/TB04	None Applied

Table I-12. BTEX and TPH as Gasoline Analyses, South Dakota Air National, Guard, Joe Foss Field
Data Review and Validation

Sample Number	EPA Sample No.	Matrix	Sampling Date	Analysis Date*	Initial Calibration	Continuing Calibration	Surrogate Recoveries
GW12-03	95-5440	WA	6/16/95	6/19/95			
TB04	95-5441	WA	6/16/95	6/19/95			
GW12-4	95-5442	WA	6/16/95	6/20/95			
Method Blank	Method Blank	WA	NA	7/29/95	Calibration date: 6/6/1995 Calibration curve model type: linear.	%R within the control limits (85-115).	All %R were within the control limits.
TB05	95-6150	WA	7/18/95	7/29/95			
FB03	95-6151	WA	7/18/95	7/29/95			
FB04	95-6152	WA	7/18/95	7/29/95			
MW1-13-01	95-6153	WA	7/18/95	7/29/95			
MW2-13-1	95-6154	WA	7/18/95	7/29/95			
MW2-13-1MS	95-6154MS	WA	7/18/95	7/29/95			
MW2-13-1MSD	95-6154MSD	WA	7/18/95	7/29/95			
EB05	95-6155	WA	7/18/95	7/29/95			
MW2-12-1	95-6156	WA	7/18/95	7/29/95			
MW6-12-1	95-6157	WA	7/18/95	7/29/95			
MW3-12-01	95-6158	WA	7/18/95	7/29/95			
MW4-12-01	95-6159	WA	7/18/95	7/29/95			
MW5-12-01	95-6160	WA	7/18/95	7/29/95			
MW1-12-01	95-6161	WA	7/18/95	7/29/95			
Method Blank	Method Blank	WA	NA	9/7/95	Calibration date: 6/6/1995 Calibration curve model type: linear.	%R within the control limits (85-115).	All %R were within the control limits.
FB05	95-7154	WA	8/29/95	9/7/95			
FB06	95-7155	WA	8/29/95	9/7/95			
EB06	95-7156	WA	8/29/95	9/7/95			
TB06	95-7157	WA	8/29/95	9/7/95			

Table I-12. BTEX and TPH as Gasoline Analyses, South Dakota Air National, Guard, Joe Foss Field
Data Review and Validation (Continued)

Sample Number	EPA Sample No.	Matrix	BTEX Method Blank	BTEX and TPH LCS Results	MS/MSD Analysis	Associated QC Blanks	Flag Codes Applied by SAIC
GW12-03	95-5440	WA				FB01, FB02/EB03/TB04	None Applied
TB04	95-5441	WA				NA	None Applied
GW12-4	95-5442	WA				FB01, FB02/EB03/TB04	None Applied
Method Blank	Method Blank	WA	No BTEX and TPH were detected at the concentration greater than the MDL.	LCS recovery was within the control limits (80-120).	All recoveries and relative percent differences were within the control limits.	NA	None Applied
TB05	95-6150	WA				NA	None Applied
FB03	95-6151	WA				NA	None Applied
FB04	95-6152	WA				NA	None Applied
MW1-13-01	95-6153	WA				FB03, FB04/EB05/TB05	None Applied
MW2-13-1	95-6154	WA				FB03, FB04/EB05/TB05	None Applied
MW2-13-1MS	95-6154MS	WA					
MW2-13-1MSD	95-6154MSD	WA					
EB05	95-6155	WA				NA	None Applied
MW2-12-1	95-6156	WA				FB03, FB04/EB05/TB05	None Applied
MW6-12-1	95-6157	WA				FB03, FB04/EB05/TB05	None Applied
MW3-12-01	95-6158	WA				FB03, FB04/EB05/TB05	None Applied
MW4-12-01	95-6159	WA				FB03, FB04/EB05/TB05	None Applied
MW5-12-01	95-6160	WA				FB03, FB04/EB05/TB05	None Applied
MW1-12-01	95-6161	WA				FB03, FB04/EB05/TB05	None Applied
Method Blank	Method Blank	WA	No BTEX and TPH were detected at the concentration greater than the MDL.	LCS recovery was within the control limits (80-120).	All recoveries and relative percent differences were within the control limits.	NA	None Applied
FB05	95-7154	WA				NA	None Applied
FB06	95-7155	WA				NA	None Applied
EB06	95-7156	WA				NA	None Applied
TB06	95-7157	WA				NA	None Applied

[illegible]

Table I-14. BTEX and TPH as Gasoline Analyses Surrogate Recovery QC Summary: Water
South Dakota National Guard, Joe Foss Field, Sioux Falls, South Dakota

Solvents Surrogates	Total Number Analyses*	Percent Recovery Range	Percent Recovery Control Limits	Number Within Control Limits	Number Outside Control Limits
Trifluorotoluene	46	92-110	86.8-110.9	46	0
* Groundwater Environmental Samples, MS/MSD Samples, Trip Blanks, Field Blanks, Equipment Blanks,					
and Method Blanks.					

Table I-16. BTEX and TPH as Gasoline MS/MSD QC Summary: Groundwater South Dakota National Guard, Joe Foss Field, Sioux Falls, South Dakota

[illegible]

Table I-17. Total Petroleum Hydrocarbons Analysis, South Dakota Air National Guard
Joe Foss Field, Sioux Falls, South Dakota, Data Review and Validation

Site ID	Field Sample Number	Matrix	Sampling Date	TPH Analysis Date	Initial Calibration	Calibration Standard (CS)	Method
TPH as Extractable							
BL-43084-1	NA	SO	NA	6/28/95	Calibration date: 6/19/1995 Calibration curve model type: linear.	%R within the control limits (85-115).	No TPH were detected at the concentration greater than the MDL.
GS-13-1-1	95-5480	SO	6/15/95	6/28/95			
GS-13-1-1MS	95-5480MS	SO	6/15/95	6/28/95			
GS-13-1-1MSD	95-5480MSD	SO	6/15/95	6/28/95			
GS13-1-4	95-5481	SO	6/15/95	6/28/95			
GS13-2-1	95-5482	SO	6/15/95	6/28/95			
GS13-2-4	95-5483	SO	6/15/95	6/28/95			
GS13-3-1	95-5484	SO	6/15/95	6/28/95			
GS13-3-4	95-5485	SO	6/15/95	6/28/95			
GS13-4-2	95-5486	SO	6/15/95	6/28/95			
GS13-4-4	95-5487	SO	6/15/95	6/28/95			
GS13-4-5	95-5488	SO	6/15/95	6/28/95			
FB01	95-5342	WA	6/13/95	6/22/95			
FB02	95-5343	WA	6/13/95	6/22/95			
EB01	95-5344	WA	6/13/95	6/22/95			
GS01-1	95-5329	SO	6/13/95	6/22/95			
GS01-1	95-5329MS	SO	6/13/95	6/22/95			
GS01-1	95-5329MSD	SO	6/13/95	6/22/95			
GS01-3	95-5330	SO	6/13/95	6/22/95			
GS02-1	95-5331	SO	6/13/95	6/22/95			
GS02-3	95-5332	SO	6/13/95	6/22/95			
GS03-1	95-5333	SO	6/13/95	6/22/95			
GS03-3	95-5334	SO	6/13/95	6/22/95			
GS04-1	95-5335	SO	6/13/95	6/22/95			
GS04-3	95-5336	SO	6/13/95	6/22/95			

Table I-17. Total Petroleum Hydrocarbons Analysis, South Dakota Air National Guard
Joe Foss Field, Sioux Falls, South Dakota, Data Review and Validation

Site ID	Field Sample Number	Matrix	Sampling Date	Surrogate Recoveries	Laboratory Control Sample (LCS)	Matrix Spike/ Matrix Spike Duplicate	Associated Field Blank/ Equipment Blank	Data Validation Flags Applied by SAIC
TPH as Extractable								
BL-43084-1	NA	SO	NA	All %R were within the control limits.	LCS recovery was within the control limits (80-120).	All recoveries were within the control limits, except: %R = 136 in GS01-1MSD	NA	None Applied
GS-13-1-1	95-5480	SO	6/15/95			%R = 131 in GS13-1-1MS.	FB01, FB02/EB04	None Applied
GS-13-1-1MS	95-5480MS	SO	6/15/95				FB01, FB02/EB04	None Applied
GS-13-1-1MSD	95-5480MSD	SO	6/15/95				FB01, FB02/EB04	None Applied
GS13-1-4	95-5481	SO	6/15/95				FB01, FB02/EB04	None Applied
GS13-2-1	95-5482	SO	6/15/95				FB01, FB02/EB04	None Applied
GS13-2-4	95-5483	SO	6/15/95				FB01, FB02/EB04	None Applied
GS13-3-1	95-5484	SO	6/15/95				FB01, FB02/EB04	None Applied
GS13-3-4	95-5485	SO	6/15/95				FB01, FB02/EB04	None Applied
GS13-4-2	95-5486	SO	6/15/95				FB01, FB02/EB04	None Applied
GS13-4-4	95-5487	SO	6/15/95				FB01, FB02/EB04	None Applied
GS13-4-5	95-5488	SO	6/15/95				FB01, FB02/EB04	None Applied
FB01	95-5342	WA	6/13/95				NA	None Applied
FB02	95-5343	WA	6/13/95				NA	None Applied
EB01	95-5344	WA	6/13/95				NA	None Applied
GS01-1	95-5329	SO	6/13/95				FB01, FB02/EB01	None Applied
GS01-1	95-5329MS	SO	6/13/95				FB01, FB02/EB01	None Applied
GS01-1	95-5329MSD	SO	6/13/95				FB01, FB02/EB01	None Applied
GS01-3	95-5330	SO	6/13/95				FB01, FB02/EB01	None Applied
GS02-1	95-5331	SO	6/13/95				FB01, FB02/EB01	None Applied
GS02-3	95-5332	SO	6/13/95				FB01, FB02/EB01	None Applied
GS03-1	95-5333	SO	6/13/95				FB01, FB02/EB01	None Applied
GS03-3	95-5334	SO	6/13/95				FB01, FB02/EB01	None Applied
GS04-1	95-5335	SO	6/13/95				FB01, FB02/EB01	None Applied
GS04-3	95-5336	SO	6/13/95				FB01, FB02/EB01	None Applied

Table I-17. Total Petroleum Hydrocarbons Analysis, South Dakota Air National Guard
Joe Foss Field, Sioux Falls, South Dakota, Data Review and Validation

Site ID	Field Sample Number	Matrix	Sampling Date	TPH Analysis Date	Initial Calibration	Calibration Standard (CS)	Method Blank
GS05-2	95-5337	SO	6/13/95	6/22/95			
GS05-3	95-5338	SO	6/13/95	6/22/95			
GS06-2	95-5339	SO	6/13/95	6/22/95			
EB03	95-5395	WA	6/15/95	6/21/95			
EB04	95-5396	WA	6/15/95	6/21/95			
GW12-5	95-5397	WA	6/15/95	6/21/95			
GW12-6	95-5398	WA	6/15/95	6/21/95			
GW12-1	95-5438	WA	6/16/95	6/21/95			
GW12-2	95-5439	WA	6/16/95	6/21/95			
GW12-03	95-5440	WA	6/16/95	6/21/95			
GW12-4	95-5442	WA	6/16/95	6/21/95			
Method Blank	Method Blank	WA	NA	7/26/95	Calibration date: 6/19/1995 Calibration curve model type: linear.	%R within the control limits (85-115).	No TPH were detected at the concentration greater than the MDL.
FB03	95-6151	WA	7/18/95	7/26/95			
FB04	95-6152	WA	7/18/95	7/26/95			
MW1-13-01	95-6153	WA	7/18/95	7/26/95			
MW2-13-1	95-6154	WA	7/18/95	7/26/95			
EB05	95-6155	WA	7/18/95	7/26/95			
MW2-12-1	95-6156	WA	7/18/95	7/26/95			
MW2-12-1	95-6157	WA	7/18/95	7/26/95			
MW3-12-01	95-6158	WA	7/18/95	7/26/95			
MW4-12-01	95-6159	WA	7/18/95	7/26/95			
MW5-12-01	95-6160	WA	7/18/95	7/26/95			
MW1-12-01	95-6161	WA	7/18/95	7/26/95			
Method Blank	Method Blank	WA	NA	9/1/95	Calibration date: 8/19/1995 Calibration curve model type: linear.	%R within the control limits (85-115).	No TPH were detected at the concentration greater than the MDL.
FB05	95-7154	WA	8/29/95	9/1/95			

Table I-17. Total Petroleum Hydrocarbons Analysis, South Dakota Air National Guard
Joe Foss Field, Sioux Falls, South Dakota, Data Review and Validation

Site ID	Field Sample Number	Matrix	Sampling Date	Surrogate Recoveries	Laboratory Control Sample (LCS)	Matrix Spike/ Matrix Spike Duplicate	Associated Field Blank/ Equipment Blank	Data Validation Flags Applied by SAIC
GS05-2	95-5337	SO	6/13/95				FB01, FB02/EB01	None Applied
GS05-3	95-5338	SO	6/13/95				FB01, FB02/EB01	None Applied
GS06-2	95-5339	SO	6/13/95				FB01, FB02/EB01	None Applied
EB03	95-5395	WA	6/15/95				NA	None Applied
EB04	95-5396	WA	6/15/95				NA	None Applied
GW12-5	95-5397	WA	6/15/95				FB01, FB02/EB03	None Applied
GW12-6	95-5398	WA	6/15/95				FB01, FB02/EB03	None Applied
GW12-1	95-5438	WA	6/16/95				FB01, FB02/EB03	None Applied
GW12-2	95-5439	WA	6/16/95				FB01, FB02/EB03	None Applied
GW12-03	95-5440	WA	6/16/95				FB01, FB02/EB03	None Applied
GW12-4	95-5442	WA	6/16/95				FB01, FB02/EB03	None Applied
Method Blank	Method Blank	WA	NA	All %R were within the control limits.	LCS recovery was within the control limits (80-120).	MS/MSD analyses were performed on TB05.	NA	None Applied
FB03	95-6151	WA	7/18/95				NA	None Applied
FB04	95-6152	WA	7/18/95				NA	None Applied
MW1-13-01	95-6153	WA	7/18/95				FB03, FB04/EB05	None Applied
MW2-13-1	95-6154	WA	7/18/95				FB03, FB04/EB05	None Applied
EB05	95-6155	WA	7/18/95				NA	None Applied
MW2-12-1	95-6156	WA	7/18/95				FB03, FB04/EB05	None Applied
MW2-12-1	95-6157	WA	7/18/95				FB03, FB04/EB05	None Applied
MW3-12-01	95-6158	WA	7/18/95				FB03, FB04/EB05	None Applied
MW4-12-01	95-6159	WA	7/18/95				FB03, FB04/EB05	None Applied
MW5-12-01	95-6160	WA	7/18/95				FB03, FB04/EB05	None Applied
MW1-12-01	95-6161	WA	7/18/95				FB03, FB04/EB05	None Applied
Method Blank	Method Blank	WA	NA	All %R were within the control limits.	LCS recovery was within the control limits (80-120).	MS/MSD analyses were performed on MW2-12-02.	NA	None Applied
FB05	95-7154	WA	8/29/95			All percent recoveries and difference were within the	NA	None Applied

[illegible]

Table I-19. Total Petroleum Hydrocarbons as Extractables Surrogate Recovery QC Summary: Water
South Dakota National Guard, Joe Foss Field, Sioux Falls, South Dakota

TPH as Extractables Surrogate	Total Number Analyses*	Percent Recovery Range	Percent Recovery Control Limits	Number Within Control Limits	Number Outside Control Limits
Pentacosane	24	66-98	52.8-143.1	24	0
Triacontane	13	74-105	63.6-131.7	13	0
* Groundwater Environmental Samples, MS/MSD, Field Blanks, Equipment Blanks, and Method Blanks.					

Table I-20. TPH as Extractables MS/MSD QC Summary: Soil
South Dakota National Guard, Joe Foss Field, Sioux Falls, South Dakota

[illegible]

Table I-21. TPH as Extractables MS/MSD QC Summary: Water
South Dakota National Guard, Joe Foss Field, Sioux Falls, South Dakota

[illegible]

APPENDIX J. GEOTECHNICAL DATA

THIS PAGE WAS INTENTIONALLY LEFT BLANK

SIEVE ANALYSIS TESTS

PROJECT SDANG JOE FOSS FIELD DATE 7-26-95

SIoux FALLS SD

REPORTED TO SAIC ATTN: MR JANARDAN PATEL JOB NO. 95-530

SAMPLE NO.	MW12-01	MW12-02	MW12-03	MW12-04
DEPTH (ft)	14'-16'	6'-8'	10'-12'	6'-8'
CLASSIFICATION (ASTM: D 2487)				
Symbol	(SP)	(SP-SM)	(SP)	(SP-SM)
Description	SAND, medium to fine grained with a little gravel, brown	SAND WITH SILT, medium to fine grained, with a little gravel, brown	SAND, fine to medium grained, with a little gravel, brown	SAND WITH SILT, medium to fine grained, with a little gravel, brown
MECHANICAL ANALYSIS:				
Dry Weight of Total Sample (grams)	777.7	591.6	645.3	812.5
Based on Total Sample				
% Finer Than				
1"	100	100	100	100
3/4"	100	100	100	100
3/8"	100	100	96	99
# 4	95	97	95	94
# 10	77	86	90	83
# 40	38	38	50	39
# 200	1.9	6.7	3.8	5.3



twin city testing
corporation

SL-46 (80-A)

SIEVE ANALYSIS TESTS

PROJECT SDANG JOE FOSS FIELD

DATE 7-26-95

SIoux FALLS SD

REPORTED TO SAIC ATTN: MR JANARDAN PATEL

JOB NO. 95-530

SAMPLE NO.	MW12-05	MW13-01		
DEPTH (ft)	6'-8'	12'-14'		
CLASSIFICATION (ASTM: D 2487)				
Symbol	(SP-SM)	(SP-SC)		
Description	SAND WITH SILT fine grained, with a little gravel, brown	SAND WITH CLAY medium to fine grained, with gravel, brown		
MECHANICAL ANALYSIS:				
Dry Weight of Total Sample (grams)	627.4	3680.1		
Based on Total Sample				
% Finer Than				
1"	100	100		
3/4"	100	96		
3/8"	99	84		
# 4	98	71		
# 10	96	55		
# 40	78	32		
# 200	7.4	12		

SL-46 (80-A)



twin city testing
corporation

Project: SDANG JOE FOSS FIELD
SIOUX FALLS SD


Classification (ASTM:D2487) SAND, medium to fine grained, with a little gravel, brown (SP)

Reported To: SAIC ATTN: MR JANARDAN PATEL,

DEPTH: 14'-16'

GRAIN SIZE DISTRIBUTION CURVE

U.S. STANDARD SIEVE SIZES

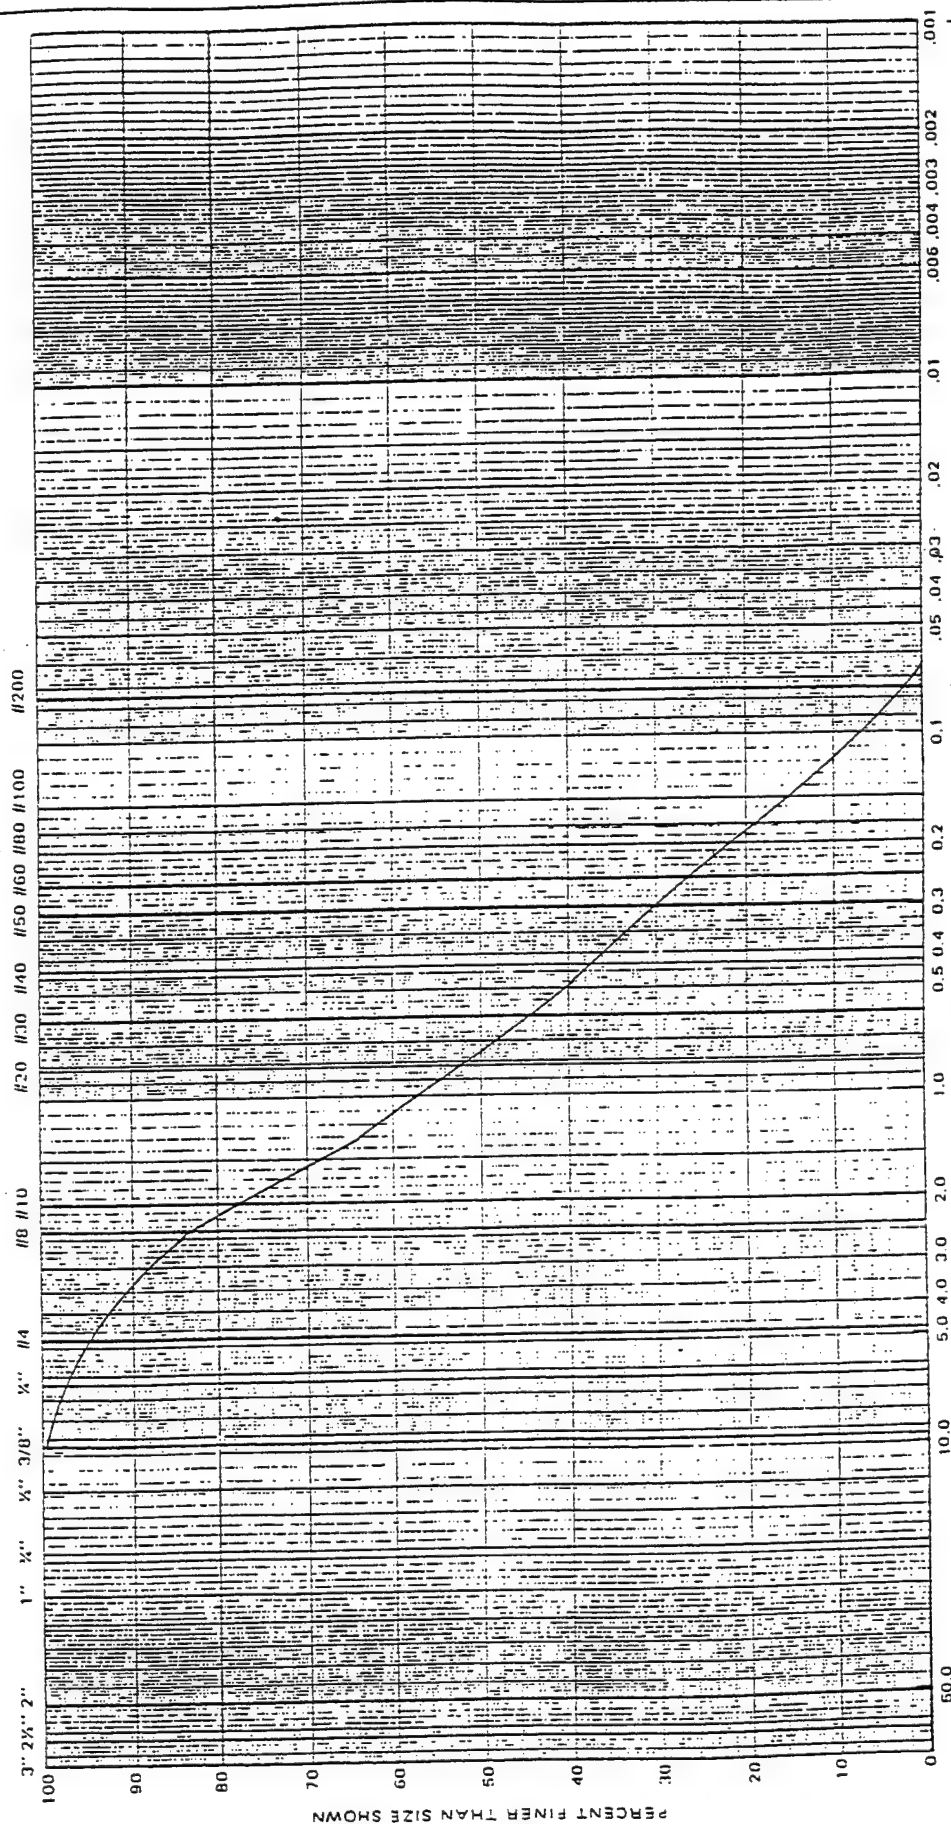

PARTICLE SIZE IN MILLIMETERS

FINES

— FINE —

MEDIUM

COARSE

3113

[illegible]

Huntingdon

Sample No. MWL2-02


Project: SDANG JOE FOSS FIELD
SIOUX FALLS SD

Classification (ASTM:D2487) SAND WITH SILT, medium to fine
grained, with a little gravel, brown (SP¹-SM)

Reported To: SAIC ATTN: MR JANARDAN PATEL

DEPTH: 6'-8' (

GRAIN SIZE DISTRIBUTION CURVE

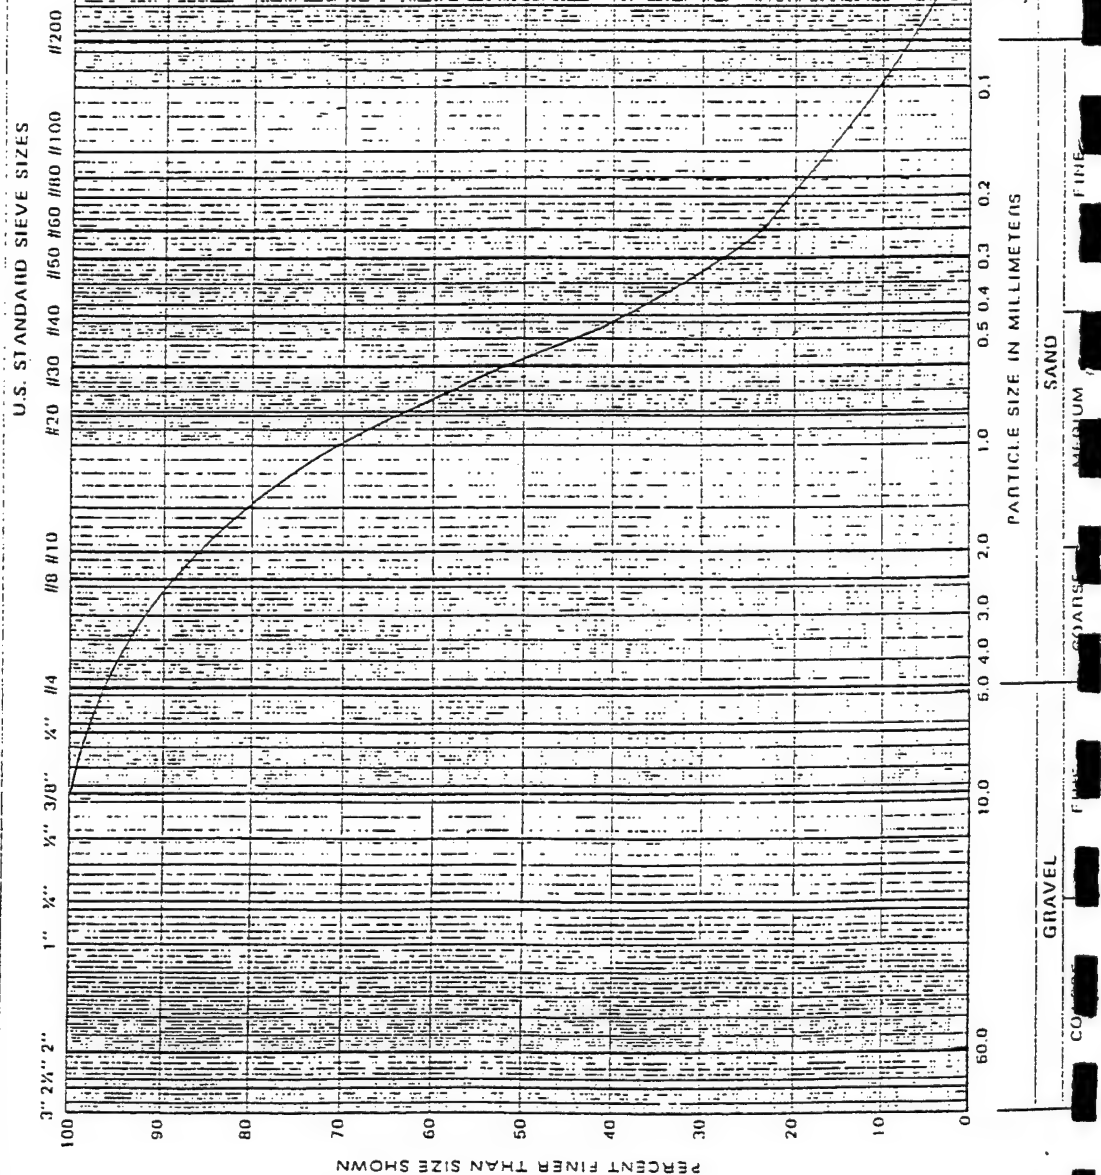

Huntingdon

Sample No. MW12-03

Project: SDANG JOE FOSS FIELD

Classification (ASTM:D2487) SAND, fine to medium grained,
with little gravel, brown (SP)

STIOUX FALLS SD

Reported To: SAIC ATTN: MR JANARDAN PATEL

DEPTH 10'-12'

GRAIN SIZE DISTRIBUTION CURVE

U.S. STANDARD SIEVE SIZES

3" 2 1/2" 2" 1 1/2" 1 1/4" 3/4" 3/8" 1/2" 1/4" 3/16" 1/8" 1/16" 1/32" 1/64" 1/128" 1/256" 1/512" 1/1024" 1/2048" 1/4096" 1/8192" 1/16384" 1/32768" 1/65536" 1/131072" 1/262144" 1/524288" 1/1048576" 1/2097152" 1/4194304" 1/8388608" 1/16777216" 1/33554432" 1/67108864" 1/134217728" 1/268435456" 1/536870912" 1/1073741824" 1/2147483648" 1/4294967296" 1/8589934592" 1/17179869184" 1/34359738368" 1/68719476736" 1/137438953472" 1/274877906944" 1/549755813888" 1/1099511627776" 1/2199023255552" 1/4398046511104" 1/8796093022208" 1/17592186044416" 1/35184372088832" 1/70368744177664" 1/140737488355328" 1/281474976710656" 1/562949953421312" 1/1125899906842624" 1/2251799813685248" 1/4503599627370496" 1/9007199254740992" 1/18014398509481984" 1/36028797018963968" 1/72057594037927936" 1/144115188075855872" 1/288230376151711744" 1/576460752303423488" 1/1152921504606846976" 1/2305843009213693952" 1/4611686018427387904" 1/9223372036854775808" 1/18446744073709551616" 1/36893488147419103232" 1/73786976294838206464" 1/147573952589676412928" 1/295147905179352825856" 1/590295810358705651712" 1/1180591620717411303424" 1/2361183241434822606848" 1/4722366482869645213696" 1/9444732965739290427392" 1/18889465931478580854784" 1/37778931862957161709568" 1/75557863725914323419136" 1/151115727451828646838272" 1/302231454903657293676544" 1/604462909807314587353088" 1/1208925819614629174706176" 1/2417851639229258349412352" 1/4835703278458516698824704" 1/9671406556917033397649408" 1/19342813113834066795298816" 1/38685626227668133590597632" 1/77371252455336267181195264" 1/154742504910672534362390528" 1/309485009821345068724781056" 1/618970019642690137449562112" 1/1237940039285380274899124224" 1/2475880078570760549798248448" 1/4951760157141521099596496896" 1/9903520314283042199192993792" 1/19807040628566084398385987584" 1/39614081257132168796771975168" 1/79228162514264337593543950336" 1/158456325028528675187087900672" 1/316912650057057350374175801344" 1/633825300114114700748351602688" 1/1267650600228229401496703205376" 1/2535301200456458802993406410752" 1/5070602400912917605986812821504" 1/10141204801825835211973625643008" 1/20282409603651670423947251286016" 1/40564819207303340847894502572032" 1/81129638414606681695789005144064" 1/162259276829213363391578010288128" 1/324518553658426726783156020576256" 1/649037107316853453566312041152512" 1/1298074214633706907132624082305024" 1/2596148429267413814265248164610048" 1/5192296858534827628530496329220096" 1/10384593717069655257060992658440192" 1/20769187434139310514121985316880384" 1/41538374868278621028243970633760768" 1/83076749736557242056487941267521536" 1/166153499473114484112975882535043072" 1/332306998946228968225951765070086144" 1/664613997892457936451903530140172288" 1/1329227995784915872903807060280344576" 1/2658455991569831745807614120560689152" 1/5316911983139663491615228241121378304" 1/10633823966279326983230456482242756608" 1/21267647932558653966460912964485513216" 1/42535295865117307932921825928971026432" 1/85070591730234615865843651857942052864" 1/170141183460469231731687303715884105728" 1/340282366920938463463374607431768211456" 1/680564733841876926926749214863536422912" 1/1361129467683753853853498429727072845824" 1/2722258935367507707706996859454145691648" 1/5444517870735015415413993718908291383296" 1/10889035741470030830827987437816582766592" 1/21778071482940061661655974875633165533184" 1/43556142965880123323311949751266331066368" 1/87112285931760246646623899502532662132736" 1/174224571863520493293247799005065324265472" 1/348449143727040986586495598010130648530944" 1/696898287454081973172991196020261297061888" 1/1393796574908163946345982392040522594123776" 1/2787593149816327892691964784081045188247552" 1/5575186299632655785383929568162090376495104" 1/11150372599265311570767859136324180752990208" 1/22300745198530623141535718272648361505980416" 1/44601490397061246283071436545296723011960832" 1/89202980794122492566142873090593446023921664" 1/178405961588244985132285746181186892047843328" 1/356811923176489970264571492362373784095686656" 1/713623846352979940529142984724747568191373312" 1/1427247692705959881058285969449495136382746624" 1/2854495385411919762116571938898990272765493248" 1/5708990770823839524233143877797980545530986496" 1/11417981541647679048466287755595961091061972992" 1/22835963083295358096932575511191922182123945984" 1/45671926166590716193865151022383844364247891968" 1/91343852333181432387730302044767688728495783936" 1/182687704666362864775460604089535377456991567872" 1/365375409332725729550921208179070754913983135744" 1/730750818665451459101842416358141509827966271488" 1/1461501637330902918203684832716283019655932542976" 1/2923003274661805836407369665432566039311865085952" 1/5846006549323611672814739330865132078623730171904" 1/11692013098647223345629478661730264157247460343808" 1/23384026197294446691258957323460528314494920687616" 1/46768052394588893382517914646921056628989841375232" 1/93536104789177786765035829293842113257979682750464" 1/187072209578355573530071658587684226515959365500928" 1/374144419156711147060143317175368453031918731001856" 1/748288838313422294120286634350736906063837462003712" 1/1496577676626844588240573268701473812127674924007424" 1/2993155353253689176481146537402947624255349848014848" 1/5986310706507378352962293074805895248510699696029696" 1/11972621413014756705924586149611790497021399392059392" 1/23945242826029513411849172299223580994042798784118784" 1/47890485652059026823698344598447161988085597568237568" 1/95780971304118053647396689196894323976171195136475136" 1/191561942608236107294793378393788647952342390272950272" 1/383123885216472214589586756787577295904684780545900544" 1/766247770432944429179173513575154591809369561091801088" 1/1532495540865888858358347027150309183618739122183602176" 1/3064991081731777716716694054300618367237478244367204352" 1/6129982163463555433433388108601236734474956488734408704" 1/12259964326927110866866776217202473468949912977468817408" 1/24519928653854221733733552434404946937899825954937634816" 1/49039857307708443467467104868809893875799651909875269632" 1/98079714615416886934934209737619787751599303819750539264" 1/196159429230833773869868419475239575503198607639501078528" 1/392318858461667547739736838950479151006397215279002157056" 1/784637716923335095479473677900958302012794430558004314112" 1/1569275433846670190958947355801916604025588861116008628224" 1/3138550867693340381917894711603833208051177722232017256448" 1/6277101735386680763835789423207666416102355444464034512896" 1/12554203470773361527671578846415332832204710888928069025792" 1/25108406941546723055343157692830665664409421777856138051584" 1/50216813883093446110686315385661331328818843555712276103168" 1/100433627766186892221372630771322662657637687111424552206336" 1/200867255532373784442745261542645325315275374222849104412672" 1/401734511064747568885490523085290650630550748445698208825344" 1/803469022129495137770981046170581301261101496891396417650688" 1/1606938044258990275541962092341162602522202993782792835301376" 1/3213876088517980551083924184682325205044405987565585670602752" 1/6427752177035961102167848369364650410088811975131171341205504" 1/12855504354071922204335696738729300820177623950262342682411008" 1/25711008708143844408671393477458601640355247900524685364822016" 1/51422017416287688817342786954917203280710495801049370729644032" 1/102844034832575377634685573909834406561420991602098741459288064" 1/205688069665150755269371147819668813122841983204197482918576128" 1/411376139330301510538742295639337626245683966408394965837152256" 1/822752278660603021077484591278675252491367932816789931674304512" 1/1645504557321206042154969182557350504982735865633579863348609024" 1/3291009114642412084309938365114701009965471731267159726697218048" 1/6582018229284824168619876730229402019930943462534319453394436096" 1/13164036458569648337239753460458804039861886925068638906788872192" 1/26328072917139296674479506920917608079723773850137277813577744384" 1/52656145834278593348959013841835216159447547700274555627155488768" 1/105312291668557186697918027683670432318895095400549111254310975536" 1/210624583337114373395836055367340864637790190801098222508621951072" 1/421249166674228746791672110734681729275580381602196445017243902144" 1/842498333348457493583344221469363458551160763204392890034487804288" 1/1684996666896914987166688442938726917102321526408785780068975608576" 1/3369993333793829974333376885877453834204643052817571560137951217152" 1/6739986667587659948666753771754907668409286105635143120275902434304" 1/13479973335175319897333507543509815336818572211270286240551804868608" 1/26959946670350639794667015087019630673637144422540572481103609737216" 1/53919893340701279589334030174039261347274288845081144962207219474432" 1/107839786681402559178668060348078522694548577690162289924414438948864" 1/215679573362805118357336120696157045389097155380324579848828877897728" 1/431359146725610236714672241392314090778194310760649159697657755795456" 1/862718293451220473429344482784628181556388621521298319395315511590912" 1/1725436586902440946858688965569256363112777243042596638790631023181824" 1/3450873173804881893717377931138512726225554486085193277581262046363648" 1/6901746347609763787434755862277025452451108972170386555162524092727296" 1/13803492695219527574869511724554050904902217944340773110325048185454592" 1/27606985390439055149739023449108101809804435888681546220650096370909184" 1/55213970780878110299478046898216203619608871777363092441300192741818368" 1/110427941561756220598956093796432407239217743554726184882600385483636736" 1/220855883123512441197912187592864814478435487109452369765200770967273472" 1/441711766247024882395824375185729628956870974218904739530401541934546944" 1/883423532494049764791648750371459257913741948437809479060803083869093888" 1/1766847064988099529583297500742918515827483896875618958121606167738187776" 1/3533694129976199059166595001485837031654967793751237916243212335476375552" 1/7067388259952398118333190002971674063309935587502475832486424670952751104" 1/14134776519904796236666380005943348126619871175004951664972849341905502208" 1/28269553039809592473332760011886696253239742350009903329945698683811004416" 1/56539106079619184946665520023773392506479484700019806659891397367622008832" 1/113078212159238369893331040047546785012958969400039613319782794735244017664" 1/226156424318476739786662080095093570025917938800079226639565589470488035328" 1/452312848636953479573324160190187140051835877600158453279131178940976070656" 1/904625697273906959146648320380374280103671755200316906558262357881952141312" 1/1809251394547813918293296640760748560207343510400633813116524715763904282624" 1/3618502789095627836586593281521497120414687020801267626233049431527808565248" 1/7237005578191255673173186563042994240829374041602535252466098863055617130496" 1/14474011156382511346346373126085988481658748083205070504932197726111234260992" 1/28948022312765022692692746252171976963317496166410141009864395452222468521984" 1/57896044625530045385385492504343953926634992332820282019728790904444937043968" 1/115792089251060090770770985008687907853269984665640564039457581808889874087936" 1/231584178502120181541541970017375815706539969331281128078915163617779748175872" 1/463168357004240363083083940034751631413079938662562256157830327235559496351744" 1/926336714008480726166167880069503262826159877325124512315660654471118992703488" 1/1852673428016961452332335760139006525652319754650249024631321308942237985406976" 1/3705346856033922904664671520278013051304639509300498049262642617884475970813952" 1/7410693712067845809329343040556026102609279018600996098525285235768951941627904" 1/14821387424135691618658686081112052205218558037201992197050570471537903883255808" 1/29642774848271383237317372162224104410437116074403984394101140943075807766511616" 1/59285549696542766474634744324448208820874232148807968788202281886151615533023232" 1/11857109939308553294926948864889641764174846429761593757640456377230323106

Huntingdon

Sample No. 1 MW12-04

Classification (ASTM:D2487) SAND WITH SILT, medium to fine
grained, with a little gravel, brown (SP-SM)


DEPTH: 6'-8'

Project: SDANG JOE FOSS FIELD

SIOUX FALLS, SD

Reported To: SAIC ATTN: MR JANARDAN PATEL

GRAIN SIZE DISTRIBUTION CURVE

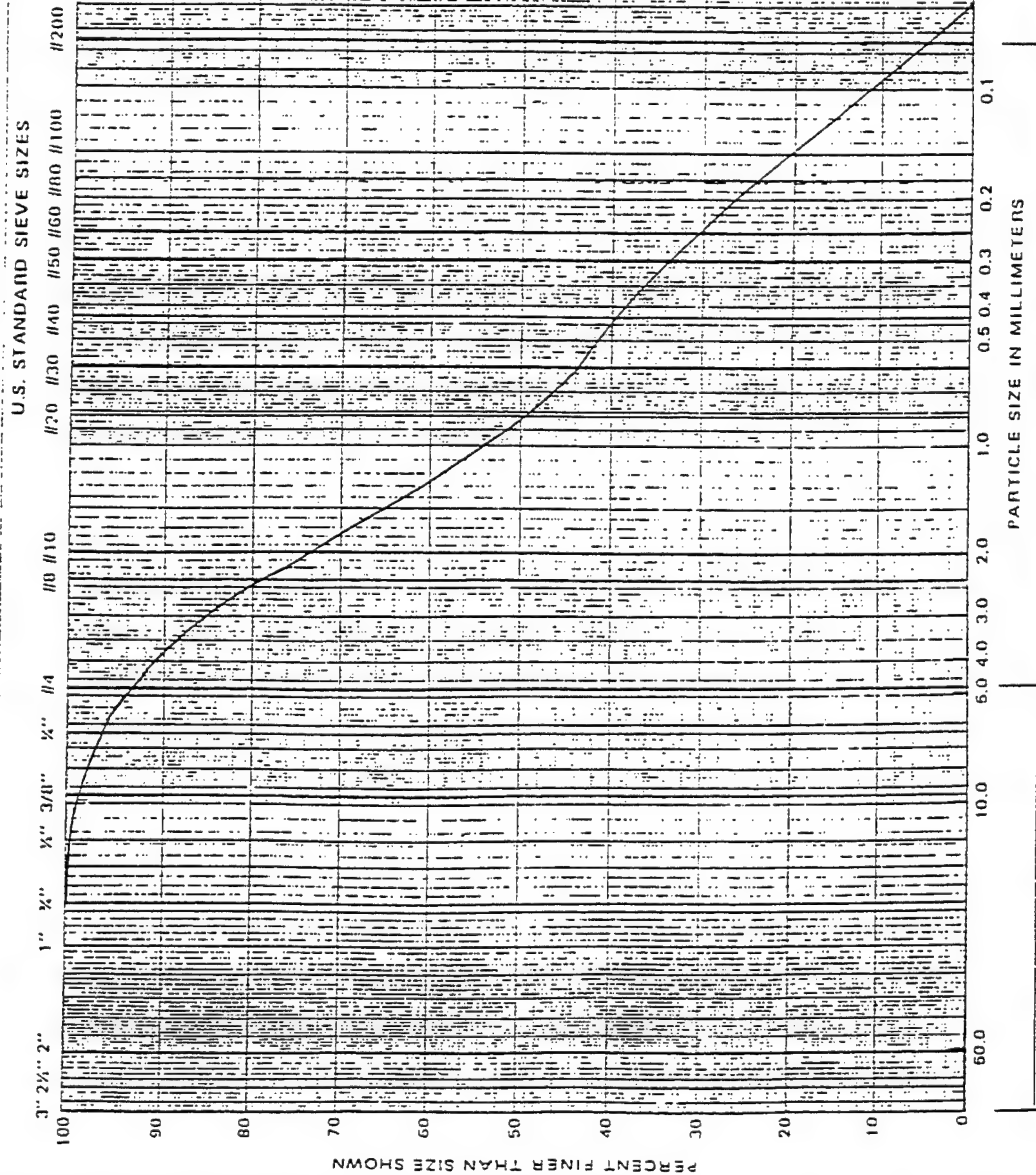

Huntingdon

Sample No. 1 MW12-05

Classification (ASTM: D2487) SAND WITH SILT,

fine grained, with a little gravel, brown (SP-SM)


DEPTH: 6'-8'

Project: SDANG JOE FOSS FIELD

SIOUX FALLS SD

Reported To: SAIC ATTN: MR JANARDAN PATEL

GRAIN SIZE DISTRIBUTION CURVE

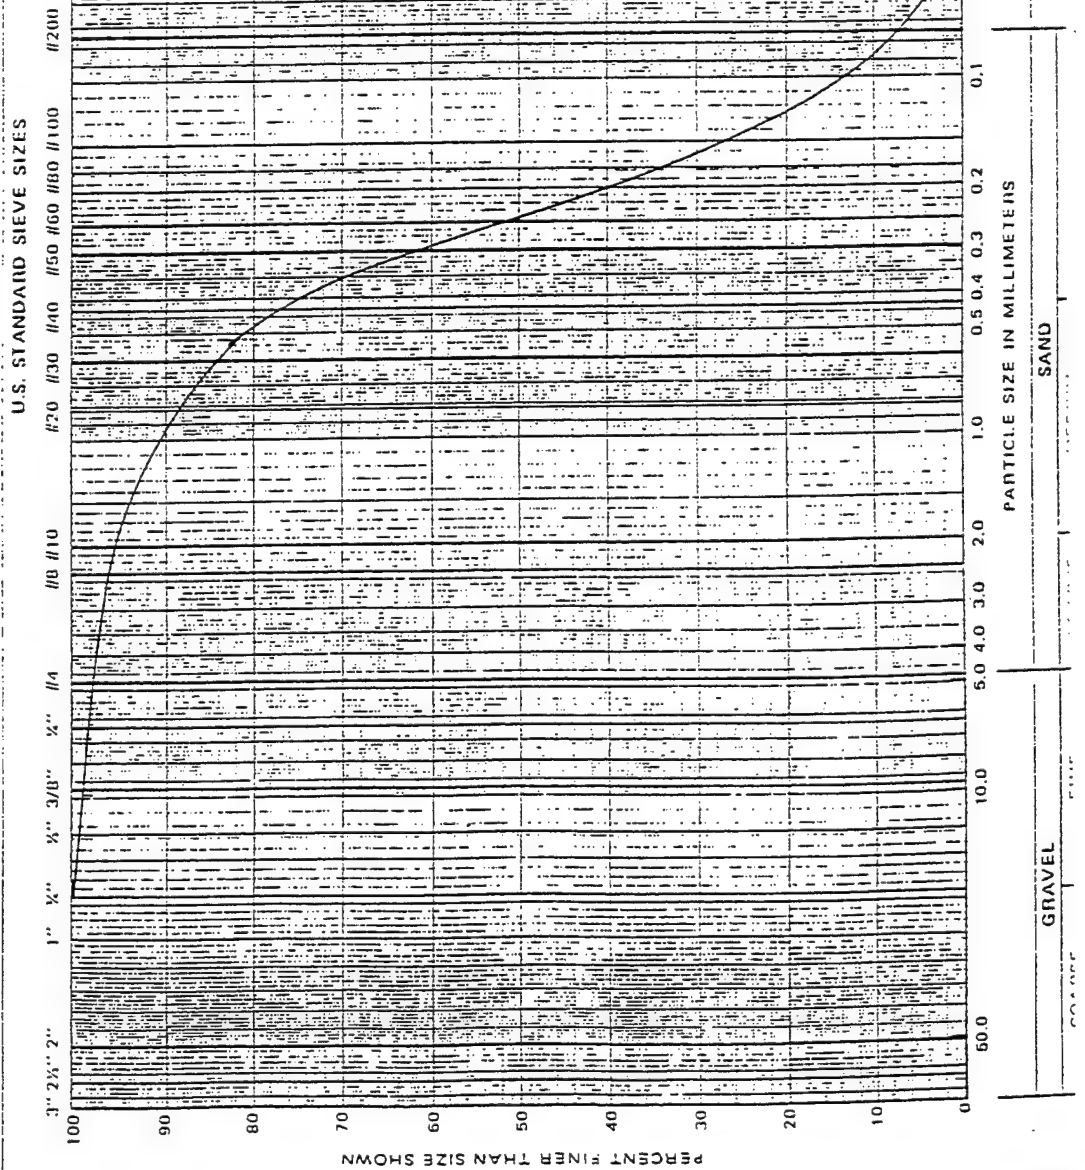

Huntingdon

Sample No. MWL3-01


Project: SDANG JOE FOSS FIELD
SIOUX FALLS SD

Classification (ASTM:D2487): SAND WITH CLAY, medium to fine
grained, with gravel, brown (SP-SC)

Reported To: SAIC ATTN: MR. JANARDAN PATEL

DEPTH 12'-14'

GRAIN SIZE DISTRIBUTION CURVE

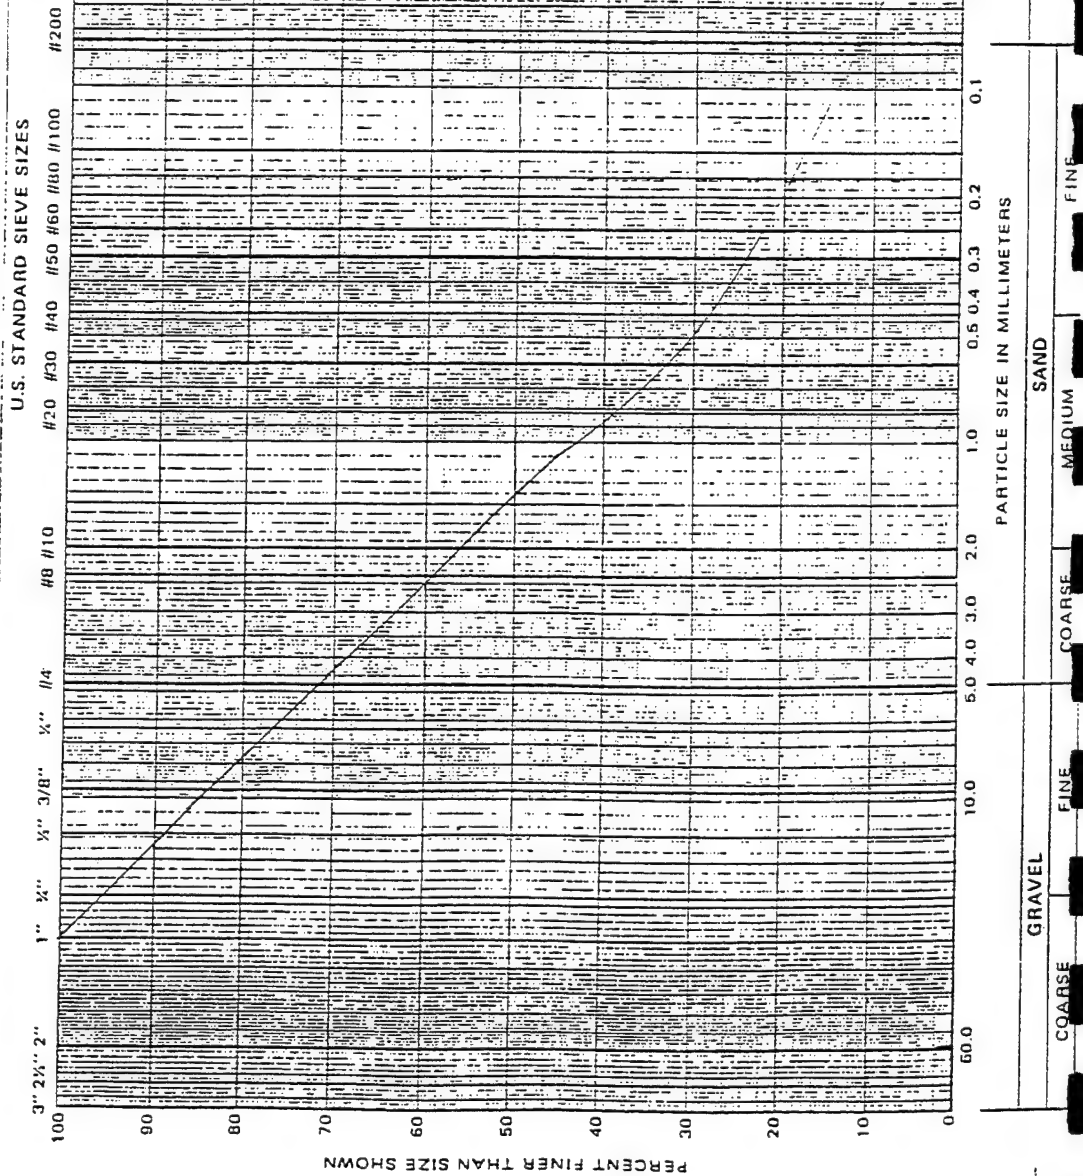

APPENDIX K. FIELD SAMPLING FORMS

THIS PAGE WAS INTENTIONALLY LEFT BLANK

Sampling Form

(Field Sheet)

Project Name and Number: SDANG ST 01-0827-04-3423-008
 Sampling Crew: P. FERRO, M. CRAMER
 Sampling Point Number: GSD1-1
 Sampling Location: SITE 12
 Sample Type: ☐ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____
 Date and Time Sample Collected: 6.13.95 1115
 Weather Conditions: PARTLY CLOUDY, WINDY FROM SOUTH, ~80°F

Purging Information (if applicable):

Method: _____
 Quantity of Water Purged: _____
 Disposition of Purge Water: N/A
 Date and Time of Purging: Start: _____ End: _____
 Comments: _____

Groundwater:

Date and Time Collected: _____
 Sampling Depth: _____
 Water Level: _____
 Sampling Method/Equipment: _____
 Field Measurements: pH _____ Temp: N/A Cond: _____ Alkalinity: _____
 Date and Time Filtered (if applicable): _____
 Comments: _____

Surface Water:

Date and Time Collected: _____
 Collection Method: _____
 Date and Time Filtered (if applicable): N/A
 Field Measurements: pH _____ Temp: _____ Cond: _____ Turbidity: _____
 Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 6.13.95 1115
 Sampling Depth: 2'-4' BLS
 Sampling Method: GED PROBE SOIL SAMPLER WITH LINER
 Comments: _____



An Employee-Owned Company

Sampling Form

(Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
Sampling Crew: P. FERRON, M. CRAMER
Sampling Point Number: GSD1-3
Sampling Location: SITE 12
Sample Type: ☐ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____
Date and Time Sample Collected: 6.13.95 1245
Weather Conditions: PARTLY CLOUDY, WINDY FROM SOUTH, ~80°F

Purging Information (if applicable):

Method: _____
Quantity of Water Purged: _____
Disposition of Purge Water: _____
Date and Time of Purging: Start: N/A End: _____
Comments: _____

Groundwater:

Date and Time Collected: _____
Sampling Depth: _____
Water Level: _____
Sampling Method/Equipment: N/A
Field Measurements: pH _____ Temp. N/A Cond: _____ Alkalinity: _____
Date and Time Filtered (if applicable): _____
Comments: _____

Surface Water:

Date and Time Collected: _____
Collection Method: _____
Date and Time Filtered (if applicable): _____
Field Measurements: pH _____ Temp. N/A Cond: _____ Turbidity: _____
Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 6.13.95 1245
Sampling Depth: 6-8' BLS
Sampling Method: GEOPROBE SOIL SAMPLER WITH LIDER
Comments: _____

Science Applications International Corporation ■ 1710 Goodridge Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book

Sampling Form (Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
Sampling Crew: P. FERRON, M. CRAMER
Sampling Point Number: G502-1
Sampling Location: SITE 12
Sample Type: ☐ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____
Date and Time Sample Collected: 6.13.95 1425
Weather Conditions: PARTLY CLOUDY, WINDY FROM SOUTH, ~80°F

Purging Information (if applicable):

Method: _____
Quantity of Water Purged: _____
Disposition of Purge Water: N/A
Date and Time of Purging: Start: N/A End: _____
Comments: _____

Groundwater:

Date and Time Collected: _____
Sampling Depth: _____
Water Level: _____
Sampling Method/Equipment: N/A
Field Measurements: pH _____ Temp: N/A Cond: _____ Alkalinity: _____
Date and Time Filtered (if applicable): _____
Comments: _____

Surface Water:

Date and Time Collected: _____
Collection Method: _____
Date and Time Filtered (if applicable): N/A
Field Measurements: pH _____ Temp: N/A Cond: _____ Turbidity: _____
Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 6.13.95 1425
Sampling Depth: 2-4' BLS
Sampling Method: GEOPROBE SOIL SAMPLER WITH LINER
Comments: _____

Sampling Form

(Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
 Sampling Crew: P. FERRON, M. CRAMER
 Sampling Point Number: GSD2-3
 Sampling Location: SITE 12
 Sample Type: ☐ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____
 Date and Time Sample Collected: 6.13.95 1445
 Weather Conditions: PARTLY CLOUDY, WINDY FROM SOUTH, ~80°F

Purging Information (if applicable):

Method: _____
 Quantity of Water Purged: _____
 Disposition of Purge Water: N/A
 Date and Time of Purging: Start: _____ End: _____
 Comments: _____

Groundwater:

Date and Time Collected: _____
 Sampling Depth: _____
 Water Level: _____
 Sampling Method/Equipment: N/A
 Field Measurements: pH _____ Temp: N/A Cond: _____ Alkalinity: _____
 Date and Time Filtered (if applicable): _____
 Comments: _____

Surface Water:

Date and Time Collected: _____
 Collection Method: _____
 Date and Time Filtered (if applicable): N/A
 Field Measurements: pH _____ Temp: N/A Cond: _____ Turbidity: _____
 Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 6.13.95 1445
 Sampling Depth: 6'-8' BLS
 Sampling Method: GEOPROBE SOIL SAMPLER WITH LINER
 Comments: _____



An Employee-Owned Company

Sampling Form

(Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
Sampling Crew: P. FERRON, M. CRAMER
Sampling Point Number: GS03-1
Sampling Location: SITE 12
Sample Type: ☐ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____
Date and Time Sample Collected: 6.13.95 1520
Weather Conditions: PARTLY CLOUDY, WINDY FROM SOUTH, ~80°F

Purging Information (if applicable):

Method: _____
Quantity of Water Purged: _____
Disposition of Purge Water: _____
Date and Time of Purging: Start: N/A End: _____
Comments: _____

Groundwater:

Date and Time Collected: _____
Sampling Depth: _____
Water Level: _____
Sampling Method/Equipment: N/A
Field Measurements: pH _____ Temp: N/A Cond: _____ Alkalinity: _____
Date and Time Filtered (if applicable): _____
Comments: _____

Surface Water:

Date and Time Collected: _____
Collection Method: _____
Date and Time Filtered (if applicable): _____
Field Measurements: pH _____ Temp: N/A Cond: _____ Turbidity: _____
Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 6.13.95 1520
Sampling Depth: 2'-4' BLS
Sampling Method: GEOPROBE SOIL SAMPLER WITH LINER
Comments: _____

Science Applications International Corporation ■ 1710 Goodridge Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book



An Employee-Owned Company

Sampling Form

(Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
Sampling Crew: P. FERRON, M. CRAMER
Sampling Point Number: GSD3-3
Sampling Location: SITE 12
Sample Type: ☐ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____
Date and Time Sample Collected: 6.13.95 1550
Weather Conditions: PARTLY CLOUDY, WINDY FROM SOUTH, ~80°F

Purging Information (if applicable):

Method: _____
Quantity of Water Purged: _____
Disposition of Purge Water: N/A
Date and Time of Purging: Start: N/A End: _____
Comments: _____

Groundwater:

Date and Time Collected: _____
Sampling Depth: _____
Water Level: _____
Sampling Method/Equipment: N/A
Field Measurements: pH _____ Temp: N/A Cond: _____ Alkalinity: _____
Date and Time Filtered (if applicable): _____
Comments: _____

Surface Water:

Date and Time Collected: _____
Collection Method: _____
Date and Time Filtered (if applicable): N/A
Field Measurements: pH _____ Temp: N/A Cond: _____ Turbidity: _____
Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 6.13.95 1550
Sampling Depth: 6'-8' BLS
Sampling Method: GEOPROBE SOIL SAMPLER WITH LINER
Comments: _____

Science Applications International Corporation ■ 1710 Goodridge Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book

Sampling Form

(Field Sheet)

Project Name and Number: SDANG SE 01-0827-04-3423-008
 Sampling Crew: P. FERRO, M. CRAMER
 Sampling Point Number: GSD4-1
 Sampling Location: SITE 12
 Sample Type: ☐ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____
 Date and Time Sample Collected: 6.13.95 1717
 Weather Conditions: PARTLY CLOUDY, WINDY FROM SOUTH, ~80°F

Purging Information (if applicable):

Method: _____
 Quantity of Water Purged: _____
 Disposition of Purge Water: _____
 Date and Time of Purging: Start: N/A End: _____
 Comments: _____

Groundwater:

Date and Time Collected: _____
 Sampling Depth: _____
 Water Level: _____
 Sampling Method/Equipment: _____
 Field Measurements: pH _____ Temp: N/A Cond: _____ Alkalinity: _____
 Date and Time Filtered (if applicable): _____
 Comments: _____

Surface Water:

Date and Time Collected: _____
 Collection Method: _____
 Date and Time Filtered (if applicable): N/A
 Field Measurements: pH _____ Temp: N/A Cond: _____ Turbidity: _____
 Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 6.13.95 1717
 Sampling Depth: 2'-4' BLS
 Sampling Method: GEDPROBE SOIL SAMPLER WITH LINER
 Comments: _____

Sampling Form

(Field Sheet)

Project Name and Number: SDANG ST 01-0827-04-3423-008
Sampling Crew: P. FERRON, M. CRAMER
Sampling Point Number: GSD4-3
Sampling Location: SITE 12
Sample Type: ☐ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____
Date and Time Sample Collected: 6.13.95 1740
Weather Conditions: PARTLY CLOUDY, WINDY FROM SOUTH, ~80°F

Purging Information (if applicable):

Method: _____
Quantity of Water Purged: _____
Disposition of Purge Water: N/A
Date and Time of Purging: Start: N/A End: _____
Comments: _____

Groundwater:

Date and Time Collected: _____
Sampling Depth: _____
Water Level: _____
Sampling Method/Equipment: N/A
Field Measurements: pH _____ Temp: N/A Cond: _____ Alkalinity: _____
Date and Time Filtered (if applicable): _____
Comments: _____

Surface Water:

Date and Time Collected: _____
Collection Method: _____
Date and Time Filtered (if applicable): _____
Field Measurements: pH _____ Temp: N/A Cond: _____ Turbidity: _____
Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 6.13.95 1740
Sampling Depth: 6-8" BLS
Sampling Method: GEOPROBE SOIL SAMPLER WITH LINER
Comments: _____

Sampling Form

(Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
 Sampling Crew: P. FERRON, M. CRAMER
 Sampling Point Number: GSD5-2, GSD6-2
 Sampling Location: SITE 12
 Sample Type: ☐ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____
 Date and Time Sample Collected: 6.13.95 1830, 1915
 Weather Conditions: PARTLY CLOUDY, WIND FROM SOUTH, ~80°F

Purging Information (if applicable):

Method: _____
 Quantity of Water Purged: _____
 Disposition of Purge Water: N/A
 Date and Time of Purging: Start: _____ End: _____
 Comments: _____

Groundwater:

Date and Time Collected: _____
 Sampling Depth: _____
 Water Level: _____
 Sampling Method/Equipment: N/A
 Field Measurements: pH _____ Temp: N/A Cond: _____ Alkalinity: _____
 Date and Time Filtered (if applicable): _____
 Comments: _____

Surface Water:

Date and Time Collected: _____
 Collection Method: _____
 Date and Time Filtered (if applicable): N/A
 Field Measurements: pH _____ Temp: N/A Cond: _____ Turbidity: _____
 Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 6.13.95 1830, 1915
 Sampling Depth: 4-6' BLS
 Sampling Method: GEOPROBE SOIL SAMPLER WITH LINER
 Comments: GSD6-2 IS A DUPLICATE SAMPLE OF GSD5-2

Sampling Form

(Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
 Sampling Crew: P. FERRO, M. CRAMER
 Sampling Point Number: GSD5-3
 Sampling Location: SITE 12
 Sample Type: ☐ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____
 Date and Time Sample Collected: 6.13.95 1840
 Weather Conditions: PARTLY CLOUDY, WINDY FROM SOUTH, ~80°F

Purging Information (if applicable):

Method: _____
 Quantity of Water Purged: _____
 Disposition of Purge Water: N/A
 Date and Time of Purging: Start: _____ End: _____
 Comments: _____

Groundwater:

Date and Time Collected: _____
 Sampling Depth: _____
 Water Level: _____
 Sampling Method/Equipment: _____
 Field Measurements: pH _____ Temp: N/A Cond: _____ Alkalinity: _____
 Date and Time Filtered (if applicable): _____
 Comments: _____

Surface Water:

Date and Time Collected: _____
 Collection Method: _____
 Date and Time Filtered (if applicable): _____
 Field Measurements: pH _____ Temp: N/A Cond: _____ Turbidity: _____
 Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 6.13.95 1840
 Sampling Depth: 6-8' BLS
 Sampling Method: GEOPROBE SOIL SAMPLER WITH LINER
 Comments: _____

Sampling Form

(Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
 Sampling Crew: P. FERRON, M. CRAMER
 Sampling Point Number: GW01
 Sampling Location: SITE 12
 Sample Type: ☒ GW ☐ SW ☐ Soil ☐ SED ☐ Other: _____
 Date and Time Sample Collected: 6.16.95 0900
 Weather Conditions: SUNNY, WINDY

Purging Information (if applicable):

Method: _____
 Quantity of Water Purged: _____
 Disposition of Purge Water: N/A
 Date and Time of Purging: Start: _____ End: _____
 Comments: _____

Groundwater:

Date and Time Collected: 6.16.95 0900
 Sampling Depth: 10'-12' BLS
 Water Level: NR
 Sampling Method/Equipment: GEOPROBE WATER SAMPLER USING MANUAL INERTIA
 Field Measurements: pH 7.40 Temp: 72.9°F Cond: 601 µmhos/cm Alkalinity: _____
 Date and Time Filtered (if applicable): N/A
 Comments: _____

Surface Water:

Date and Time Collected: _____
 Collection Method: _____
 Date and Time Filtered (if applicable): N/A
 Field Measurements: pH _____ Temp: N/A Cond: _____ Turbidity: _____
 Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: _____
 Sampling Depth: _____
 Sampling Method: N/A
 Comments: _____



An Employee-Owned Company

Sampling Form (Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
Sampling Crew: P. FERRON, M. CRAMER
Sampling Point Number: GWOZ
Sampling Location: SITE 12
Sample Type: ☒ GW ☐ SW ☐ Soil ☐ SED ☐ Other: _____
Date and Time Sample Collected: 6.16.95 0955
Weather Conditions: SUNNY, WINDY

Purging Information (if applicable):

Method: _____
Quantity of Water Purged: _____
Disposition of Purge Water: N/A
Date and Time of Purging: Start: _____ End: _____
Comments: _____

Groundwater:

Date and Time Collected: 6.16.95 0955
Sampling Depth: 10-12' BLS
Water Level: NR
Sampling Method/Equipment: GEOPROBE WATER SAMPLER USING MANUAL INERTIA
Field Measurements: pH 7.38 Temp: 76.3°F Cond: 7.2 uM/cm Alkalinity: _____
Date and Time Filtered (if applicable): N/A
Comments: _____

Surface Water:

Date and Time Collected: _____
Collection Method: _____
Date and Time Filtered (if applicable): N/A
Field Measurements: pH _____ Temp: N/A Cond: _____ Turbidity: _____
Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: _____
Sampling Depth: _____
Sampling Method: N/A
Comments: _____

Science Applications International Corporation ■ 1710 Goodridge Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book

Sampling Form

(Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
 Sampling Crew: P. FERRON, M. CRAMER
 Sampling Point Number: GW03
 Sampling Location: SITE 12
 Sample Type: ☒ GW ☐ SW ☐ Soil ☐ SED ☐ Other: _____
 Date and Time Sample Collected: 6.16.95 1045
 Weather Conditions: SUNNY, WINDY

Purging Information (if applicable):

Method: _____
 Quantity of Water Purged: _____
 Disposition of Purge Water: N/A
 Date and Time of Purging: Start: _____ End: _____
 Comments: _____

Groundwater:

Date and Time Collected: 6.16.95 1045
 Sampling Depth: 10-12' BLS
 Water Level: NR
 Sampling Method/Equipment: GEOPROBE WATER SAMPLER USING MANUAL INERTIA
 Field Measurements: pH 7.92 Temp: 76.6°F Cond: 468 µmhos/cm Alkalinity: _____
 Date and Time Filtered (if applicable): N/A
 Comments: _____

Surface Water:

Date and Time Collected: _____
 Collection Method: _____
 Date and Time Filtered (if applicable): N/A
 Field Measurements: pH _____ Temp: N/A Cond: _____ Turbidity: _____
 Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: _____
 Sampling Depth: _____
 Sampling Method: _____
 Comments: N/A

Science Applications International Corporation ■ 1710 Goodridge Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book



An Employee-Owned Company

Sampling Form (Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
Sampling Crew: P. FERRON, M. CRAWER
Sampling Point Number: GW04
Sampling Location: SITE 12
Sample Type: ☒ GW ☐ SW ☐ Soil ☐ SED ☐ Other: _____
Date and Time Sample Collected: 6.16.95 1125
Weather Conditions: SUNNY, WINDY

Purging Information (if applicable):

Method: _____
Quantity of Water Purged: _____
Disposition of Purge Water: N/A
Date and Time of Purging: Start: _____ End: _____
Comments: _____

Groundwater:

Date and Time Collected: 6.16.95 1125
Sampling Depth: 10-12' BLS
Water Level: NR
Sampling Method/Equipment: GEOPROBE WATERSAMPLER USING MANUAL INERTIA
Field Measurements: pH 7.29 Temp: 74.2°F Cond: 9.00 μ S/cm Alkalinity: NR
Date and Time Filtered (if applicable): N/A
Comments: _____

Surface Water:

Date and Time Collected: _____
Collection Method: _____
Date and Time Filtered (if applicable): N/A
Field Measurements: pH _____ Temp: _____ Cond: _____ Turbidity: _____
Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: _____
Sampling Depth: _____
Sampling Method: N/A
Comments: _____

Science Applications International Corporation ■ 1710 Goodridge Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book



An Employee-Owned Company

Sampling Form

(Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
Sampling Crew: P. FERRON, M. CRAMER
Sampling Point Number: GW05
Sampling Location: SITE 12
Sample Type: ☒ GW ☐ SW ☐ Soil ☐ SED ☐ Other: _____
Date and Time Sample Collected: 6.15.95 1020
Weather Conditions: PARTLY SUNNY, WINDY

Purging Information (if applicable):

Method: _____
Quantity of Water Purged: _____
Disposition of Purge Water: N/A
Date and Time of Purging: Start: _____ End: _____
Comments: _____

Groundwater:

Date and Time Collected: 6.15.95 1020
Sampling Depth: 10'-12' BLS
Water Level: NR
Sampling Method/Equipment: GEOPROBE WATER SAMPLER USING MANUAL INERTIA
Field Measurements: pH 6.70 Temp: 74.6°F Cond: 12.01 uS/cm Alkalinity: NR
Date and Time Filtered (if applicable): NA
Comments: GW06 IS A DUPLICATE OF GW05

Surface Water:

Date and Time Collected: _____
Collection Method: _____
Date and Time Filtered (if applicable): N/A
Field Measurements: pH _____ Temp: N/A Cond: _____ Turbidity: _____
Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: _____
Sampling Depth: _____
Sampling Method: N/A
Comments: _____

Science Applications International Corporation ■ 1710 Goodridge Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book



An Employee-Owned Company

Sampling Form (Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
Sampling Crew: P. Ferron, T. Bugg
Sampling Point Number: MW 12-01
Sampling Location: Site 12
Sample Type: 7-14-95 ☐ SW ☒ Soil ☐ SED ☐ Other: _____
Date and Time Sample Collected: 07-14-95 17:15
Weather Conditions: Hot, Sunny, wind from South

Purging Information (if applicable):

Method: _____
Quantity of Water Purged: _____
Disposition of Purge Water: _____
Date and Time of Purging: Start: _____ End: _____
Comments: _____

Groundwater:

Date and Time Collected: _____
Sampling Depth: _____
Water Level: _____
Sampling Method/Equipment: _____
Field Measurements: pH _____ Temp: _____ Cond: _____ Alkalinity: _____
Date and Time Filtered (if applicable): _____
Comments: _____

Surface Water:

Date and Time Collected: _____
Collection Method: _____
Date and Time Filtered (if applicable): _____
Field Measurements: pH _____ Temp: _____ Cond: _____ Turbidity: _____
Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 07-14-95
Sampling Depth: 14-16ft
Sampling Method: Split spoon
Comments: _____

Science Applications International Corporation ■ 1710 Goodridge Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book



An Employee-Owned Company

Sampling Form (Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
Sampling Crew: P. Ferron, T. Bugg
Sampling Point Number: MW12-02
Sampling Location: Site 12
Sample Type: ☒ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____
Date and Time Sample Collected: 07-15-95 07:20
Weather Conditions: Partly Cloudy, Wind from North, Temperature in 80's

Purging Information (if applicable):

Method: _____
Quantity of Water Purged: _____
Disposition of Purge Water: _____
Date and Time of Purging: Start: _____ End: _____
Comments: _____

Groundwater:

Date and Time Collected: _____
Sampling Depth: _____
Water Level: _____
Sampling Method/Equipment: _____
Field Measurements: pH _____ Temp: _____ Cond: _____ Alkalinity: _____
Date and Time Filtered (if applicable): _____
Comments: _____

Surface Water:

Date and Time Collected: _____
Collection Method: _____
Date and Time Filtered (if applicable): _____
Field Measurements: pH _____ Temp: _____ Cond: _____ Turbidity: _____
Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 07-15-95 07:20
Sampling Depth: 6-8 ft
Sampling Method: split spoon
Comments: _____

Science Applications International Corporation ■ 1710 Goodridge Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book

Sampling Form (Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
Sampling Crew: P. Ferron, T. Bugg
Sampling Point Number: MW12-03
Sampling Location: Site 12
Sample Type: ☐ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____
Date and Time Sample Collected: 07-15-95 20:10
Weather Conditions: Partly Cloudy, Wind from North, Temperature in 80's

Purging Information (if applicable):

Method: _____
Quantity of Water Purged: _____
Disposition of Purge Water: _____
Date and Time of Purging: Start: _____ End: _____
Comments: _____

Groundwater:

Date and Time Collected: _____
Sampling Depth: _____
Water Level: _____
Sampling Method/Equipment: _____
Field Measurements: pH _____ Temp: _____ Cond: _____ Alkalinity: _____
Date and Time Filtered (if applicable): _____
Comments: _____

Surface Water:

Date and Time Collected: _____
Collection Method: _____
Date and Time Filtered (if applicable): _____
Field Measurements: pH _____ Temp: _____ Cond: _____ Turbidity: _____
Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 07-15-95 20:10
Sampling Depth: 10-12 ft
Sampling Method: Split Spoon
Comments: _____

Science Applications International Corporation ■ 1710 Goodridge Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book

Sampling Form

(Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008

Sampling Crew: P. Ferron, T. Bugg

Sampling Point Number: MW 12-04

Sampling Location: Site 12

Sample Type: ☐ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____

Date and Time Sample Collected: 07-15-95 16:00

Weather Conditions: Partly Cloudy, Wind from North, Temperature in 80's

Purging Information (if applicable):

Method: _____

Quantity of Water Purged: _____

Disposition of Purge Water: _____

Date and Time of Purging: Start: _____ End: _____

Comments: _____

Groundwater:

Date and Time Collected: _____

Sampling Depth: _____

Water Level: _____

Sampling Method/Equipment: _____

Field Measurements: pH _____ Temp: _____ Cond: _____ Alkalinity: _____

Date and Time Filtered (if applicable): _____

Comments: _____

Surface Water:

Date and Time Collected: _____

Collection Method: _____

Date and Time Filtered (if applicable): _____

Field Measurements: pH _____ Temp: _____ Cond: _____ Turbidity: _____

Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 07-15-95 16:00

Sampling Depth: 6-8 ft

Sampling Method: Split Spoon

Comments: _____

Sampling Form

(Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
 Sampling Crew: P. Ferron, T. Bugg
 Sampling Point Number: MW12-05
 Sampling Location: Site 12
 Sample Type: ☐ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____
 Date and Time Sample Collected: 07-15-95 18:05
 Weather Conditions: Partly Cloudy, Wind from North, Temperature in 80's

Purging Information (if applicable):

Method: _____
 Quantity of Water Purged: _____
 Disposition of Purge Water: _____
 Date and Time of Purging: Start: _____ End: _____
 Comments: _____

Groundwater:

Date and Time Collected: _____
 Sampling Depth: _____
 Water Level: _____
 Sampling Method/Equipment: _____
 Field Measurements: pH _____ Temp: _____ Cond: _____ Alkalinity: _____
 Date and Time Filtered (if applicable): _____
 Comments: _____

Surface Water:

Date and Time Collected: _____
 Collection Method: _____
 Date and Time Filtered (if applicable): _____
 Field Measurements: pH _____ Temp: _____ Cond: _____ Turbidity: _____
 Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 07-15-95 18:05
 Sampling Depth: 6-8 ft
 Sampling Method: Split Spoon
 Comments: _____



An Employee-Owned Company

Sampling Form (Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
Sampling Crew: P. Ferron, T. Bugg
Sampling Point Number: MW1-12-01
Sampling Location: Site 12
Sample Type: ☒ GW ☐ SW ☐ Soil ☐ SED ☐ Other: _____
Date and Time Sample Collected: 07-18-95 14:10
Weather Conditions: Sunny, wind from North, Temperature 80's to 90's

Purging Information (if applicable):

Method: Submersible Pump
Quantity of Water Purged: 26 gallons
Disposition of Purge Water: Disposed of down sanitary sewer
Date and Time of Purging: Start: NR End: 1410
Comments: _____

Groundwater:

Date and Time Collected: 07-18-95 14:10
Sampling Depth: 8.5 to 10.5 ft
Water Level: 8.23 ft
Sampling Method/Equipment: Disposable polypropylene bailer
Field Measurements: pH 6.37 Temp: 59.8 °F Cond: 1040 us/cm Alkalinity: NR
Date and Time Filtered (if applicable): NA
Comments: _____

Surface Water:

Date and Time Collected: _____
Collection Method: _____
Date and Time Filtered (if applicable): _____
Field Measurements: pH _____ Temp: _____ Cond: _____ Turbidity: _____
Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: _____
Sampling Depth: _____
Sampling Method: _____
Comments: _____

Science Applications International Corporation ■ 1710 Goodridge Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book

Sampling Form

(Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
 Sampling Crew: P. Ferron, T. Bugg
 Sampling Point Number: MW 2-12-1
 Sampling Location: Site 12
 Sample Type: ☒ GW ☐ SW ☐ Soil ☐ SED ☐ Other: _____
 Date and Time Sample Collected: 07-18-95 1300
 Weather Conditions: Sunny, wind from North, Temperature 80's to 90's

Purging Information (if applicable):

Method: Submersible Pump
 Quantity of Water Purged: 40 gallons
 Disposition of Purge Water: Disposed of down sanitary sewer
 Date and Time of Purging: Start: NR End: 1300
 Comments: _____

Groundwater:

Date and Time Collected: 07-18-95 13:00
 Sampling Depth: 7 to 10 ft
 Water Level: 7.16 ft
 Sampling Method/Equipment: Disposable polypropylene bailer
 Field Measurements: pH 5.48 Temp: 58.6 °F Cond: 1350 us/cm Alkalinity: NR
 Date and Time Filtered (if applicable): NA
 Comments: _____

Surface Water:

Date and Time Collected: _____
 Collection Method: _____
 Date and Time Filtered (if applicable): _____
 Field Measurements: pH _____ Temp: _____ Cond: _____ Turbidity: _____
 Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: _____
 Sampling Depth: _____
 Sampling Method: _____
 Comments: _____

Science Applications International Corporation ■ 1710 Goodridge Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book



An Employee-Owned Company

Sampling Form

(Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
Sampling Crew: P. Ferron, T. Bugg
Sampling Point Number: MW3-12-01
Sampling Location: Site 12
Sample Type: ☒ GW ☐ SW ☐ Soil ☐ SED ☐ Other: _____
Date and Time Sample Collected: 07-18-95 14:50
Weather Conditions: Sunny, wind from North, Temperature 80's to 90's

Purging Information (if applicable):

Method: Submersible Pump
Quantity of Water Purged: 25 gallons
Disposition of Purge Water: Disposed of down sanitary sewer
Date and Time of Purging: Start: NA End: 1450
Comments: _____

Groundwater:

Date and Time Collected: 07-18-95 14:50
Sampling Depth: 8 to 11 ft
Water Level: 6.9 ft 7-18-95 7.90 ft
Sampling Method/Equipment: Disposable polypropylene bailer
Field Measurements: pH 6.38 Temp: 60.8 °F Cond: 1041 µS/cm Alkalinity: NA
Date and Time Filtered (if applicable): NA
Comments: _____

Surface Water:

Date and Time Collected: _____
Collection Method: _____
Date and Time Filtered (if applicable): _____
Field Measurements: pH _____ Temp: _____ Cond: _____ Turbidity: _____
Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: _____
Sampling Depth: _____
Sampling Method: _____
Comments: _____

Science Applications International Corporation ■ 1710 Goodridge Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book



An Employee-Owned Company

Sampling Form

(Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
Sampling Crew: P. Ferron, T. Bugg
Sampling Point Number: MW 4-12-01
Sampling Location: Site 12
Sample Type: ☒ GW ☐ SW ☐ Soil ☐ SED ☐ Other: _____
Date and Time Sample Collected: 07-18-95 16:00
Weather Conditions: Sunny, wind from North, Temperature 80's to 90's

Purging Information (if applicable):

Method: Submersible Pump
Quantity of Water Purged: 26 gallons
Disposition of Purge Water: Disposed of down sanitary sewer
Date and Time of Purging: Start: NA End: 1600
Comments: _____

Groundwater:

Date and Time Collected: 07-18-95 16:00
Sampling Depth: 8 to 11 ft
Water Level: 7.88 ft
Sampling Method/Equipment: Disposable polypropylene Bailer
Field Measurements: pH 6.96 Temp: 60.2°F Cond: 220 µS/cm Alkalinity: NA
Date and Time Filtered (if applicable): NA
Comments: _____

Surface Water:

Date and Time Collected: _____
Collection Method: _____
Date and Time Filtered (if applicable): _____
Field Measurements: pH _____ Temp: _____ Cond: _____ Turbidity: _____
Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: _____
Sampling Depth: _____
Sampling Method: _____
Comments: _____

Science Applications International Corporation ■ 1710 Goodridge Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book



An Employee-Owned Company

Sampling Form (Field Sheet)

Project Name and Number: SDANG ST 01-0827-04-3423-008
Sampling Crew: P. Ferron, T. Bugg
Sampling Point Number: MW5-12-01
Sampling Location: Site 12
Sample Type: ☒ GW ☐ SW ☐ Soil ☐ SED ☐ Other: _____
Date and Time Sample Collected: 07-18-95 1650
Weather Conditions: Sunny, wind from North, Temperature 80's to 90's

Purging Information (if applicable):

Method: Submersible Pump
Quantity of Water Purged: 32 gallons
Disposition of Purge Water: disposed of down sanitary sewer
Date and Time of Purging: Start: NA End: 1650
Comments: _____

Groundwater:

Date and Time Collected: 07-18-95 1650
Sampling Depth: 6 to 9 ft
Water Level: 6.23 ft
Sampling Method/Equipment: Disposable polypropylene Bailer
Field Measurements: pH 6.96 Temp: 59.5°F Cond: 832 µS/cm Alkalinity: NA
Date and Time Filtered (if applicable): NA
Comments: _____

Surface Water:

Date and Time Collected: _____
Collection Method: _____
Date and Time Filtered (if applicable): _____
Field Measurements: pH _____ Temp: _____ Cond: _____ Turbidity: _____
Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: _____
Sampling Depth: _____
Sampling Method: _____
Comments: _____

Science Applications International Corporation ■ 1710 Goodridge Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book

Well Development Form (Field Sheet)

Project Name and Number: SDANG 0513 04 3423 008

Well Number and Location: MW 12-01

Development Crew: Pete Fern / Tracy Russ Driller (if applicable): Lyle Porter / Mark Lode

Water Levels/Time: Initial: 8.22 Pumping: 8.65 Final: 8.26

Total Well Depth: Initial: 15 Final: 15

Date and Time: Begin: 0730 p 7/17/95 Completed: 7/17/95 @ 0845

Development: Method(s): one bailer with nylon rope for 10 min;
Grundfos Red-Flow pump

Total Quantity of Water Removed: 126 (28.6 well volumes) gals
4.4 gal / well volume

Date/Time and Pump Setting	Discharge Rate* and Measurement Method	Field Measurements				Remarks (Including Sand Production)
		Temp (°F)	Specific Conductivity (umhos/cm)	pH (Standard Units)	Turbidity	
7/17/95 0740	2 GPM Grundfos	60.4	1017	6.18	very	14 ft
0750	" "	59.5	1034	5.70	cloudy	14 ft
0803	" "	59.6	1018	6.48	clear	12 ft
0815	" "	59.8	1040	6.65	clear	10 ft
0830	" "	59.7	1034	6.51	clear	12 ft
0843	" "	59.7	1041	6.53	clear	14 ft Developed

*gallons per minute or bailer capacity

Science Applications International Corporation ■ 8400 Westpark Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book

Well Development Form

(Field Sheet)

Project Name and Number: SDANG 0105130Y 3423 008

Well Number and Location: MW12-02

Development Crew: Pete Ellison / T. B. 99 Driller (if applicable): Lyle Porter, Mark Ledy

Water Levels/Time: Initial: 7.15 Pumping: 7.32 Final: 7.16

Total Well Depth: Initial: 15.05 Final: 15.05

Date and Time: Begin: 7/17/95 @ 0925 Completed: 7/17/95 @ 1114

Development: Method(s): PVC bailer w/ nylon rope to get initial out
Grundfos Rediflow pump

Total Quantity of Water Removed: 199 (38.7 well volumes) gals
5.14 gal / well vol

Date/Time and Pump Setting	Discharge Rate* and Measurement Method	Field Measurements				Remarks (Including Sand Production)
		Temp (°C) F	Specific Conductivity (umhos/cm)	pH (Standard Units)	Turbidity	
7/17/95 0928	5 gal / 3 min (bailer)	60.5	1600	6.44	very	
0936	2 GPM (graduated bucket)	—	—	—	—	14 ft
0954	" "	60.9	1557	6.31	cloudy	"
1002	" "	61.0	1480	6.28	clear	"
1011	" "	58.9	1450	6.27	clear	12 ft
1023	" "	59.1	1470	6.25	clear	10 ft
1035	" "	59.1	1460	6.26	clear	9 ft
1045	" "	59.1 61.0	1402	6.35	clear	10 ft * calibration was noted off
1100	" "	59.1	1390	6.38	clear	12 ft
1111	" "	59.5	1410	6.38	clear	14 ft Developed

*gallons per minute or bailer capacity

Science Applications International Corporation ■ 8400 Westpark Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book

Well Development Form

(Field Sheet)

Project Name and Number: SDANG 01 0513 04 3423 008

Well Number and Location: MW12-03

Development Crew: T. Buss Driller (if applicable): Mark Lesley

Water Levels/Time: Initial: 7.96 Pumping: 8.16 Final: 7.98

Total Well Depth: Initial: 15 Final: 15

Date and Time: Begin: 7/17/95 @ 1255 Completed: 7/17/95 @ 1412

Development: Method(s): PVC Bailer w/ nylon rope

Grundfos Rediflow pump
Total Quantity of Water Removed: 147 (32.1 well vol.) gals
4.58 gal/well vol

Date/Time and Pump Setting	Discharge Rate* and Measurement Method	Field Measurements				Remarks (Including Sand Production)
		Temp (°F)	Specific Conductivity (umhos/cm)	pH (Standard Units)	Turbidity	
1256	5gal/3 min bucket	67.6	952	6.59	very	2.5ppm
1301	2gpm (graduated bucket)	—	—	—	—	14ft
1320	" "	61.7	981	6.25	clear	14ft 3ppm
1335	" "	61.0	970	6.15	clear	12ft
1346	" "	62.0	1001	6.62	clear	10ft 2ppm
1359	" "	61.8	1008	6.62	clear	12ft
1412	" "	62.0	1000	6.60	clear	14ft Developed

*gallons per minute or bailer capacity

Science Applications International Corporation ■ 8400 Westpark Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book



An Employee-Owned Company

Well Development Form

(Field Sheet)

Project Name and Number: SDANG 01 0513 04 3423 008

Well Number and Location: MW12-04

Development Crew: P. Ferron / T. Duggs Driller (if applicable): Mark Ledy

Water Levels/Time: Initial: 7.85 Pumping: 8.08 Final: 7.88

Total Well Depth: Initial: 15.15 Final: 15.15

Date and Time: Begin: 7/17/95 @ 1505 Completed: 7/17/95 @ 1625

Development: Method(s): PVC bailer w/ nylon rope;
Grundfos Rediflow

Total Quantity of Water Removed: 157 gal (33.1 well vol) gals
4.75 gal/well vol

Date/Time and Pump Setting	Discharge Rate* and Measurement Method	Field Measurements				Remarks (Including Sand Production)
		Temp (°C)	Specific Conductivity (umhos/cm)	pH (Standard Units)	Turbidity	
7/17/95 1505	5 gal/min bucket	64.7	846	6.82	very	0.8/11
1509	2 gpm (graduated bucket)	—	—	—	4	
1524	" "	61.5	789	6.67	clear	14 ft BxG
1536	" "	61.5	780	6.62	clear	12 ft BxG
1546	" "	61.3	759	6.61	clear	10 ft BxG
1600	" "	61.3	777	6.71	clear	12 ft BxG
1615	" "	61.3	770	6.75	clear	14 ft BxG
1625	" "	61.3	772	6.77	clear	14 ft BxG Developed

*gallons per minute or bailer capacity

Science Applications International Corporation ■ 8400 Westpark Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book



An Employee-Owned Company

Well Development Form

(Field Sheet)

Project Name and Number: SDANG 01 0513 04 3423 008

Well Number and Location: MW12-05

Development Crew: P. Felson / T. Dug Driller (if applicable): Life Porter / Mark Lohy

Water Levels/Time: Initial: 7.18 Pumping: 7.35 Final: 7.25

Total Well Depth: Initial: 14.97 Final: 14.97

Date and Time: Begin: 7/17/95 @ 1655 Completed: 7/17/95 @ 1809

Development: Method(s): PRC Bailer w/ nylon Rope

Grind-His Red-Flow pump
Total Quantity of Water Removed: 148 gal (29.25 well vol) gals
5.06 gal / well vol

Date/Time and Pump Setting	Discharge Rate* and Measurement Method	Field Measurements				Remarks (Including Sand Production)
		Temp (°C)	Specific Conductivity (umhos/cm)	pH (Standard Units)	Turbidity	
7/17/95 1656	5 gal / 3 min (bailer)	66.4	871	6.89	very	0.5 ppm
1700	25 ppm (graduated bucket)	-	-	-	tt	
1723	" 4	60.4	820	6.65	clear	14 ft
1734	" "	60.6	825	6.71	clear	12 ft OK
1744	" "	60.5	819	6.80	clear	10 ft
1756	" "	60.4	818	6.78	clear	11 ft OK
1809	" "	60.2	814	6.73	clear	13 ft Developed

*gallons per minute or bailer capacity

Science Applications International Corporation ■ 8400 Westpark Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book



Sampling Form (Field Sheet)

Project Name and Number: SDANG ST 01-0827-04-3423-008
Sampling Crew: P. FERRON, M. CRAMER
Sampling Point Number: GS13-1-1
Sampling Location: SITE 13
Sample Type: ☐ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____
Date and Time Sample Collected: 6.15.95 1330
Weather Conditions: PARTLY SUNNY, WINDY

Purging Information (if applicable):

Method: _____
Quantity of Water Purged: _____
Disposition of Purge Water: _____
Date and Time of Purging: Start: N/A End: _____
Comments: _____

Groundwater:

Date and Time Collected: _____
Sampling Depth: _____
Water Level: _____
Sampling Method/Equipment: N/A
Field Measurements: pH _____ Temp: N/A Cond: _____ Alkalinity: _____
Date and Time Filtered (if applicable): _____
Comments: _____

Surface Water:

Date and Time Collected: _____
Collection Method: _____
Date and Time Filtered (if applicable): N/A
Field Measurements: pH _____ Temp: N/A Cond: _____ Turbidity: _____
Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 6.15.95 1330
Sampling Depth: 2-4' BLS
Sampling Method: GEOPROBE SOIL SAMPLER WITH LINER
Comments: _____



An Employee-Owned Company

Sampling Form (Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
Sampling Crew: P. FERRON, M. CRAMER
Sampling Point Number: GS13-1-4
Sampling Location: SITE 13 1/2 mile
Sample Type: ☐ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____
Date and Time Sample Collected: 6.15.95 1410
Weather Conditions: PARTLY SUNNY, WINDY

Purging Information (if applicable):

Method: _____
Quantity of Water Purged: _____
Disposition of Purge Water: N/A
Date and Time of Purging: Start: _____ End: _____
Comments: _____

Groundwater:

Date and Time Collected: _____
Sampling Depth: _____
Water Level: _____
Sampling Method/Equipment: _____
Field Measurements: pH _____ Temp: N/A Cond: N/A Alkalinity: _____
Date and Time Filtered (if applicable): _____
Comments: _____

Surface Water:

Date and Time Collected: _____
Collection Method: _____
Date and Time Filtered (if applicable): _____
Field Measurements: pH _____ Temp: N/A Cond: N/A Turbidity: _____
Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 6.15.95 1410
Sampling Depth: 8-10' BLS
Sampling Method: GEOPROBE SOIL SAMPLER WITH LINER
Comments: _____

Science Applications International Corporation ■ 1710 Goodridge Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book

Sampling Form (Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
 Sampling Crew: P. FERRON, M. CRAMER
 Sampling Point Number: GS13-2-1
 Sampling Location: SITE 13
 Sample Type: ☐ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____
 Date and Time Sample Collected: 6.15.95 1450
 Weather Conditions: PARTLY SUNNY, WINDY

Purging Information (if applicable):

Method: _____
 Quantity of Water Purged: _____
 Disposition of Purge Water: _____
 Date and Time of Purging: Start: N/A End: _____
 Comments: _____

Groundwater:

Date and Time Collected: _____
 Sampling Depth: _____
 Water Level: _____
 Sampling Method/Equipment: _____
 Field Measurements: pH _____ Temp: N/A Cond: _____ Alkalinity: _____
 Date and Time Filtered (if applicable): _____
 Comments: _____

Surface Water:

Date and Time Collected: _____
 Collection Method: _____
 Date and Time Filtered (if applicable): N/A
 Field Measurements: pH _____ Temp: _____ Cond: _____ Turbidity: _____
 Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 6.15.95
 Sampling Depth: 2-4' BLS
 Sampling Method: GEOPROBE SOIL SAMPLER WITH LINER
 Comments: _____

Sampling Form

(Field Sheet)

Project Name and Number: SDANG ST 01-0827-04-3423-008
 Sampling Crew: P. FERRON M. CRAMER
 Sampling Point Number: GS13-2-4
 Sampling Location: SITE 13
 Sample Type: ☐ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____
 Date and Time Sample Collected: 6.15.95 1540
 Weather Conditions: PARTLY SUNNY, WINDY

Purging Information (if applicable):

Method: _____
 Quantity of Water Purged: _____
 Disposition of Purge Water: N/A
 Date and Time of Purging: Start: _____ End: _____
 Comments: _____

Groundwater:

Date and Time Collected: _____
 Sampling Depth: _____
 Water Level: _____
 Sampling Method/Equipment: N/A
 Field Measurements: pH _____ Temp: _____ Cond: _____ Alkalinity: _____
 Date and Time Filtered (if applicable): _____
 Comments: _____

Surface Water:

Date and Time Collected: _____
 Collection Method: _____
 Date and Time Filtered (if applicable): N/A
 Field Measurements: pH _____ Temp: _____ Cond: _____ Turbidity: _____
 Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 6.15.95 1540
 Sampling Depth: 8'-10' BLS
 Sampling Method: GEOPROBE SOIL SAMPLER WITH LINER
 Comments: _____

Sampling Form

(Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
 Sampling Crew: P. FERRON, M. CRAMER
 Sampling Point Number: GS13-3-1
 Sampling Location: SITE 13
 Sample Type: ☐ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____
 Date and Time Sample Collected: 6.15.95 1622
 Weather Conditions: PARTLY SUNNY, WINDY

Purging Information (if applicable):

Method: _____
 Quantity of Water Purged: _____
 Disposition of Purge Water: _____
 Date and Time of Purging: Start: N/A End: _____
 Comments: _____

Groundwater:

Date and Time Collected: _____
 Sampling Depth: _____
 Water Level: _____
 Sampling Method/Equipment: _____
 Field Measurements: pH _____ Temp: N/A Cond: N/A Alkalinity: _____
 Date and Time Filtered (if applicable): _____
 Comments: _____

Surface Water:

Date and Time Collected: _____
 Collection Method: _____
 Date and Time Filtered (if applicable): _____
 Field Measurements: pH _____ Temp: N/A Cond: N/A Turbidity: _____
 Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 6.15.95 1622
 Sampling Depth: 2-4' BLS
 Sampling Method: GEOPROBE SOIL SAMPLER WITH LINER
 Comments: _____



An Employee-Owned Company

Sampling Form (Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
Sampling Crew: P. FERRON, M. CRAMER
Sampling Point Number: GS13-3-4
Sampling Location: SITE 13
Sample Type: ☐ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____
Date and Time Sample Collected: 6.15.95 1720
Weather Conditions: PARTLY SUNNY, WINDY

Purging Information (if applicable):

Method: _____
Quantity of Water Purged: _____
Disposition of Purge Water: _____
Date and Time of Purging: Start: N/A End: _____
Comments: _____

Groundwater:

Date and Time Collected: _____
Sampling Depth: _____
Water Level: _____
Sampling Method/Equipment: N/A
Field Measurements: pH _____ Temp: N/A Cond: _____ Alkalinity: _____
Date and Time Filtered (if applicable): _____
Comments: _____

Surface Water:

Date and Time Collected: _____
Collection Method: _____
Date and Time Filtered (if applicable): N/A
Field Measurements: pH _____ Temp: N/A Cond: _____ Turbidity: _____
Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 6.15.95 1720
Sampling Depth: 8'-10' BLS
Sampling Method: GEOPROBE SOILSAMPLER WITH LINER
Comments: _____

Science Applications International Corporation ■ 1710 Goodridge Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book

Sampling Form (Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
 Sampling Crew: P. FERROU, M. CRAMER
 Sampling Point Number: GS13-4-2
 Sampling Location: SITE 13
 Sample Type: ☐ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____
 Date and Time Sample Collected: 6.15.95 1800
 Weather Conditions: PARTLY SUNNY, WINDY

Purging Information (if applicable):

Method: _____
 Quantity of Water Purged: _____
 Disposition of Purge Water: N/A
 Date and Time of Purging: Start: _____ End: _____
 Comments: _____

Groundwater:

Date and Time Collected: _____
 Sampling Depth: _____
 Water Level: _____
 Sampling Method/Equipment: _____
 Field Measurements: pH _____ Temp: N/A Cond: _____ Alkalinity: _____
 Date and Time Filtered (if applicable): _____
 Comments: _____

Surface Water:

Date and Time Collected: _____
 Collection Method: _____
 Date and Time Filtered (if applicable): _____
 Field Measurements: pH _____ Temp: N/A Cond: _____ Turbidity: _____
 Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 6.15.95 1800
 Sampling Depth: 4-6' BLS
 Sampling Method: GEOPROBE SOIL SAMPLER WITH LINER
 Comments: _____



An Employee-Owned Company

Sampling Form

(Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
Sampling Crew: P. FERRON M. CRAMER
Sampling Point Number: GS13-4-4 ; GS13-4-5
Sampling Location: SITE 13
Sample Type: ☐ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____
Date and Time Sample Collected: 6.15.95 1820 ; 1840
Weather Conditions: PARTLY SUNNY, WINDY

Purging Information (if applicable):

Method: _____
Quantity of Water Purged: _____
Disposition of Purge Water: _____
Date and Time of Purging: Start: N/A End: _____
Comments: _____

Groundwater:

Date and Time Collected: _____
Sampling Depth: _____
Water Level: _____
Sampling Method/Equipment: _____
Field Measurements: pH _____ Temp: N/A Cond: _____ Alkalinity: _____
Date and Time Filtered (if applicable): _____
Comments: _____

Surface Water:

Date and Time Collected: _____
Collection Method: _____
Date and Time Filtered (if applicable): _____
Field Measurements: pH _____ Temp: N/A Cond: _____ Turbidity: _____
Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 6.15.95 1820 ; 1840
Sampling Depth: 8'-10' BLS
Sampling Method: GEOPROBE SOIL SAMPLER WITH LINER
Comments: GS13-4-5 IS A DUPLICATE SAMPLE OF GS13-4-4

Science Applications International Corporation ■ 1710 Goodridge Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book

Sampling Form

(Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008

Sampling Crew: P. Ferron, T. Bugg

Sampling Point Number: MW 13-01

Sampling Location: Site 13

Sample Type: ☒ GW ☐ SW ☒ Soil ☐ SED ☐ Other: _____

Date and Time Sample Collected: 07-13-95 17:00

Weather Conditions: Very hot >100°F, Wind from South, a few Clouds

Purging Information (if applicable):

Method: _____

Quantity of Water Purged: _____

Disposition of Purge Water: _____

Date and Time of Purging: Start: _____ End: _____

Comments: _____

Groundwater:

Date and Time Collected: _____

Sampling Depth: _____

Water Level: _____

Sampling Method/Equipment: _____

Field Measurements: pH _____ Temp: _____ Cond: _____ Alkalinity: _____

Date and Time Filtered (if applicable): _____

Comments: _____

Surface Water:

Date and Time Collected: _____

Collection Method: _____

Date and Time Filtered (if applicable): _____

Field Measurements: pH _____ Temp: _____ Cond: _____ Turbidity: _____

Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: 07-13-95 17:00

Sampling Depth: 12 to 14 ft

Sampling Method: Shelby Tube

Comments: _____



An Employee-Owned Company

Sampling Form

(Field Sheet)

Project Name and Number: SDANG SI 01-0827-04-3423-008
Sampling Crew: P. Ferron, T. Bugg
Sampling Point Number: MW1-13-01
Sampling Location: Site 13
Sample Type: ☒ GW ☐ SW ☐ Soil ☐ SED ☐ Other: _____
Date and Time Sample Collected: 07-18-95 11:10
Weather Conditions: Sunny, wind from North, Temperature 80's to 90's

Purging Information (if applicable):

Method: Bailer
Quantity of Water Purged: 10 gallons
Disposition of Purge Water: Disposed of down sanitary sewer
Date and Time of Purging: Start: 10:49 End: 11:10
Comments: _____

Groundwater:

Date and Time Collected: 07-18-95 11:10
Sampling Depth: 8 to 11 ft
Water Level: 8.05 ft
Sampling Method/Equipment: Disposable polypropylene bailer
Field Measurements: pH 6.50 Temp: 63.40°F Cond: 1476 Alkalinity: NR
Date and Time Filtered (if applicable): NA MS/cm
Comments: _____

Surface Water:

Date and Time Collected: _____
Collection Method: _____
Date and Time Filtered (if applicable): _____
Field Measurements: pH _____ Temp: _____ Cond: _____ Turbidity: _____
Comments: _____

Soils/Sediment Sampling:

Date and Time Collected: _____
Sampling Depth: _____
Sampling Method: _____
Comments: _____

Science Applications International Corporation ■ 1710 Goodridge Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book



An Employee-Owned Company

Well Development Form

(Field Sheet)

Project Name and Number: SDANG 01-0513-04-3423-008

Well Number and Location: MW13-Q1

Development Crew: Pete Ferraro / Tracy Kays Driller (if applicable): Lyle Porter / Mark Lesly

Water Levels/Time: Initial: 8.02 Pumping: unable to get reading Final: 8.02
water level meter too high

Total Well Depth: Initial: 19.48 Final: same

Date and Time: Begin: 7/16/95 @ 1205 Completed: 1333 @ 7/16/95

Development: Method(s): bailer w/ rope to get PVC shavings etc (PVC bailed by hand 1990)
Grundofus RediFlow pump

Total Quantity of Water Removed: ~175 gal (95 well volumes) gals
1.83 gal / well volume

Date/Time and Pump Setting	Discharge Rate* and Measurement Method	Field Measurements				Remarks (Including Sand Production)
		Temp (°F)	Specific Conductivity (µmhos/cm)	pH (Standard Units)	Turbidity	
7/16/95 1205	4 GPM Grid bucket	66.7 F	1780	6.25	Very	PVC shavings
1225	2.5 GPM "	60.8 F	1190	6.27	Greys clay	3 ft off bottom (18")
1234	" "	63.0 F	1070	6.51	Grainy clear	16 ft
1243	" "	61.8 F	1090	6.50	Tanish clear	14 ft
1254	" "	60.9 F	1060	6.90	clear	12 ft
1300	" "	62.1 F	1010	6.65	clear	12 ft
1305	2 GPM "	62.4 F	960	6.43	clear	18 ft
1325	" "	61.3	962	6.45	clear	16 ft
1333	" "	61.1	963	6.41	clear	16 ft
						Developed.

*gallons per minute or bailer capacity

Science Applications International Corporation ■ 8400 Westpark Drive, McLean, Virginia 22102

White: File Pink: Field Manager Yellow: Supervisory Geologist Goldenrod: Field Book

APPENDIX L. FIELD LOGBOOK

THIS PAGE WAS INTENTIONALLY LEFT BLANK

PAGES 106 THRU 147 WERE INTENTIONALLY LEFT OUT

PER: PAT PATELL

(703) 749-8903

SCIENCE APPLICATIONS INTERNATIONAL CORP

(SAIC)

McLEAN, VA.

ING
REAS

3

EDDYNE

16

ANSIT BOOK

Joe Foss Field SDANG

INDEX

Property of SAIC

01-0513-04-3423-

Address 655 Metro Place S, Suite 745

Dublin Ohio 43017

Telephone (614) 793-7600

This Book is manufactured of a High Grade
50% Rag Paper having a Water Resisting Surface,
and is sewed with Nylon Waterproof Thread.

Page 149 M + TE Inventory
150 M + TE Equipment Calibration

5 95
6-56 PM

3

1300 Met with Captain Alvin Punt
of SDANG, Joe Foss Field
discussed ① the storage area available
for SAIC ② storage area for pallet
of benzonite of Targot (Subcontractors
for SAIC for SPV and Greypose) ③
took a look at Areas 12 + 13 and
discussed the dimensions of each
site and the drawings in the
Work Plan ④ Using Base Traffic cones
to delineate Work Zones
we looked at Utility drawings and
"As Built" drawing to try to locate
utilities

Captain Punt arranged to meet utilities
tomorrow at 7 AM and should be
completed by Noon
1500 left site to check in Mel
Wentzier and Humid

6-6-75

3

8:30 AM - Called Chambers to find out status of per change orders

9:00 - Met with Captain Rand

Discussed following


- ① Use of Cellular Phones on Base
 - ② Use of Camera
 - ③ Any Warning Signs
 - ④ Access to Copy Machine on Base
 - ⑤ Storage of Equipment during period (3-4 weeks) between sampling events
 - ⑥ Use of base generators - No
- 11:00 Went Back to Motel to make phone calls

6-6-95

1345 Met Glyn Punt at Area 13
Discussed which site to start at for
tomorrow - decided on Area 13
He stated that he would like a meeting
with us, subcontractors and Fire and
Security from Base for briefing tomorrow
AM. He would check into the time
availability for the meeting. He was
going back to Area 12 for utilities
clearance and then back to his office.
We decided that Area 12 would be
best to work on from Fri thru Mon
because they were "No Fly Days".
When working on Area 13 we were
requested to work on the East or
West side one at a time so that
there would be the availability of the
pumps to the base vehicles. Martha
Cramer and I set out a grid
around the pumps at 20 foot intervals
to give a reference point for sample
locations tomorrow. The first Row east
of the pumps is too close to the storm
sewer line and will need to be moved further
west also the electrical line from the


6-6-95


Building 11 to the pumps will probably need to be relocated - the reference point for measuring the grid was the brass plate in the island on the west side of the middle pump. Stopped by to talk to Coln Hunt and set up a time of 11 AM for a meeting with Base Security and Fire Dept for briefing left base about 330 AM weather hot and humid

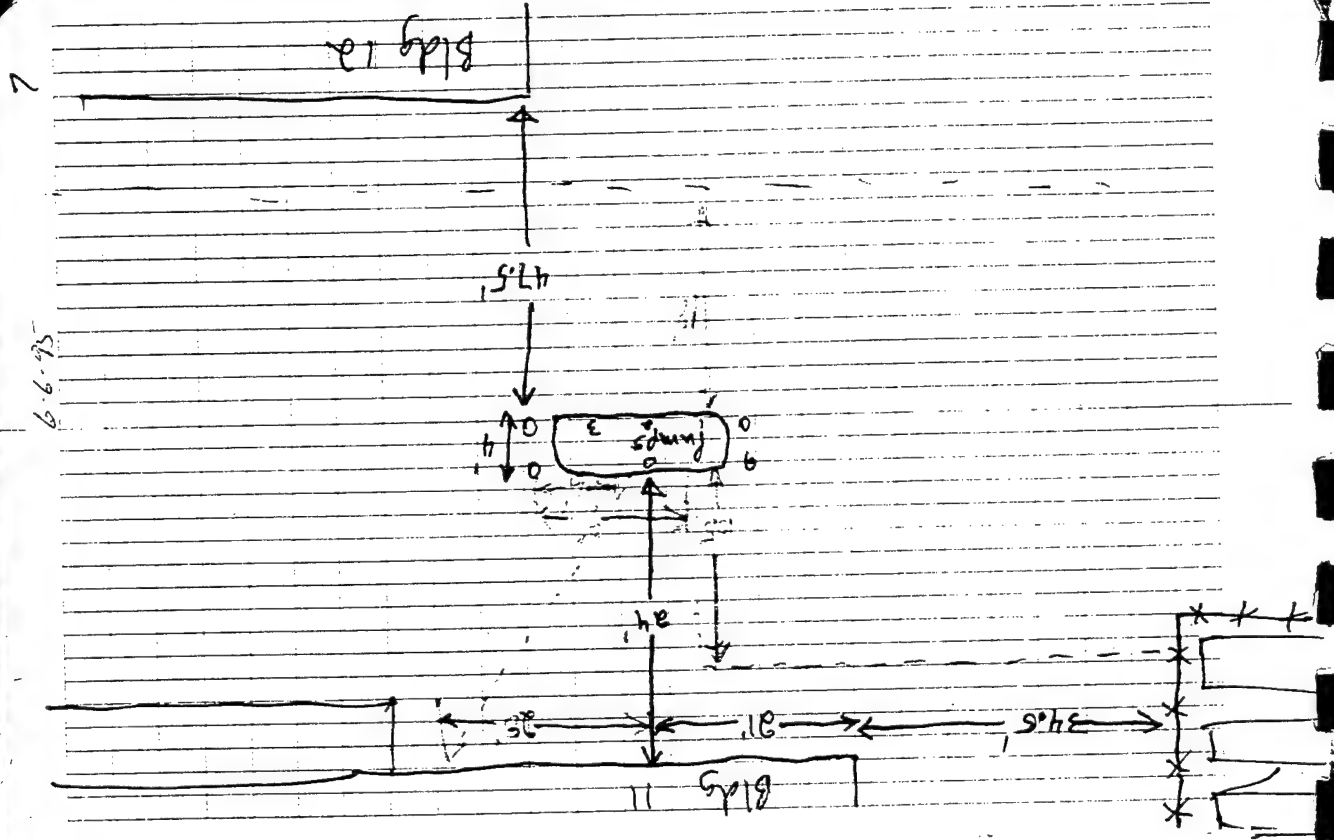

6-6-95

20 ft intervals

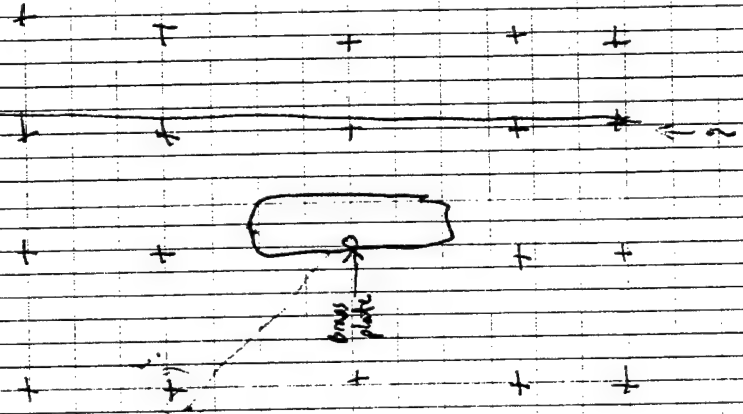

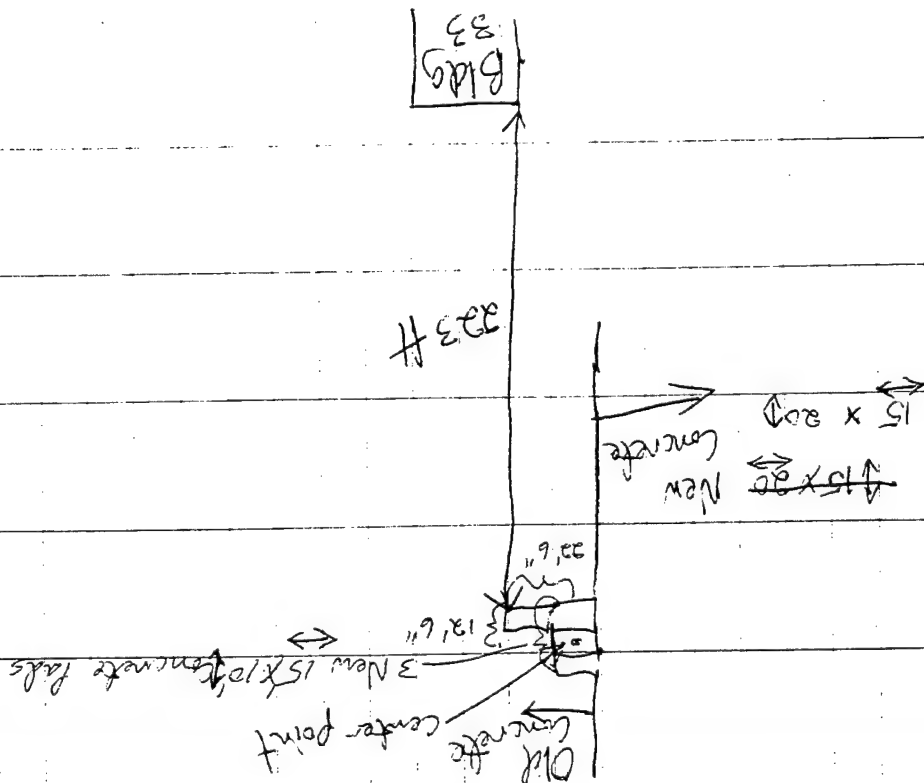Area 12

0730 met Target in front of motel
David Sterling said that they will not have
VDA vials but will get them tomorrow
Priority shipping proceeded to Base for
BAM Health and Safety Briefing

0805 Site Specific H&S Briefing
given - Outline of topics
discussed is included in
the files

Attended by
David Greener
~~David Greener~~

Jeffrey E. Atkins

Peter J. Ferraro

Given by Martha Carter - ~~Martha Carter~~

10:35 Proceeded to Areas 12 + 13 to look
at sites. We put out traffic cones at
Area 12. Proceeded to Area 13 and
discussed work strategy for tomorrow.

12

will probably sample every other grid point (soft intervals). Target needed to make phone calls for rental of rock drill. Meeting with Base Security and Fire Dept. is pushed back to 1 PM.
Discussed Sample analyses with Target - question on work plans. discussion of SUV sampling also states that GW samples (20) and when these samples will be taken.

1300 Meeting with Mike Hanger - Base Fire Dept.

EMAS 9-911

Welding Permit Each Day

15 mph DN Base

5 mph By Air planes

Slow over Ramp.

Restricted Area need Escort

Red lined Area

* list of people

Hours

Vehicles - license plate that Marking on side

FOP - mud Dirt Rocks

13

Wear seat belt
Proof of Insurance in Vehicle
O = Main Gate Base Phone - Variations in Hours
Weather (cloudy, cooler)
Completed Meeting
Discussed FAX from Intel Re: # of GW Sample at Area 13
Provided list of people Vehicles etc to Captain Punt
Checked Receipt of supplies
Found HNU was shipped to Dublin OH
It will be shipped overnight to SPARKS
Joe Fass.

1500 Proceeded to Range Area 17 to 508

up Grid

1630 Left Base

16

water came into the probe and a soil gas could not be obtained - four samples collected at interval

1130 set-up for SG-3 West of the pump
island Completed 1200 And left for
Lunch - first to Bldg 47 - talked to

under - first to bidy 47 - talked to
certain plant and we left house for

Rainy lunch at 1330 Arrived back on Base
+ 1200m alt. to Area 13 and set up

SDV hole 564 at 134/D
Jeff from the

Mobile Lab said that there was slight "hit on" the first hole for "methane"

M_e because he said it would be a mixture of ethane, methane, butane, and methane. The first idea

At 564 the tip slipped off the end of the

code so they moved over and started a new

hole S64 is on the ~~left~~ side of the pump is hole south

14/5 started 56.5

started 3000
Complete 565 and filled holes with

Bestmite and Occident Hotel to May 47

at 555 prior to filling hole HNU readings


were taken down the holes and readings were

the same as back of hand

1. What is the purpose of the study?


17

6-9-95

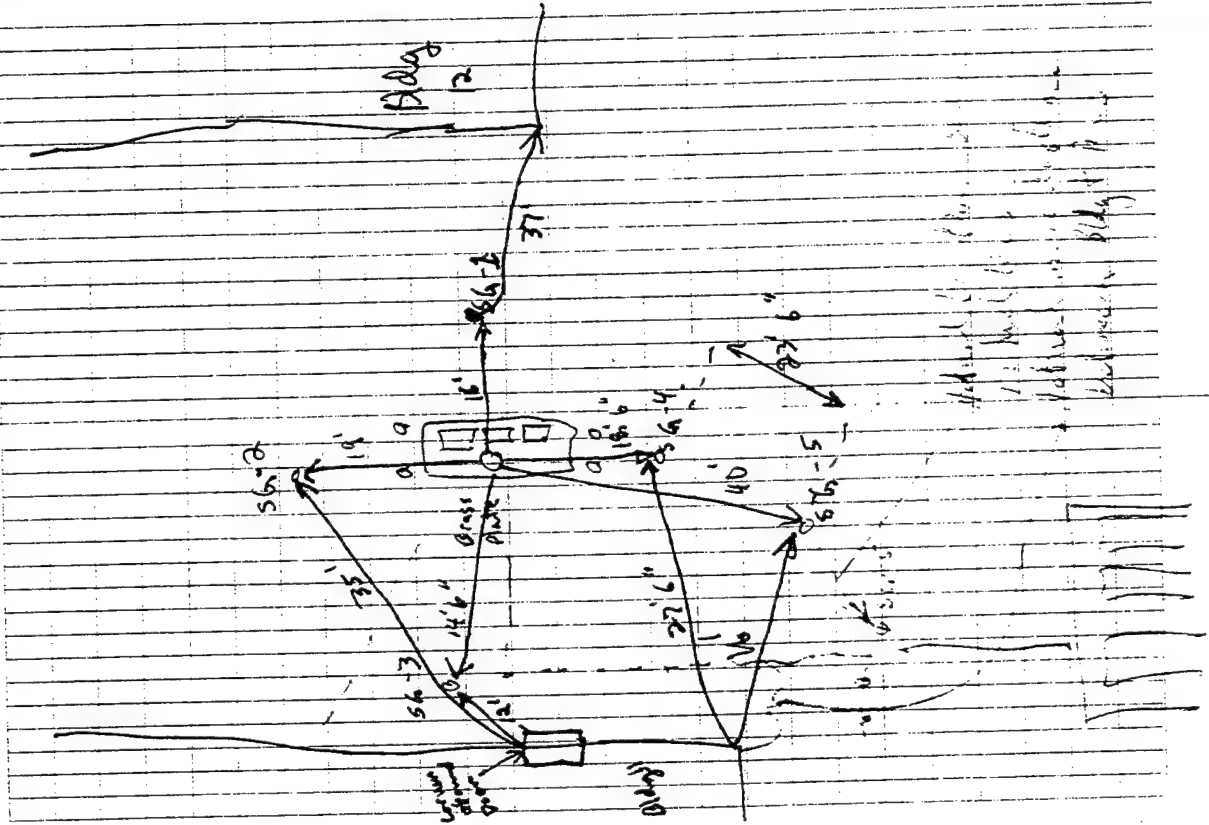

18

6-9-95

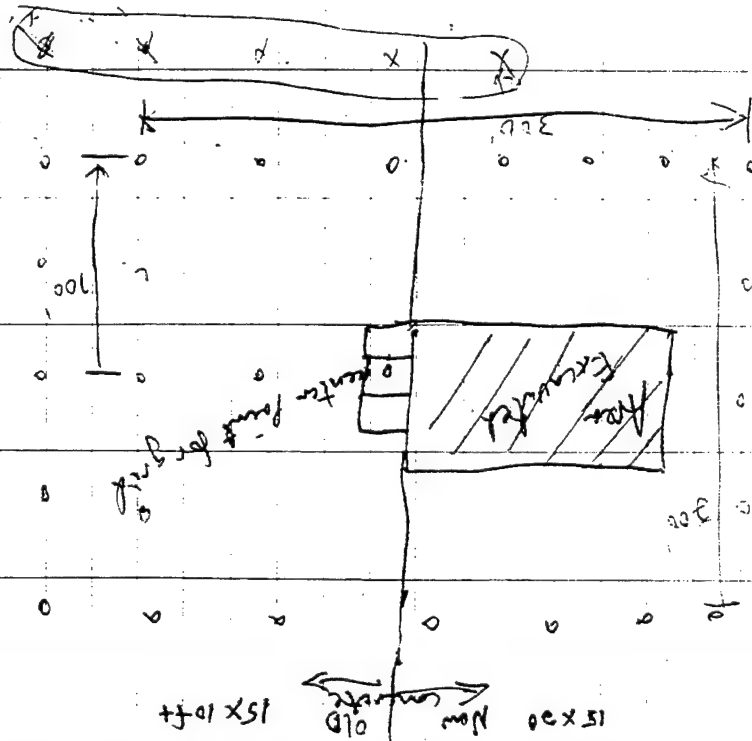

19

6-9-95

7:30 Arrived on Base Met Captain Punt and Dave Sterling and bring from Target Notified Capt Punt that the screening results from Area 13 SDV samples were detecting "Methane" Martin and I went over to area 13 to get measurements of distances for SDV locations see map 18.17 proceeded back over to Area 12 to meet target at 8AM

0815 Hqs briefing

Safety Glasses

Thurston

2nd Lt

(Signature)

(Signature)

(Signature)

0825 started hole in concrete

Talked to Punt and Capt Punt Office

Hayley James Williams

FAX

Talked to Capt Punt about sand on grid line

South of grid line discussed yesterday by

initial Pick 5 holes thru concrete on grid

3019 3/6 87 179

8121

22

6-9-95

1430 started Spill at SG12-11

1445 Completed SDV & SG12-11

Started raining hard at 1440

Dave said that it was raining too much to continue so we decided to wait a half hour to see if the rain lets up some

1450 Got Back to Bldg 47 (Civil Engineering Bldg)

1530 the rain did not let up so we decided to stop for the day

6-10-95

23

0730 Arrived on site at Bldg 47

Calibrated HNU

0735 H&S briefing. Topics discussed:

Hearing Protection

Vibration

Given by ~~W. J. C.~~~~W. J. C.~~~~W. J. C.~~

PPK

0750 set up on hole SG12-10 down to 6 ft

0810 completed SG12-10. North + I table

first samples to Mob Lab

0815 took first sample at SG12-9 down to 6 ft

0825 completed sampling + North + I table samples to Mob Lab

0830 set-up on SG12-8 completed to 6 ft

0840 start coring holes in concrete

finish coring holes SG12-12 thru SG12-34

see map page 21

0930 started sampling at SG12-12 to 6 ft

0945 started sampling at SG12-13 to 6 ft

1010 started sampling at SG12-14 to 6 ft

1025 started sampling at SG12-15 to 6 ft

1045 started sampling at SG12-16 to 6 ft

Moved sample locations SG12-17 and SG12-18

24

6-10-95

to the NE and SW to give a total
clearance for the water line - Drilled
2 more holes in concrete

Set upon 5612-17 at 11:20

Completed sampling at 11:45
to mob lab

1200 Bake for lunch

1300 Arrived back at mob lab

No new hills ~~at~~ samples

Proceeded to Area 12 set up grid on interior of the perimeter numbering locations in a "fashion" from 21 thru 35 see

Scrub

1320 completed sampling at 5612-19 to 6 ft

when pulling in, the SOV rods a hydrocarbon smell was noted the t/NM was placed over the hole when the rods were pulled and measured 50 ppm. (calibrated to benzene)

1325 5612-20 sampled down to 6 ft

5-31-20 Sampled around 10:00 AM.
HNI Reading: Spine as backguard off.
Drilled holes thru concrete for 81 thru 257.


Completed Sampling at
S610-12 and 1430-66H

1500 (smaller) 56.13.22 12 LF

1510 started 5/12-23 to 6/11

25

6-10-95

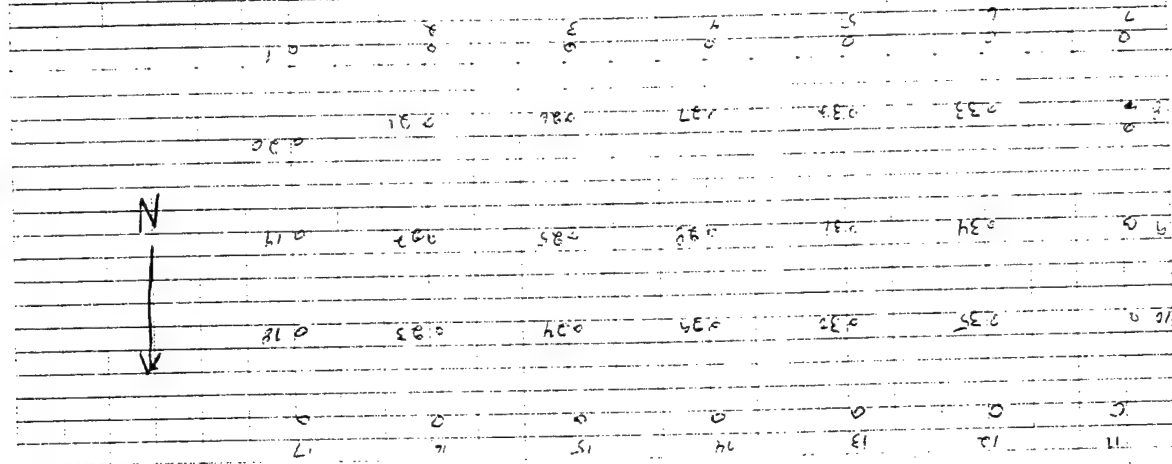

26

6-10-95

1530 Started Sampling 5612-24 to 6 ft
 1550 Started Sampling 5612-25 to 6 ft
 1610 Completed Sampling at 5612-25 and headed back to Mob. Lab. This was all the samples that the Lab could handle today.
 1630 After hooking up reedger to HNU and talking to Jeff in Mob. Lab. we left the base. Martha & I relayed samples to the Mobile Lab throughout the day.
 Ambient temperature ranged from low to high 40's. Wind direction from NW to NE.

27



6-11-95

Sunny No Clouds
 Arrived at Base at 0730. Collected HNU and Spike with Jeff about Lab Results from yesterday only. Hit was at 6 on 19. Spoke with Captain Hunt (called at home) informed him of the hit on the east side of perimeter in the middle and that we were going to continue to fill in the grill and around hits.
 0810 Safety Briefing Topic Emergency Procedures Given by Captain Hunt
 0810 After safety briefing started 5612 down to 6 ft
 0820 Started 5627 down to 6 ft
 0830 Completed 5627
 0835 Started Coring holes thru concrete 5628
 0905 Completed sample concrete coring thru 5635
 0910 Started Sampling at 5628 down to 6 ft
 0930 Set up on 5629 down to 6 ft
 0945 Started Sampling at 5630 down to 6 ft
 1010 Started Sampling at 5631 down to 6 ft
 1035 Started Sampling at 5632 down to 6 ft
 1100 Started Sampling at 5633 down to 6 ft
 Martha & I Market 5636 thru 5644 around 5619
 1115 Started Sampling at 5634 down to 6 ft

22

56711-7


rechecked due to water line

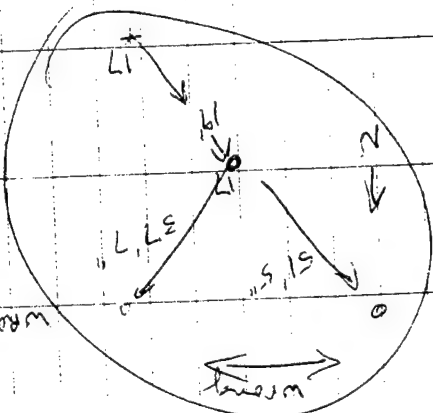

6-11-95

6-11-95

1300 Met Jeff at Mob Lab
No more hits - he has just won SG34
and about to start SG35
1315 Started concrete drilling around
SG19 grid points 36 thru 44
1330 Started sampling at SG36 to 6ft
1340 Started sampling at SG40 to 6ft
1415 Started sampling at SG41 to 6ft
1430 Started sampling at SG38 to 6ft
1450 Started sampling at SG39 to 6ft
1530 Completed sampling at SG37 to 6ft

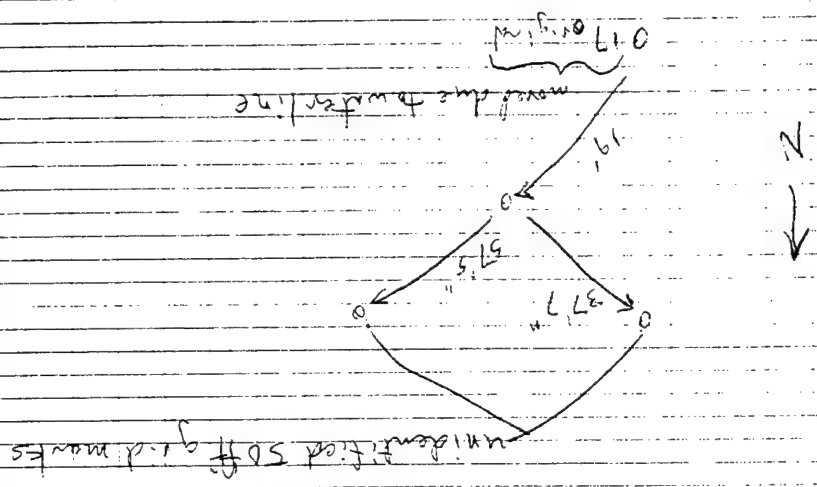

32

6-11-95

1530 to 1555 Cored SG 43 thru SG 45 thru concrete

1600 started sampling at SG 44

1630 completed SG 44 to 6 ft and heaped


Back to the Mobile Lab. decided to

stop sampling for the day

1645 left Base


6-11-95

33

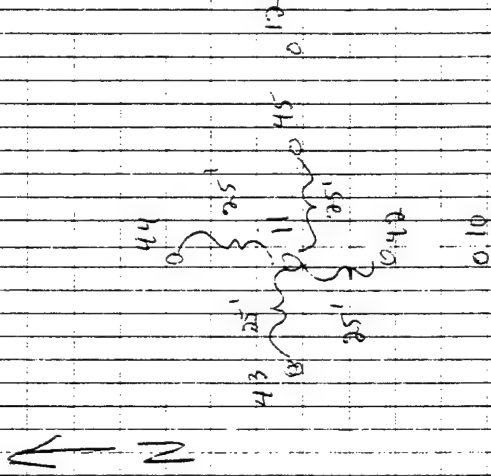

34

6-12-95

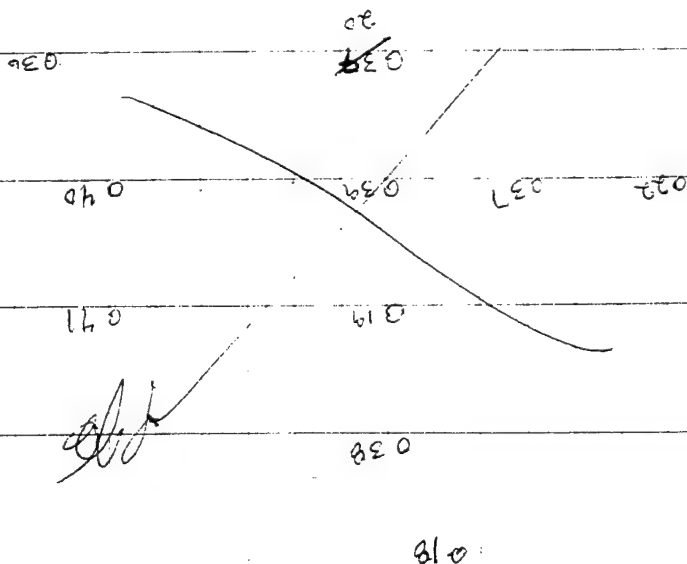

35

6-12-95

0730 Made Numerous Phone Calls Regarding Purchase orders
 0750 Went to Lab to get Cooler and talk about getting pH, Conductivity and Trip Blankets
 0815 Went to Base. Made some more phone calls regarding purchasing and Trip Blankets
 Told Jim Mobley said that it would take a few hours to set up for soil analysis
 I told him that we expect to finish about 8:00 am

0945 H4 ← Base Camp

Topic discussed: Hectares
 Greenhouse, Mammals, Crea

John Penner
 (Signature)
 (Signature)

0950 Started Sampling at S6, 12-43
 S6, 12-42 was completed by Target Prior to 0950 - Maria and I were setting up more grid point around points 19 and 37

1010 Completed S6, 12-45 Row - to 6A

Sunny No clouds

Marked I added S6, 12-46 thru S6, 12-50 around Grid point S6, 12-19 and S6, 12-37

See map page 37

36

6-12-95

1030 Target concrete for SG 46 thru SG 50
 1040 Started Sampling at SG 48 to 6 ft finished Sampling at SG 48 and the HNU reading down the hole was 20 ppm
 1055 Started Sampling at SG 47 to 6 ft HNU Reading down hole 6 ppm SG 47
 1115 Started Sampling at SG 50 to 6 ft HNU Reading down hole 4 ppm SG 50
 1130 Start sampling at SG 46 to 6 ft HNU
 1200 Completed SG 46 HNU = 1 ppm Went to Mob, Lab. Discussed approach to Soil sampling - Target was under the impression that only 3 samples would be taken and not continuous sampling
 1230 Went to lunch
 1330 Prepared Bottles
 Mobile Lab Meets the Rest of Day to finish Soil Gas samples and switch over to screening soils for tomorrow
 Need Sample Results to determine Geoprobe Soil Sample locations
 1530 Leave Base

6-12-95

37

036

040

041

Wire

080

039

049

019

048

039

018

046

037

047

080

39

6-13-95

0720 Talked to Alan Klavan about Geoprobe locations on Pump Area 12 - decided on four locations with a possibility of expanding to six two in hit areas two just N of Excavated Areas

0845 Arrived on Base discussed with Captain Plant Sample locations and after talking with the state "EPA DNR decided to take an additional Marked the locations Went to get Ice


Took Equipment Blanks see pages 40+41
1115 Set up and First Geoprobe site and took first sample two holes need to be put through the concrete to obtain sufficient volume for analysis

one sample will go to two BTEX bottles for offsite lab and the second will go to the onsite lab sample and TPN offsite sample bottle

Sunny, Partly cloudy, Windy from South Ambient Temp N 80 Logging of sample in other log books

G503
⊕
18

Area 12

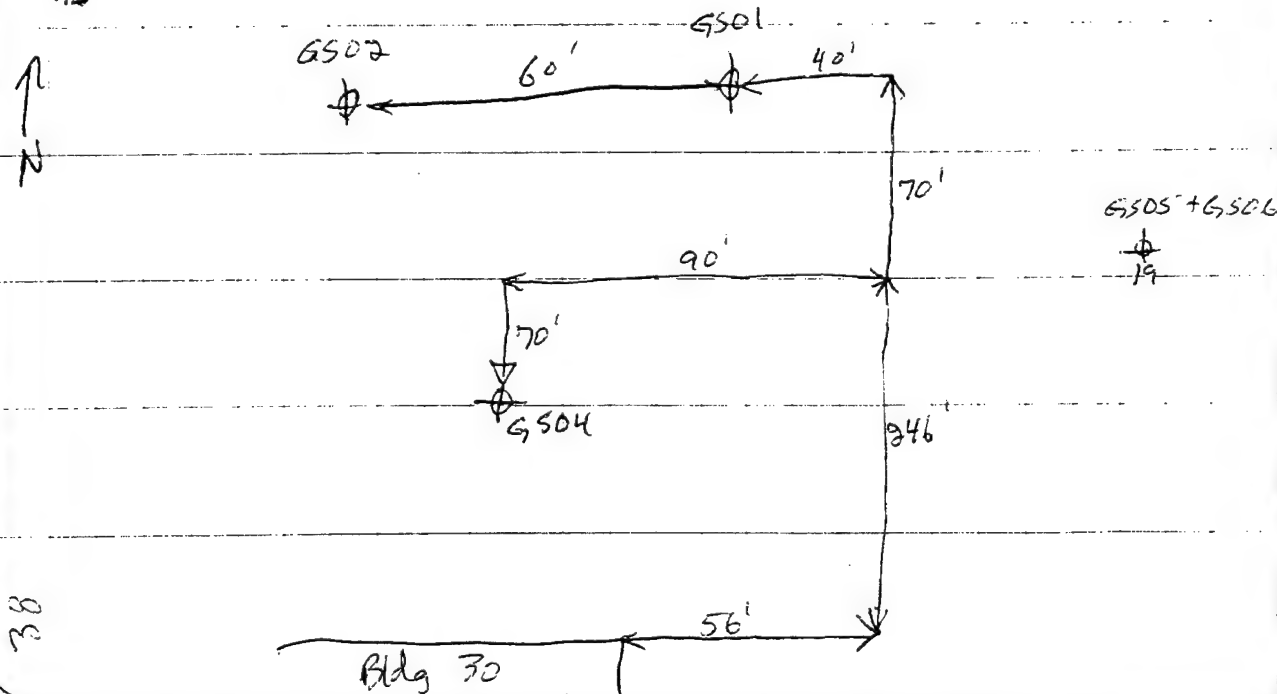

38

410

6-13-95

Time

1040

1040

1115

1145

1205

0800

0800

1340

1345

1425

1430

1445

1520

1535

1550

1600

1615

1717

1727

1737

1740

1810

1830

1840

1855

Duplicate

Duplicate

1905 GS06-1 2-4 ft → d

1915 GS06-2 4-6 ft → d

6-13-95

41

EBD1	Geoprobe	Soil	Equipment Blank
EB02	Geoprobe	Water	Equipment Blank
GS01-1	Geoprobe	Soil	2-4 ft
GS01-2	Geoprobe	Soil	4-6 ft
GS01-3	Geoprobe	Soil	6-8 ft
TB01	Tripp Blank	Hit water at 8 ft	
TB02	Tripp Blank		
FB01	Field Blank	Portable Water	
FB02	Field Blank	ASTM TYPE II water	
GS02-1	Geoprobe	Soil	2-4 ft
GS02-2	"	"	4-6 ft
GS02-3	"	"	6-8 ft hit water
GS03-1	"	"	2-4 ft
GS03-2	"	"	4-6 ft
GS03-3	"	"	6-8 ft hit water
Went back to drum			
Target went to check			
GS04-1	Geoprobe	Soil	2-4 ft
GS04-2	"	"	4-6 ft
GS04-3	"	"	6-8 ft hit water
GS05-1	"	"	2-4 ft
GS05-2	"	"	4-6 ft
GS05-3	"	"	6-8 ft hit water
Completed sampling			
			headed to Mob Lab

4/2


6-13-98

Feel the samples some more
hooked up HNU
discussed sampling approach for
tomorrow morning decided to
start GW sampling in area B
for screening samples left site
at 1945

43

6-14-98

0730 picked up some cones from Ramp
went to Area 13 to set up a grid
see page 45 - Also picked a soil gas
location Between posts sunny little wind
0805 A/S Briefing
Topic discussed PE Requirements Circulation
Given by To/From 7
Albuquerque



0815 Sample take for soil gas at SG13-6 at 2 feet
0820 " " " " " 4 feet
0830 " " " " " 6 feet
0835 PVC screen put in SG13-1
0845 " " " " " GW13-2
0855 " " " " " GW13-3
0915 " " " " " GW13-4
1045 Deliver of Samples to Lab Collected 6-13
1100 Arrived Back on site
Made some phone calls Dine
Drew a few Maps Regarding Area 13 Locations
1300 Went to lunch

44

1320

6-14-95

Back from Lunch

Talked to Alan Kavans about the depth of the soil samples in Area 13. He said to go to ground water but not then to 20 BPS.

Talked to lab about more soil

sample bottles for Area 13

Picked-up bottles at lab

Went back to Area 13 to see how

the Target are coming with the

samples for screening

Decided to let three holes sit overnight to see if produce any more water

for analysis

1730

Talked to Jeff in Mobile Lab about

quantity of sample for analysis

After the three groundwater samples that

have low production (11, 12, 15)

the ones with two VOA vials will

be sufficient for analysis and #12

will have enough for BTEX and solvent

screen - but not TPH we decided it

is not worth going back to in the


Morning - #10 was missed - will get in still

left Base

1745


45

6-14-95

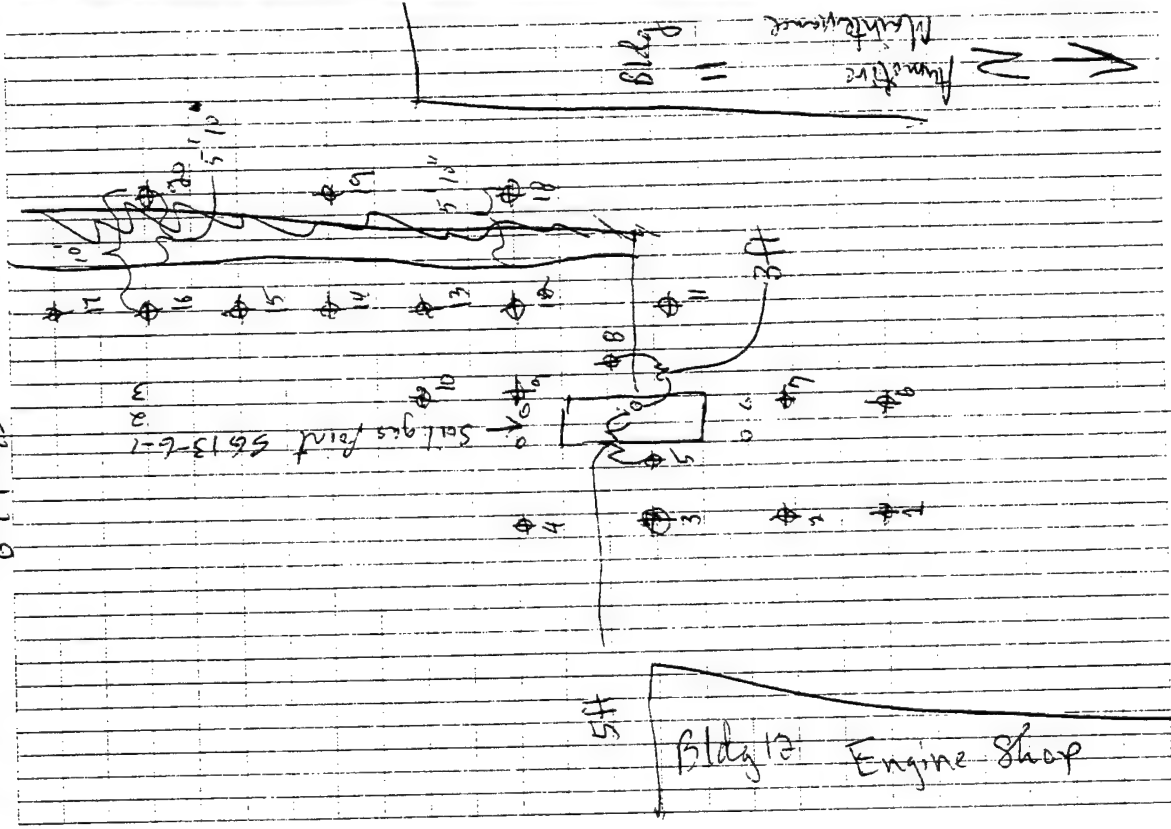

416

6-15-95

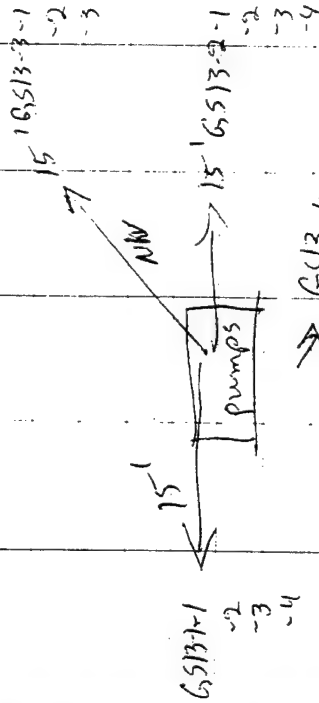

GS13-4-1
Just damaged
couple ft

down to water table
2 ft intervals



6-15-95

417

Arrived on Base talked to Jeff (Mob Lab) - Was not able to do THM on GW Sample Area 13. Targeted - Sampled last GW Area 13 3 points had BTEX hits Area 13 all right around the pumps - Faxed diagrams to Alan Klavins (and talked to Alan and Pat about progress) discussed soil sample locations for geophysics in Area 13. Alan called back after receiving FAX and decided on location as on page 416 15' North, South, and North West and one is a couple of feet away from point where there was a hit


Alan Klavins

15' North, South, and North West

GS13-4-1

Given by: M. J. ...

Attended by: ...



Man ...

Took Martha out to Area 13

48

6.1.75

1045 SETTING UP ON GWS05 to take Groundwater Samples

1048 CALIBRATE HYDAC.

1047 Drilled to 12 feet, Screens

Set at 10' to 12' BLS

1024 BEGIN SAMPLING GWS05

AND GWS06. GS-46, 16 A DUPLICATE

SAMPLE OF GWS05.

1112 Finished Sampling GWS05

Fuel Gauge TEMP: 74.6 °F

pH: 6.78

COND: 1221 x 142 µS/cm

1145 Equipment Blank Taken on ground water sampler 1205 go to bank

1300 Equipment Blank Taken for soils at Area 13

1310 Area 13 Set-up for soil sampling

Windy Bother Sunny Windy See Map Page 46

1330 Geoprobe Soil 1-3 depth 50 samples

few drops of Rain GS13-1-1

had to make 3 holes to get sufficient sample

1350 GS13-1-2 3-5 ft

1400 GS13-1-3 5-7'

1410 GS13-1-4 7-9' water

TB03 Trip Blank for Solvents and BTEX

49

6.15.95

1360

GS13-2-1

1-3'

N of Pumps

1505

GS13-2-2

3-5'

1515

GS13-2-3

5-7'

1540

GS13-2-4

7-9'

water @ 8.9 PPM

1622

GS13-3-1

1-3'

NW of Pumps

1640

GS13-3-2

3-5'

1700

GS13-3-3

6-7'

1720

GS13-3-4

7-9'

water

1780

GS13-4-1

1-3'

100% 3

1800

GS13-4-2

3-5'

1810

Duplicate GS13-4-5

9-11'

12.40

1830

GS13-4-3

5-7'

1845

After cleaning up left base

lit water

6-16-95

- 0730 Arrived on Base Sunny Windy
 0740 Target Arrived said they had to
 Return Rock the 11 and would be
 back in 1/2 hour
 0745 Met with Captain Hunt and
 updated him on Area 13 and GWA
 Sampling Area 12
 Packed up supplies in storage
 0835 Target Arrived Back on site
 0840 17 leaves for Huntington LAB
 to take samples.
 0842 Setting up 16 Install "well" at
 GWD 1.
 0940 Began saturation GWD 1
 geonics set from 17012' BS
 0950 dropped off samples collected yesterday
 at Huntington Labs and the HNH
 GWD 1 73.9°F 6.07X100 uS/cm 7.40 pH
 finished sampling at 0950
 0955 Arrived back on Base
 0950 setup to install "well" at GWA 2
 0955 Start Sampling power set from 10 to 12.5
 1000 Finished Sampling
 Temp 76.3°F
 Conductivity

6-16-95

53

1040 Setup on GSW 12-03 Screen set at 10' 12' 13' 15
 0900 TBO4 Trip Blank for BTEX
 1045 CP-5 Cycler Blank for Temperature
 Started Sampling at 6 W 12-03
 1100 Completed Sampling 7:19 PM
 Temp 26.6 °C Inside 4.68 m/sec
 1120 Setup on GSW 12-04
 Screen set 10' 12' 13' 15
 1125 Started Sampling GSW 12-04
 Temp 24.8 °C Conductivity 51,000 µS/cm pH 7.29
 Completed Sampling 1145
 1215 Went to lunch
 Repackaged Samples
 Prepared Fed Ex Shipment - Hazco
 Ticked to Captain Hunt Regarding 13
 patching at the Lamp and Area 13
 He would check to see if it was to
 his satisfaction
 I talked to the Target & told them that
 they were not to leave until Captain
 Hunt was satisfied with the patching
 1420 Dropped off samples at Fed Ex Lab
 (Huntingdon) and then to Fed Ex
 Martha dropped me off at the Airport 15430
 call 430 flight. Martha was going back to Base
 to check on the progress of the patching by Target

7-10-95

55

Arrived on Base at about 1300 met
with Captain Hunt to find out how
things were progressing as far as
clearances. He said that he had not
made the call yet, was just going to.
We discussed location of Decm pad, water
supply, drum staging, and equipment
staging area.
Checked through Equip. and Bottle supply
Called - Virginia Inst. Hummingdon Labs
Re: More Coolers, Excess bottles, Trip
Blanks, # of Bottles Required per
sample, CO₂ Seals

Made Numerous Phone Calls Regarding Rental
of Truck and Generator
Weather Sunny Hot
Called Jim NW Concrete 589-5700. Res. Start
of Concrete Drilling and # of holes
He thought 14 I referred him to Pat
Capt. Punt. Raised question of specifications
of the cast Iron Flush mount Cap
for the Wells and last requirements
that had to be met for Caps on the
rump. He feels need for special Order
Return 7-10-95

7-10-95


56 Previous Cops - from Municipal Coking Inc.
Madison, MN (612) 598-75-47, FAX# (612) 598-7632 - wheel load 58,000 lbs, 504, 5041A casing

Marked locations for Piezometers with Captain Hunt left Base at 5:30 PM


P201

Ramp

P203



P202



P200 7-10-95

7-11-95

0800 T. Bagg & P. Horn arrive on site (Base) get a Big 47 - work on Safety Briefing etc. Check Vehicle for P.D. Talked to P.D. Plan to leave wells on Ramp open until get the right flush Mount casings and have them installed at a later date. Captain Hunt said Utilities will probably be cleared for the one North of the ramp this afternoon

0930 Called Lynx Western Re: Where are drilling was told that they were to call the office at 10 AM He had expected that they were already on site

Leakhead Bottle for GW 5000 EP 62500
Hatzco - Honda generator
Converter Spect 330 Volt
Volt Single phase $\pm 10\%$
50-60 Hz $\pm 2\%$
Pump Current 10 AMPS
175 Volt

Single Phase 115 $\pm 10\%$
50-60 Hz $\pm 2\%$
Max Current 16 AMPS

Utilities arrive on site

Pete Horn 7-11-95

11/27/95
7-44-95

01330 Health and Safety Briefing - Site Specific with Drillers and Tracy Bagg given by Pete Feram completed 0230pm Health and Safety Training and Requested OSHA Documentation and Broom up the Decon area and patch the hole in plastic

1430 Received OSHA Doc in part (Need 40hr documentation)

1440 Received OSHA Doc for 40 hrs

1450 Pivoted back to site after discussing beached samples with Pat - responsibility of Kayne Western to take samples and analyze and provide bottles -- Will use Shelby tubes from 6 to 8 ft

1505 Setup on site of PZC 1

1530 First split sample from 0 ft 2" diam HNM

1540 3rd SS 2-4 ft

1545 3rd SS 4-6 ft

1550 3" diameter 1-8 ft

1600 4th SS 8-10 ft

1605 5th 10-12 ft

1630 1th 12-14 ft

1625 7th SS 14-16 ft

1700 Start to put in the Piezometer

01330 Health and Safety Briefing - Site Specific with Drillers and Tracy Bagg given by Pete Feram completed 0230pm Health and Safety Training and Requested OSHA Documentation and Broom up the Decon area and patch the hole in plastic

1430 Received OSHA Doc in part (Need 40hr documentation)

1440 Received OSHA Doc for 40 hrs

1450 Pivoted back to site after discussing beached samples with Pat - responsibility of Kayne Western to take samples and analyze and provide bottles -- Will use Shelby tubes from 6 to 8 ft

1505 Setup on site of PZC 1

1530 First split sample from 0 ft 2" diam HNM

1540 3rd SS 2-4 ft

1545 3rd SS 4-6 ft

1550 3" diameter 1-8 ft

1600 4th SS 8-10 ft

1605 5th 10-12 ft

1630 1th 12-14 ft

1625 7th SS 14-16 ft

1700 Start to put in the Piezometer

Pete Feram 7-11-95

60

7-11-95

Truck mounted Hollow stem Auger
Acker Drill Rig

One drum from PZO1 with soil Maked
Soil above and below water

Table Location PZO1
Start Date 7-11-95
Fill Date 7-11-95

Contract

Layne - Western Company, Inc.

Lyle Porter - Driller
Mark Leslie - Driller's helper

~~Attorney~~ Omaha, Nebraska (602) 451-2388
Kenney, Nebraska (308) 334-1914
Sunny very hot

Peter Deen 7-11-95

7-11-95

61

They had to drill to 15' to get well in they lost
their plug at the end (bottom) of first auger

1710 finished sanding up
1720 finished bentonite seal
1725 finished bentonite around

Sanded up to 1 foot above screen
screen 1 foot above water table
bentonite seal 1 foot above screen
bentonite seal and gravel
bentonite seal and gravel
(after use gravel have just bentonite
seal to surface)

1735 loaded up equipment
1745 headed back to Bldg 47
1800 left base

1 Bagged of Bentonite
10 feet screen
35 ft riser

755
1 shelly
Drilled 15

Peter Deen 7-11-95

7-12-95

6's

0700 Arrived on site at Bldg 87
 Pallets needed to change hose to
 water tank HNU

0800 Set up on P202
 0810 started first 55 on P202 Background 0 ppm
 0-2' 2" diameter low recovery 0 ppm

0820 2nd 55 at 4-6' low recovery 0 ppm
 0830 3rd 55 at 6-8' water at 7' 0 ppm
 0835 4th 55 at 10-12' 0 ppm
 0845 5th 55 at 14-16' 0 ppm
 1030 finished piezom after P202
 1 Down of Soil above/below
 water table

P202 start: 7-12-95

Fill: 7-12-95

Drilled to 16"

4 bags sand
 10ft screen 5 ft raise
 1 bucket Bentonite Pellets
 only one foot of sand above screen

Sunny very hot
 Health & Safety Briefing - wear safety glasses,
 if breaks need from head - take when
 needed

Atty Gen 7-12-95

7-12-95

65

1200 set up on P203 NW of Bldg 36
 1205 started Auguring HWH Background Oppm
 1230 finished 55 4'-6" 2' SS HWH Oppm
 1240 2nd 55 6'-8" Oppm
 Hit Water @ 7' Oppm
 1247 3rd 55 10'-12" Oppm
 1255 4th 55 14'-16" Oppm
 1410 finished Putting in P203
 5 bags of Sand
 1 bucket of Grout
 16 feet Screen
 5 foot Riser
 1 Drum Marked
 Soil above/below water table
 P203
 Started: 7-12-95
 Filled: 7-12-95
 1435 left site P203 went back to
 Bldg 47
 Talked to Capt. Punt about creating the
 cap on the pieometers this afternoon
 and clearance to go North of the
 Ramp
 1510 left Base - left site for Drillers at
 Gate about Time of Clearance North of Ramp

Pts. Placer 7-12-95

7-13-95

67

7:30 Met the drivers by Bldg 40 they were in the process of putting a pad (concrete) around PZ2. They said that they put a pad around PZ1 yesterday afternoon and because it was so hot, a few that quit for the day, will do PZ3 next this AM.

Capt. Smith said He received phone call from Concrete crews yesterday saying that they would be in at 11 AM today and that they may not make it to the Base today at all - they need more notice.

0925 PZ2 water level at 6.49'
0934 PZ1 water level at 6.76'
0942 PZ3 water level at 6.94'

Calculate GW Flow Direction to SW

Drew a Map & FAXed to Sat Palal and Hayley Jane Wihongi

Put out 3 proposed wells in Area 12 and one in 13.

After Much discussion we decided on 5 wells in Area 12 and one in Area 13

City Permit 71395

68

7-13-95

the one in Area 13. No more than 20-30 feet away from where the contamination was found in the SW direction. Capt. Bunt obtained a drawing to scale upon which we would mark the proposed Normalizing well locations for Area 12 and then FAX to Hopley. The concrete drillers notified us that they will not be on site until 10 AM tomorrow.

Sun very hot

Head Rtd Safety Briefing - take frequent breaks and Monitor head heat

Very hot >100°F wind from South few clouds

Peter J. Brown

7-13-95

7-13-95

69

1600 Set up at MW 13-01 Trench South of Pump. I skinned
1610 Start Drilling through Asphalt
16" of Asphalt. Gravel Rock Bit
1620 Start Drilling Past Asphalt using
HSA HNU Back ground CPM
1630 Took 1st SS 4-6' P 55 HNU Oppm
1630 Took 2nd SS 8-10' Oppm
Drillers Missed taking 6'-8' interval
Split Spoon and drilled past to 8'
We had asked them to take 6-8'
1635 Took 3rd SS 10-12' hit water at 11'
HNU Oppm
HNU Down hole = 98PM
1700 Took Shelby Tube 10-11' for Gravel chemical
1715 Took 4th SS HNU Oppm
1805 Trouble with sand bridging in the
augers will bring up sand to 6' x 6'
Picked the well with water level/
interface probe found water at about
8 ft
1845 finish at site 13 except for
grouting and cementing pad. Loaded
drum of sealant to take to Aug 47
1900 Left base

Peter J. Brown

7-13-95

7-14-95

71

0705 Arrived on Base Met with Capt
 Pant discussed location of wells
 in Area 12 and well in Middle
 of Contamination (Not in agreement
 with AN's policy per Hayley). Called
 Concrete drillers - will be out at 10 AM
 and drill 5 holes. Went out with
 Capt. Pant to ramp to locate wells
 MW12-01 thru MW12-05. Went back
 to Bldg 47 at 0930. Capt Pant
 would like us to work on the
 wells from west to east due
 to use of the ramp

1045 Went to lunch

1145 Met with Concrete Cores on Ramp
 He said that drill was not cutting
 because it lost some (8 of 12) of the
 cutting segments on it and he
 would have to go back to the shops
 to get them back on


1530 Concrete Core Back on base - Used Saw
 to cut holes (square) in MW12-01 and
 MW12-02 Completed by 1600. Told Dikro
 to start at MW12-01

1610 Drillers set up on MW12-01

It's Over 7-14-95

72

7-14-95

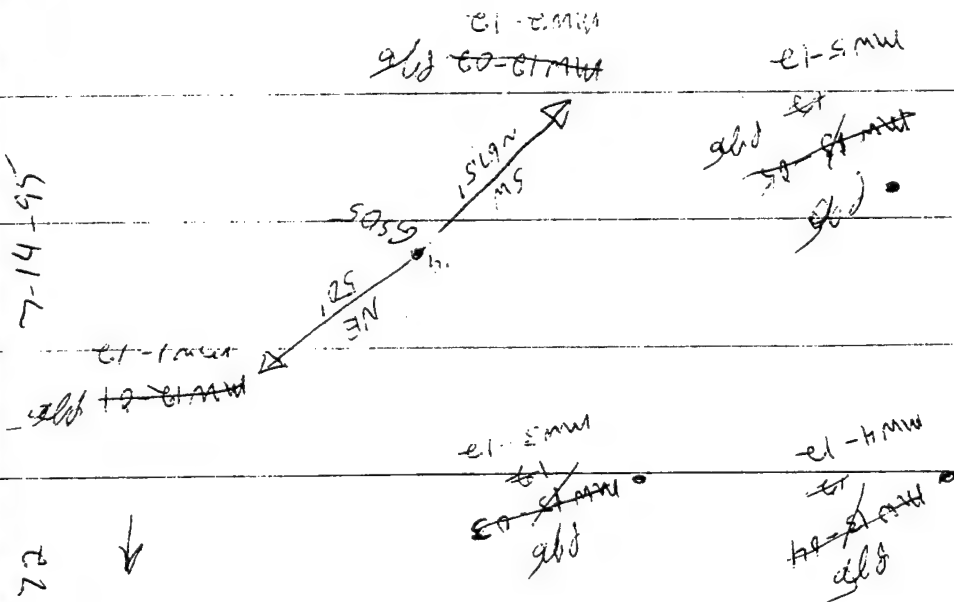

Health & Safety Briefing - use your hearing protection around air craft and drill rig
Hot, wind from South by Sunny

Pete Plummer 7-14-95

14-95

1639 Start drilling
1707 Took 1st SS 6-12
1715 Took 2nd SS 11-12
Talk to Carol Simpson about taking a N we
about 2 hrs - Logist will install from
1735 1600 SS 14-16
1850 Left Area to after, putting in NW-D-01
and putting two cones of each open
hole.
1900 Left Base. Sunny all day, had started
to get cloudy
Geologic sample taken at 14-16

73

NW-D-01 ground 1639
1707 Took 1st SS 6-12
1715 Took 2nd SS 11-12

Pete Plummer 7-14-95

7-15-95

0700 Mill Drillers out Bldg 47
 Weather Cloudy Rained last night
 Rain very light

0710 Set up on MW12-03

0720 Started drilling Background HNU oppm

0735 took 1st SS 6-8 9" diam 2 oppm

0740 took 2nd SS 10-12 9" diam 2 oppm

0755 took 3rd SS 14-16 9" diam 2 oppm

0830 Went back to Bldg 47 to call concrete
 Corers to find out when they will be out
 No one answered left message on machine for
 Jim Brinkwell - called Pat to update him
 on developments we plan to have the
 drillers develop wells if concrete holes
 are not drilled

0900 Completed well MW12-03 and
 went back to Bldg 47 2 oppms

0905 Concrete Corers called will be able
 to have hole cut by noon and last hole
 done 1900 shortly after.

0910 Drillers need to get Bentonite pellets

0945 Drillers leave to go to Sioux City to get
 pellets will be back about noon

1530 Drillers arrive back a Base

1540 Set-up on MW12-04

Bill Miller 7-15-95

76

7-15-95

Health and Safety Briefing - wear nitrile gloves ^{so that} chemicals are not absorbed through skin

7-15-95

1600 Take 1st spec 6-18' 3" diam HNU oppm
 HNU background oppm
 1605 Take 2nd spec 10-13' 3" diam HNU oppm
 1610 Took 3rd spec 14-16' 3" diam HNU oppm
 Drilled to 16'
 1635 Started Well Installation
 1640 HNU in well Augers spin
 1710 finish well and Driller went back to clean and drop off drums
 1715 The Concrete Crier finished last hole and left Base
 1740 Set up in MW12-05
 Was Very Cloudy at about 1700 but cleared up still cloudy but does not look like its going to storm temperature 80's
 1750 Started Drilling background HNU oppm
 1805 Take 1st spec 6-8' 3" diam HNU oppm
 1815 Took 2nd spec 10-13' 3" diam HNU oppm
 1825 Took 3rd spec 14-16' 3" diam HNU oppm
 Clouds cleared up
 1830 Start installing well
 1910 finished well and left to clean
 1925 Set up on MW13-03
 1930 started Drilling
 A lot of gravel above first split spoon

10/6/95 7-15-95

10/6/95 7-15-95

78

7-15-95

Geotech samples

	Depth
MW 12-01	14-16'
MW 12-02	6-8'
MW 12-03	10-13'
MW 12-04	6-8'
MW 12-05	6-8'
MW 13-01	12-14'

7-15-95

2010 Took first SS at 10' - 12' diameter HMEppm
 1 MW 12-01 Geotech sample
 The 6-8' interval SS was not taken because
 of all the gravel
 and auger slight come off string and
 drillers had to fish and the last string
 decided to call it day at 2055
 MW left Base

79

Aty Berman 7-15-95

Aty Berman 7-15-95

7-16-95

0800 Arrived on Base Sunny Hazy fog
 0805 Start Drilling build down again MW12-03
 0828 Drillers lost contact. Pump down the hole
 0857 Took last split spoon at 14-16' interval
 Backgroun MW14 0 ppm
 0900 H/NW reading 6 ppm
 Drilled down 18.16 ft
 1010 Completed MW12-03
 1015 Grouted MW12-03
 1030 " MW17-04
 1040 " MW12-05
 1045 " MW12-08
 1050 " MW12-01
 1100 Went back to Building H7 Dean Pump
 1100 Go to MW13-01
 wider H7. 1135 low water (since it is an
 interface pipe) will have to pump to bottom of
 the screen and will not measure pump
 1130 Water level taken 8.00 ft depth to bottom
 1135 The Drillers are having difficulties with
 getting their grout pump to work
 1200 H/NW Down hole = 6 ppm
 1217 of Initial Reading 12165
 1200 pm Conductivity
 pH 6.75

81

John Deere 1107-16-95

7-16-95

When developing the well the pump was located about 1-2 ft from the bottom of the well and moved up and down to different levels and pumped until clear and parameters became steady and then moved to another level and back down to the bottom of the well and started over until all parameters are steady.

Health and Safety Briefing - wear eye protection against splash hazards

M. Brown 7-16-95

7-16-95

Bailed out about 1 gallon. Cannot get a water level during pumping due to the size of the interface probe.

1330 finished developing MW 13-01.

1340 Dumped water down drain.

Marked Grid Points and Geoprobe Sites at Areas 12 + 13.

Area 12 - Geoprobe GS-01 then GS-05 ^{GPS}

SDV - marked V-1, ~~V-4~~, V-7, V-11, and V-17.

Area 13 - Geoprobe marked S-1 thru S-4.

SDV (water) marked W-1, W-4, W-18, and W-20.

1455 Loc. Base

M. Brown 7-16-95

7-17-95

85

0700 Arrived on site Bldg 47
 0710 Setup for well development on
 well MW13-01
 0714 Reading 389M and then Campbell down 47m
 0715 1100 No elevated Reading, a area
 around well or Development Water
 or down well
 0730 I went back to Bldg 47 to make
 some phone calls & FAX's
 0830 Built up MW13-01
 0840 Well developed - went back to get
 h/c
 0845 Go back to Bldg 47 to recon
 0915 Set up on MW13-02
 1100 initial up to 45 ppm and
 then came back down to 0 ppm
 Failed out about 15 gallons
 0935 Started pumping
 1045 Recalibrate Campbell Meter Run 18" the
 Temp dial being bumped
 1115 Complete developing well
 1130 Went to lunch
 1200 Dumped water and decr pump
 I made several phone calls
 Tracy went out and developed MW13-03

0800-7-17-95
 0800-7-17-95

7-17-95

Health & Safety Briefing - When moving drums
watch out for pinned hands (drum
and truck hand in between)

7-17-95

With Mark from Lynne
started at 1255 and completed development
at 1405 Dumped water at 1430
and then Decored Pump
1505 Started developing MW 12-04
1630 finished developing MW 12-04
From 1615 to 1615 Turned on the type back
at Bldg 47 giving over paper work
for drillers charges
1650 After dumping Dev. Water and Decorn
Move to MW 12-05 to start developing
HNU heading in Well C.S. room
Completed Development of MW 12-05
HNU heading of Dev Water Pump
1620 Dumped Dev. Water Went Back to
Bldg 47 to Decorn and turn down
Decorn pool and do paper work for today
1910 Left Bldg.

Optimum 7-17-95

Optimum 7-17-95

89

07-18-95
 0730 Pick up Ryder truck and then
 generator and Ice
 CE45 Arrive on Base pick up sampling
 equipment and tank for purge water
 0900 Trip Blank
 0905 TPEX, TPEX Solvents
 0915 FBO3, Pot Water Sample
 0920 FBO4, TPEX, Solvents
 1000 FBO4 ASTM II Water Sample
 1005 BTEX, TPEX, Solvents
 1035 MW in well 12 ppm then back
 down to 25 ppm MW 13-01
 1049 Start purging MW 13-01
 1110 finished purging & sampled well
 0711, TPEX, Solvents
 EBC5 Equipment Blank
 1130 BTEX, TPEX, Solvents
 1145 Duplicate Sample for MW 13-01
 Labeled as MW 13-01
 1300 MW 13-01 sampled
 1330 MW 13-01 Duplicate of MW 13-01
 1410 finished purging MW 13-01 and
 started sampling MW 1-12-01
 BTEX, TPEX
 1450 finished purging MW 12-03 and
 7-18-95 PBR

90 7-18-95

Health & Safety Briefing - Monitor wells
with H₂S and Breathing Zone before
starting work steady
Sunny all day few clouds wind
from the North Temp 80's to 90's

7-18-95

Started Sampling 1450 Labeled MW3-12-01
BTEx TPH
Finished Pumping MW 12-04
and Started Sampling MW4-12-01
BTEx TPH
1450 Finished Pumping MW 12-05
and Sampled Labeled MW5-12-01
BTEx TPH
1710 Finished at MW 12-05 and
went to dump water (purge water)
1900 Left Base

PPB 7-18-95

PPB 7-18-95

92

7-101-95

0815

Couler ramp
Summe 30.00

(3 eachers) all the

93

7-19-95

B-28-95

Picked up Ryder truck and generator
 Picked up ^{12 ft} ~~12 ft~~ ^{12 ft} ~~12 ft~~ bottles from Lab
 12 ft Ryder truck on base and marked
 bottles back at the motel

Apenn B-28-95

0829-95

97

0730 Arrived on Base after packing car and getting
 fuel

Met off 0730 Captain Hunt asked about
 disposal of Purple Water. He said he would
 find a way to dispose of it.

Called Trinkle and prepared for sampling

0910 F306 sample of the RT Water
 (ASTM Type II) used for deion. Rinse

0910 F306 Sample of the Tap water
 used for deion water

0950 Arrived Area 13 MW1-13

HNU Reeking 0 ppm # below top of casing PVC
 Water level at 8.33 gpm

2nd Well 1 well volume = 176 gal

Initial

Temp 68.1 °F

Cond. 17.00 x100 uS/cm

pH 6.88

1 well volume 2nd 3rd 4th 5th 6th

Temp °F 61.1 60.5 60.8 59.8 59.4 59.4

Cond. uS/cm 16.0 15.84 15.48 15.10 15.24 14.98

pH 6.86 6.96 6.69 6.89 6.96 6.59

finished purging 10:20

Started Sampling 10:30

Completed Sampling 10:45

Perman 8-29-95

98 08-29-95

Cloudy Wind from SE Temp ranging from 70's to 80's humid - Rained very hard last night and late yesterday 8-28-95 up to 3 inches in parts of Sioux Falls

08-29-95

99

1115 Took water level measurement at 1201 = 7.25 ft

1119 Water level at MW01-12 HNM Oppm

Had problems with getting a number and pump was boggy - Called Haco

Went and got another generator

Tracy ~~put~~ the well with a boiler I arrived put get

back at 1300 and decored the pump and hose

Tracy sampled MW1-12-02 at 1300

At 1335 we set up a MW2-12

HNM Oppm

1350 started pumping MW5-12 with grout pump

1415 Completed pumping

1420 Started sampling MW5-12-02

Completed sampling at 1430

Duplicate taken MW6-12-02 taken at

MW5-12-02 and given time of 1230

1500 opened up MW4-12 1991-HNM

1535 Completed pumping

1536 Sampled MW4-12 = MW4-12-02

1540 Completed sampling

1545 Set up on MW3-12

HNM = 1.5 ppm

1550 started pumping MW3-12

Pete J. Brown 8-28-95

Pete J. Brown 8-28-95

700 08-29-95

All the wells on the ramp have water in the cap area which was several inches deep to 12 inches. The caps do not have a rubber seal. The caps to the wells are sealed and none of them appear to have leaked

24
195
195

08-29-95

0829-95

101

1637 Completed Pumping
1640 Sampled MW3-12 Completed Sampling 1650
1655 Set up on MW2-12
HNA-2 ppm
1701 Started Pumping Well
1755 Completed Pumping Well
1800 Started Sampling Well
1830 Completed Pumping Well
Back MS and MSD at this well
Sampled MW2-12-22, MSD1, and MSD2
1930 16 ft base
put more ice on samples at motel

08-29-95

08-30-95

103

0645 Filled out chain of custody
and packed samples in coolers. Temp 33°C

0800 Arrived on page

0821 MW 12-03 Water level at 8.27 ft

0824 MW 12-04

0829 MW 12-05

0834 P203

0839 MW 12-02

0843 MW 12-01

0848 P201

0853 P202

0858 MW 13-01

Tracy Bagg took samples to the Lab
(Huntingdon) while Capt. Punt and I
Broke whaler level measurements in the
Wells and Piezometers.

We then dumped water down sanitary
sewer drain. Tracy slipped and fell
partway into sewer trap box where
we were dumping the purge water.
We then returned the truck, generator
and shipped rental equipment to Haco.
Tracy then took a shower and we checked
out of the motel. Met with Capt. Punt
in the afternoon to pack equipment.

08-30-95

184

8-30-95

and turn over to base. Shopped central
equipment back to Harcey.

105

11 Penn 8-30-95

148

HNU PID Model PI 101 Rental Huntington
S/N 801192 6-15-95
10.2 eV probe

HNU PID Model PI 101 Rental HAZCO
S/N 101192 7-11-95
10.2 eV probe Hazco S/N 2288

Hydacs Conductivity/Temperature/pH
Beta Technology Inc. S/N 9402 7-11-95
Rental HAZCO # 68211

HNU PID Model PI 101 Rental Hazco
S/N Hazco # 9214 16 8-28-95
10.2 eV probe

Sulinsat Water level Meter SN 17037 8-28-95
Hazco Rental Hazco # 12709

Hydacs Conductivity/Temperature/pH
Beta Technology Inc. SN 9402 8-28-95
Hazco Rental Hazco # 6841

149

METE INVENTORY

HNU PID Model HW-101 HAZCO Rental
Serial Number: 470013 6/8/95 -
HAZCO # : 6731
10.2 eV Probe HNU Serial # : 270105

CALIBRATION GAS:
100 ppm ISOBOXYGENE
HAZCO SERVICES MFG. DATE 05/95
LOT # : 42465

HYDAC Conductivity, Temperature,
pH, TSS, Turbidity, Beta Technology Inc.
Serial # : 9502
HAZCO Rental: 6/13/95 -
HAZCO # : 12748

WATER LEVEL INDICATOR:
HAZCO DIAPHRAGM PUMP WATER LEVEL
HAZCO REMOTE
HAZCO Rental: 6/13/95 -
HAZCO # : 3438

150

151

EQUIPMENT ID	DATE	IRE	ADJUST	TEST	CONDITION	INITIALS
HNU 6731	6/12/95	52 ppm	—	52 ppm	OK	MCC
HNU 6731	6/13/95	52 ppm	—	52 ppm	OK	MCC
H DAC	6/13/95	7.0 3.93 983%		7.4 4.0 1,000% (ok)	OK	MCC
HNU 6731	6/15/95	52 ppm	Spaced	52 ppm	OK	MCC
H DAC	6/15/95	10.47 7.07 7.47	Adjust Adjust Adjust	1500 7.00 4.04	OK	MCC
HNU 80192	6-15-95	55	None	55	OK	PJB
H DAC	6/16/95	10.38 7.00 4.14	ADJUST	1380 7.00 4.09	OK	MCC
H NU 2280	7-11-95	68	Adjust	100	OK	PJB
H NU 2280	7-12-95	100	None	100	OK	PJB
H NU 2280	7-13-95	100	None	100	OK	PJB
H NU 2280	7-14-95	90	Adjust	100	OK	PJB
H NU 2280	7-15-95	100	None	100	OK	PJB
H NU 2280	7-16-95	100	None	100	OK	PJB
H DAC 65	7-16-95	und	None	1.01	OK	PJB
		0.91	Adjust	7.00	OK	PJB
		16.02	Adjust	10.00	OK	PJB
		4.00	Adjust	4.00	OK	PJB
			None	100 ppm	OK	PJB
	7-17-95	97	Adjust			PJB

Equipment ID	Date	PRE	Adjust	POST	Condition	Initials
Hydac 6841	7-17-95	Cond. 7.66 PH 7.07 10.00 4.00	Adjust Adjust Cond None	12.00 7.00 10.00 4.00	OK OK OK OK	PJB PJB PJB PJB
Hydac 6841	7-17-95	Cond. 9.70	Adjust	10.00	OK	PJB
Hydac 6841	7-16-95	Cond. 7.06 3.97 10.00	Adjust Adjust Adjust None	7.00 4.00 10.00 10.00	OK OK OK OK	PJB PJB PJB PJB
Hydac 6841	7-16-95	9.8 7.06	Adjust	10.00	OK	PJB
HN19014	8-29-95	6.6	Adjust	1.00	OK	PJB
Hydac 6841	8-29-95			7.00 4.00	OK OK	PJB PJB

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390

391

392

393

394

395

396

397

398

399

400

401

402

403

404

405

406

407

408

409

410

411

412

413

414

415

416

417

418

419

420

421

422

423

424

425

426

427

428

429

430

431

432

433

434

435

436

437

438

439

440

441

442

443

444

445

446

447

448

449

450

451

452

453

454

455

456

457

458

459

460

461

462

463

464

465

466

467

468

469

470

471

472

473

474

475

476

477

478

479

480

481

482

483

484

485

486

487

488

489

490

491

492

493

494

495

496

497

498

499

500

501

502

503

504

505

506

507

508

509

510

511

512

513

514

515

516

517

518

519

520

521

522

523

524

525

52

APPENDIX M
FIELD CHANGE ORDER

THIS PAGE WAS INTENTIONALLY LEFT BLANK



An Employee-Owned Company

Field Change Order (FCO)

FCO No.: 1
 Modification No.: 01 Date: 6-26-95 Work Authorization:
 Type of Change: Subcontract Cost Priority: ☐ Emergency ☐ Urgent ☒ Routine
 Control No.: _____ Project No.: 01-0827-04-3423-C08

Requester Identification:

Name: TAMARA PAPER Organization: SAIC Phone: (703) 749-8903
 Title: PROJECT MANAGER Signature: [Signature]

Baseline Identification:

Baseline(s) Affected: ☒ Cost ☒ Scope ☐ Milestones ☐ Method of Accomplishment
 Revision Number: 1 Field Manager: PERT FERRELL

Description of Change:

Phone: (614) 793-7600

- # of Geoprobe points at Site 12 were changed from 8 to 5.

Justification:

- Change made in field at the request of Alan Klavins, ANERC Project Engineer - As per conversation on 6-13-95 and Captain Punt on 6-13-95
- Geoprobe points to be potentially used at Site 1.
- No major contamination detected at Site 12 from soil survey.

Impact of Implementing Request:

- Based on soil survey results, this change will result in minimal impact on characterizing nature & extent of contamination at Site 12.

Participants Affected by Implementing Request:

- ANERC & STARK

Cost Estimate: \$ _____

Estimator Signature: [Signature]

Phone: (703) 749-8903

Date: 6/26/95

Previous FC Affected: ☐ Yes ☒ No

Approval:

Project Manager Signature: [Signature]

Date: 6/26/95

CAS Review: _____

Date: _____

Time from Initiation to Action: _____

Client Signature: _____

Date: _____

Science Applications International Corporation ■ 1710 Goodridge Drive, McLean, Virginia 22102
 White: PM Yellow: Field Manager Pink: Supervisory Geologist Goldwood: Field Book



An Employee-Owned Company

Field Change Order (FCO)

FCO No.: 2

Modification No.: 01

Date: 6-26-95

Work Authorization:

Type of Change: Subsequent Cost

Priority:

☐ Emergency ☐ Urgent ☒ Routine

Control No.:

Project No.: 01-0P27-04-3423-008

Requester Identification:

Name: Sharon P. Lee

Organization:

SAIC

Phone: (703) 779-8903

Title: Project Manager

Signature: [Signature]

Baseline Identification:

Baseline(s) Affected:

☒ Cost

☒ Scope

☐ Milestones

☐ Method of Accomplishment

Revision Number: 1

Field Manager:

PETER PETERSON

Description of Change:

Phone: (614) 793-7600

1. No onsite screening of water sample from 5 Emergency ph & Site 12.

Justification:

1. Water sample being sent to the laboratory (Humboldt) for BTEX & TPH analysis.
2. Drilling program delayed by until all data from field screening and Humboldt.

Impact of Implementing Request:

1. No impact on obtaining nature of groundwater contamination at Site 12. Data to be obtained from groundwater sample sent to Humboldt.

Participants Affected by Implementing Request:

1. ANDREY SVANG

Cost Estimate: \$ _____

Estimator Signature: [Signature]

Phone: _____

Date: _____

Previous FC Affected: ☐ Yes ☒ No

Approval:

Project Manager Signature: [Signature]

Date: 6/26/95

CAS Review: _____

Date: _____

Time from Initiation to Action: _____

Client Signature: _____

Date: _____

Science Applications International Corporation ■ 1710 Goodridge Drive, McLean, Virginia 22102
White: File Yellow: Field Manager Pink: Supervisory Geologist Goldenrod: Field Book

FCO NO <u>03</u>		Field Change Order (FCO)	
MODIFICATION NO. <u>01</u>	DATE <u>8-9-95</u>	WORK AUTHORIZATION _____	
TYPE OF CHANGE _____		PRIORITY <input type="radio"/> EMERGENCY <input type="radio"/> URGENT <input type="radio"/> ROUTINE	
ADS NO. _____	CWFP NO. _____	CWBS NO. _____	<input checked="" type="radio"/> MINOR <input type="radio"/> MAJOR <input type="radio"/> OTHER
REQUESTER IDENTIFICATION			
NAME <u>Peter J. Ferion</u>		ORGANIZATION <u>SALC</u>	PHONE <u>(614) 793-7600</u>
TITLE <u>Site Investigation Specialist</u>		SIGNATURE <u>Peter J. Ferion</u>	
BASELINE IDENTIFICATION			
BASELINE(S) AFFECTED <input type="radio"/> COST <input type="radio"/> SCOPE <input type="radio"/> MILESTONES <input type="radio"/> METHOD OF ACCOMPLISHMENT			
PROGRAM SERVICE ORDER NO. _____		REVISION NO. <u>01</u>	CAM SIGNATURE <u>Peter J. Ferion</u>
DESCRIPTION OF CHANGE		PHONE <u>(614) 793-7600</u>	
<u>SOV sampling depths were only 3 instead of 6 at Site 12 and 5 at Site 13</u>			
JUSTIFICATION			
<u>The groundwater was at about 7 ft ^{Site 12} and the SOV could not be taken in the groundwater (at about 9 ft for Site 13) change made in field as per request of ANGRC Project Geologist.</u>			
IMPACT OF IMPLEMENTING REQUEST			
<u>Instead of 300 SOV samples (50 points x 6 depths) at Site 12 and 28 SOV samples at Site 13 (8 points x 5 depths); 152 samples were taken at Site 12 and 24 SOV samples were taken at Site 13 (6 points x 4 depths).</u>			
PARTICIPANTS AFFECTED BY IMPLEMENTING REQUEST			
<u>ANGRC & SDANG</u>			
COST ESTIMATE \$ _____		ESTIMATOR SIGNATURE <u>[Signature]</u>	
		PHONE <u>(703) 749-8903</u>	DATE <u>8/11/95</u>
PREVIOUS FC AFFECTED <input type="radio"/> YES <input checked="" type="radio"/> NO			
APPROVAL			
PROJECT MANAGER SIGNATURE <u>[Signature]</u>		DATE <u>8/11/95</u>	
QAS REVIEW _____		DATE _____	
TIME FROM INITIATION TO ACTION _____			

Figure 10-6. Field Change Request Form

FCO NO <u>04</u>		Field Change Order (FCO)	
MODIFICATION NO. <u>01</u>		DATE <u>8-9-95</u>	WORK AUTHORIZATION _____
TYPE OF CHANGE _____		PRIORITY <input type="radio"/> EMERGENCY <input type="radio"/> URGENT <input type="radio"/> ROUTINE	
ADS NO. _____	CYWP NO. _____	CWBS NO. _____	<input type="radio"/> MINOR <input type="radio"/> MAJOR <input type="radio"/> OTHER
REQUESTER IDENTIFICATION			
NAME <u>Peter J. Ferron</u>		ORGANIZATION <u>SAIC</u>	PHONE <u>(614) 793-7600</u>
TITLE <u>Site Investigation Specialist</u>		SIGNATURE <u>Pete Ferron</u>	
BASELINE IDENTIFICATION			
BASELINE(S) AFFECTED <input type="radio"/> COST <input type="radio"/> SCOPE <input type="radio"/> MILESTONES <input type="radio"/> METHOD OF ACCOMPLISHMENT			
PROGRAM SERVICE _____		REVISION NO. <u>01</u>	CAM SIGNATURE <u>Peter J. Ferron</u>
ORDER NO. _____		PHONE <u>(614) 793-7600</u>	
DESCRIPTION OF CHANGE			
<u>Depths of the Wells and Piezometers 15 feet BLS instead of 25 ft BLS and the screen 2 ft above the water table to 8 ft below instead of straddling the water table</u>			
JUSTIFICATION			
<u>The water table was 6 to 8 ft BLS change made in field as per request of ANGRC Project Geologists</u>			
IMPACT OF IMPLEMENTING REQUEST			
<u>The well placement at this depth will provide a better well for during seasonal fluctuations in groundwater elevation</u>			
PARTICIPANTS AFFECTED BY IMPLEMENTING REQUEST			
<u>ANGRC & SDANG</u>			
COST ESTIMATE \$ _____		ESTIMATOR SIGNATURE <u>[Signature]</u>	
		PHONE <u>(703) 749-8903</u>	DATE <u>8/11/95</u>
PREVIOUS FCO AFFECTED <input type="radio"/> YES <input checked="" type="radio"/> NO			
APPROVAL			
PROJECT MANAGER SIGNATURE <u>[Signature]</u>		DATE <u>8/11/95</u>	
OAS REVIEW _____		DATE _____	
TIME FROM INITIATION TO ACTION _____			

Figure 10-6. Field Change Request Form

FCO NO <u>05</u>		Field Change Order (FCO)	
MODIFICATION NO. <u>01</u>	DATE <u>8-9-95</u>	WORK AUTHORIZATION _____	
TYPE OF CHANGE _____		PRIORITY <input type="radio"/> EMERGENCY <input type="radio"/> URGENT <input type="radio"/> ROUTINE	
ADS NO. _____	CWFP NO. _____	CWBS NO. _____	<input checked="" type="radio"/> MINOR <input type="radio"/> MAJOR <input type="radio"/> OTI
REQUESTER IDENTIFICATION			
NAME <u>Peter J. Ferron</u>		ORGANIZATION <u>SAIC</u>	PHONE <u>(614) 793-7600</u>
TITLE <u>Site Investigation Specialist</u>		SIGNATURE <u>Peter J. Ferron</u>	
BASELINE IDENTIFICATION			
BASELINE(S) AFFECTED <input type="radio"/> COST <input type="radio"/> SCOPE <input type="radio"/> MILESTONES <input type="radio"/> METHOD OF ACCOMPLISHMENT			
PROGRAM SERVICE ORDER NO. _____		REVISION NO. <u>01</u>	CAM SIGNATURE <u>Peter J. Ferron</u>
DESCRIPTION OF CHANGE		PHONE <u>(614) 793-7600</u>	
<p>Sand pack was brought up to 1 foot above the top of the screen instead of 2 ft.</p>			
JUSTIFICATION			
<p>Two feet of sand would have brought up the bentonite seal too close to the surface and there would not be enough room for growth, and lowering the well would put the water table only one foot ^{below} above the top of the screen.</p>			
EFFECT OF IMPLEMENTING REQUEST			
<p>Based on the amount of room at the top of the water table and the need for 2 feet of bentonite seal and a minimum of one foot of growth, one foot of sand was the better alternative to lowering the well.</p>			
PARTICIPANTS AFFECTED BY IMPLEMENTING REQUEST			
<u>ANGRC + SDANG</u>			
COST ESTIMATE \$ _____		ESTIMATOR SIGNATURE <u>[Signature]</u>	
		PHONE <u>(714) 749-8903</u>	DATE <u>8/4/95</u>
PREVIOUS FCO AFFECTED <input type="radio"/> YES <input checked="" type="radio"/> NO			
APPROVAL			
PROJECT MANAGER SIGNATURE <u>[Signature]</u>		DATE <u>8/11/95</u>	
OAS REVIEW _____		DATE _____	
TIME FROM INITIATION TO ACTION _____			

Figure 10-6. Field Change Request Form

FCO NO <u>06</u>		Field Change Order (FCO)	
MODIFICATION NO. _____		DATE <u>8-9-95</u>	WORK AUTHORIZATION _____
TYPE OF CHANGE _____		PRIORITY <input type="radio"/> EMERGENCY <input type="radio"/> URGENT <input type="radio"/> ROUTINE	
ADS NO. _____	CYWP NO. _____	CWBS NO. _____	<input type="radio"/> MINOR <input type="radio"/> MAJOR <input type="radio"/> OTI
REQUESTER IDENTIFICATION			
NAME <u>Peter J. Ferron</u>		ORGANIZATION <u>SAIC</u>	PHONE <u>(614) 773-7600</u>
TITLE <u>Site Investigation Specialist</u>		SIGNATURE <u>Peter J. Ferron</u>	
BASELINE IDENTIFICATION			
BASELINE(S) AFFECTED <input type="radio"/> COST <input type="radio"/> SCOPE <input type="radio"/> MILESTONES <input type="radio"/> METHOD OF ACCOMPLISHMENT			
PROGRAM SERVICE _____		REVISION NO. <u>01</u>	CAM SIGNATURE <u>Peter J. Ferron</u>
ORDER NO. _____		PHONE <u>(614) 773-7600</u>	
DESCRIPTION OF CHANGE			
<u>One - two inch well was installed at Site 13 instead of 2 wells</u>			
JUSTIFICATION			
<u>Change made in field at the request of ANGRCL Project Geologist</u> <u>No major contamination detected at Site 13 from SOV, and Geoprobe</u> <u>soil and groundwater samples</u>			
IMPACT OF IMPLEMENTING REQUEST			
<u>Based on SOV, and Geoprobe sample results, this change will result in</u> <u>minimal impact on characterizing the nature and extent of contamination</u> <u>at Site 13</u>			
PARTICIPANTS AFFECTED BY IMPLEMENTING REQUEST			
<u>ANGRL + SDANG</u>			
COST ESTIMATE \$ _____		ESTIMATOR SIGNATURE <u>[Signature]</u>	
		PHONE <u>(703) 749-8900</u>	DATE <u>8/11/95</u>
PREVIOUS FCO AFFECTED <input type="radio"/> YES <input checked="" type="radio"/> NO			
APPROVAL			
PROJECT MANAGER SIGNATURE <u>[Signature]</u>		DATE <u>8/11/95</u>	
GAS REVIEW _____		DATE _____	
TIME FROM INITIATION TO ACTION _____			

Figure 10-6. Field Change Request Form

Field Change Order (FCO)			
FOO NO. <u>07</u>	DATE <u>8-9-95</u>	WORK AUTHORIZATION _____	
MODIFICATION NO. _____	PRIORITY <input type="radio"/> EMERGENCY <input type="radio"/> URGENT <input type="radio"/> ROUTINE		
TYPE OF CHANGE _____	ADS NO. _____	CYWP NO. _____	CWBS NO. _____
REQUESTER IDENTIFICATION		<input type="radio"/> MINOR <input type="radio"/> MAJOR <input type="radio"/> OTI	
NAME <u>Peter J. Ferron</u> ORGANIZATION <u>SAIL</u>		PHONE <u>(614) 793-7600</u>	
TITLE <u>Site Investigation Specialist</u> SIGNATURE <u>Peter J. Ferron</u>			
BASELINE IDENTIFICATION			
BASELINE(S) AFFECTED <input type="radio"/> COST <input type="radio"/> SCOPE <input type="radio"/> MILESTONES <input type="radio"/> METHOD OF ACCOMPLISHMENT			
PROGRAM SERVICE _____		REVISION NO. <u>01</u>	
ORDER NO. _____		CAM SIGNATURE <u>Peter J. Ferron</u>	
DESCRIPTION OF CHANGE		PHONE <u>(614) 793-7600</u>	
<u>Five 4-inch Wells were installed at Site 12, (instead of 4)</u>			
JUSTIFICATION			
<u>Change made in the field at the request of ANGRC Project Geologist</u> <u>Groundwater flow direction fluctuations due to high water table and</u> <u>pumping of municipal wells need to surround source areas</u>			
IMPACT OF IMPLEMENTING REQUEST			
<u>Based on the fluctuations in Groundwater flow direction, the additional</u> <u>well at Site 12 will provide better characterization of the nature</u> <u>and extent of Contamination at Site 12</u>			
PARTICIPANTS AFFECTED BY IMPLEMENTING REQUEST			
<u>ANGRC + SDANG</u>			
COST ESTIMATE \$ _____		ESTIMATOR SIGNATURE <u>[Signature]</u>	
		PHONE <u>(713) 749-8904</u> DATE <u>8/11/95</u>	
PREVIOUS FCO AFFECTED <input type="radio"/> YES <input checked="" type="radio"/> NO			
APPROVAL		DATE <u>8/11/95</u>	
PROJECT MANAGER SIGNATURE <u>[Signature]</u>			
QAS REVIEW _____		DATE _____	
TIME FROM INITIATION TO ACTION _____			

Figure 10-6. Field Change Request Form

FCO NO. <u>08</u>		Field Change Order (FCO)	
MODIFICATION NO. _____		DATE <u>8-9-95</u>	WORK AUTHORIZATION _____
TYPE OF CHANGE _____		PRIORITY <input type="radio"/> EMERGENCY <input type="radio"/> URGENT <input type="radio"/> ROUTINE	
ADS NO. _____	CYMP NO. _____	CWBS NO. _____	<input checked="" type="radio"/> MINOR <input type="radio"/> MAJOR <input type="radio"/> OTHER
REQUESTER IDENTIFICATION			
NAME <u>Pete Ferron</u>		ORGANIZATION <u>SAIC</u>	PHONE <u>(614) 723-7600</u>
TITLE <u>Site Investigation Specialist</u>		SIGNATURE <u>Pete Ferron</u>	
BASELINE IDENTIFICATION			
BASELINE(S) AFFECTED <input type="radio"/> COST <input type="radio"/> SCOPE <input type="radio"/> MILESTONES <input type="radio"/> METHOD OF ACCOMPLISHMENT			
PROGRAM SERVICE _____		REVISION NO. <u>01</u>	CAM SIGNATURE <u>Peter J. Ferron</u>
ORDER NO. _____		PHONE <u>(614) 723-7600</u>	
DESCRIPTION OF CHANGE			
<u>Disposable Bailers used in sampling wells rather than decontaminating teflon or stainless steel bailers</u>			
JUSTIFICATION ^{CWBS-}			
<u>No chance of decontamination of wells by using the same bailers cut down on the generation of decontamination fluids</u>			
IMPACT OF IMPLEMENTING REQUEST			
<u>No impact on obtaining nature of groundwater contamination</u>			
PARTICIPANTS AFFECTED BY IMPLEMENTING REQUEST			
<u>ANGRC + SDANG</u>			
COST ESTIMATE \$ _____		ESTIMATOR SIGNATURE <u>[Signature]</u>	
		PHONE <u>(614) 749-8903</u>	DATE <u>8/4/95</u>
PREVIOUS FCO AFFECTED <input type="radio"/> YES <input checked="" type="radio"/> NO			
APPROVAL			
PROJECT MANAGER SIGNATURE <u>[Signature]</u>		DATE <u>8/11/95</u>	
QAS REVIEW _____		DATE _____	
TIME FROM INITIATION TO ACTION _____			

Figure 10-6. Field Change Request Form

Field Change Order (FCO)			
FCO NO. <u>09</u>	DATE <u>8-9-95</u>	WORK AUTHORIZATION _____	
MODIFICATION NO. _____	PRIORITY <input type="radio"/> EMERGENCY <input type="radio"/> URGENT <input type="radio"/> ROUTINE		
TYPE OF CHANGE _____	ADS NO. _____	CYMP NO. _____	CWBS NO. _____
		<input checked="" type="radio"/> MINOR <input type="radio"/> MAJOR <input type="radio"/> OTI F	
REQUESTER IDENTIFICATION			
NAME <u>Peter J. Ferron</u>		ORGANIZATION <u>SAIC</u>	PHONE <u>(614) 793-7600</u>
TITLE <u>Site Investigation Specialist</u>		SIGNATURE <u>Peter J. Ferron</u>	
BASELINE IDENTIFICATION			
BASELINE(S) AFFECTED <input type="radio"/> COST <input type="radio"/> SCOPE <input type="radio"/> MILESTONES <input type="radio"/> METHOD OF ACCOMPLISHMENT			
PROGRAM SERVICE _____		REVISION NO. <u>01</u>	CAM SIGNATURE <u>Peter J. Ferron</u>
ORDER NO. _____		PHONE <u>(614) 793-7600</u>	
DESCRIPTION OF CHANGE			
<u>Sample Containers were not rinsed three times with groundwater before filling</u>			
JUSTIFICATION			
<u>EPA Specified cleaned bottles</u> <u>Contained preservative in bottles which would be lost if rinsed three times</u>			
IMPACT OF IMPLEMENTING REQUEST			
<u>No impact on obtaining nature of groundwater contamination</u>			
PARTICIPANTS AFFECTED BY IMPLEMENTING REQUEST			
<u>ANGRC + SDANG</u>			
COST ESTIMATE \$ _____		ESTIMATOR SIGNATURE <u>[Signature]</u>	
		PHONE <u>(703) 749-8903</u>	DATE <u>8/4/95</u>
PREVIOUS FCO AFFECTED <input type="radio"/> YES <input checked="" type="radio"/> NO			
APPROVAL			
PROJECT MANAGER SIGNATURE <u>[Signature]</u>		DATE <u>8/11/95</u>	
QAS REVIEW _____		DATE _____	
TIME FROM INITIATION TO ACTION _____			

Figure 10-6. Field Change Request Form